




OregonProducts.com

2024

This catalogue is regularly updated
new sections will be added soon.

V.01.2024

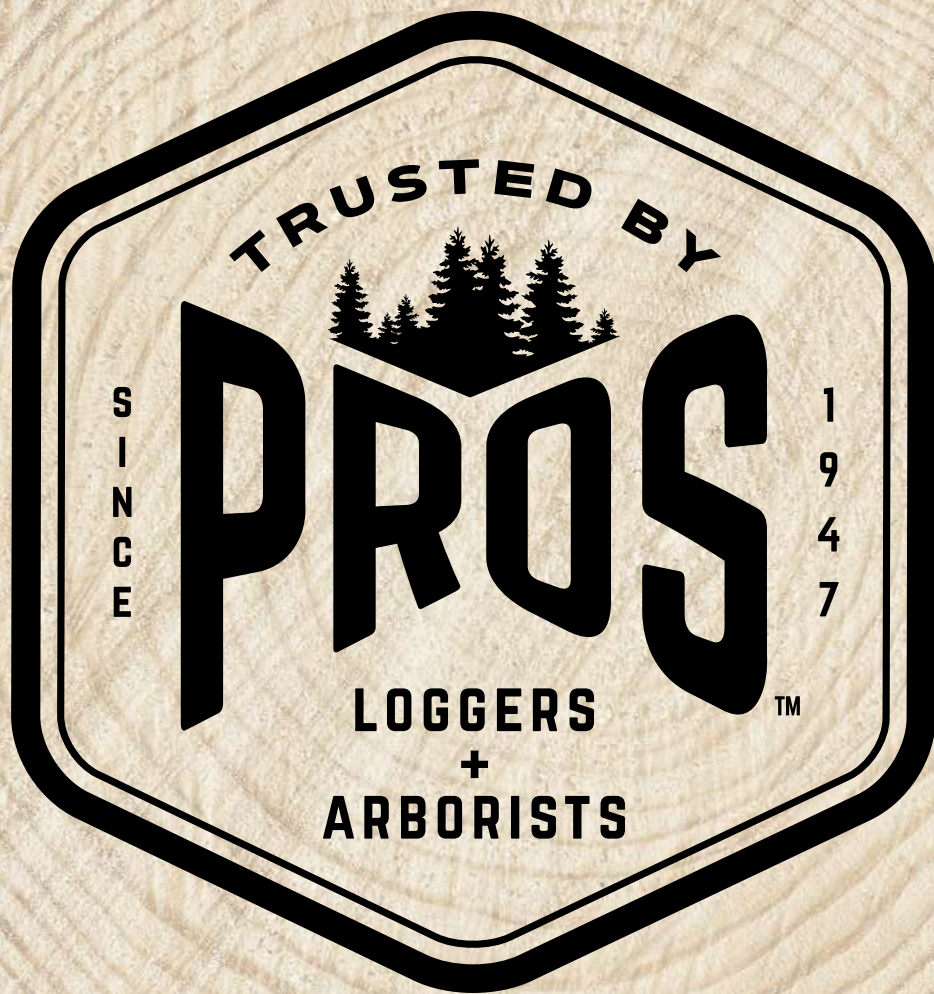

OREGON®

SAW CHAINS AND GUIDE BARS

CB_1.2
EN/EUR







SHARPER BY NATURE

1947 ushered in a better way of woodcutting when logger Joseph Buford Cox realised how easily timber-beetle larvae can chew through timber, creating the first revolutionary Oregon saw chain that duplicated their alternating C-shaped jaws in steel. From the invention of modern saw chain to research innovations that reduce injury-causing kickback, Oregon has always been the industry leader. There's a reason we're the world's number-one in saw chain, guide bars, sprockets, forestry accessories, lawnmower blades and outdoor equipment parts.



Product Families

Oregon understands that the needs of woodcutters – professionals and novices – are as diverse as the terrains and environments in which they work.

We have organized our saw chains into product families with key characteristics that different users will value. These product families will help ensure that you choose the right chain based on your everyday needs – helping to make understanding the differences between our chains effortless.

To help easily identify our tiers of products, packaging is differentiated by color. Products within families meeting the needs of occasional users will be indicated by gray or white packaging. Product families targeted at demanding professional users will be indicated by black packaging.

OCCASIONAL USERS - Basic Products



IDENTIFIED BY WHITE PACKAGING

Standard replacement chain for homeowners using a chainsaw occasionally. User-friendly because of the low kickback design.

FREQUENT USERS - Chain with Reliable Performance



IDENTIFIED BY GRAY PACKAGING

AdvanceCut™

Perfect for homeowners cutting trees on their property and for tree-cutting professionals who only need to occasionally cut wood. User-friendly because of the low kickback design.

PROFESSIONAL USERS - Chain for High-Performance Saws



IDENTIFIED BY BLACK PACKAGING

SpeedCut™

Faster, cutting performance for wood-cutting professionals and experienced firewood cutters alike. Narrow kerf system requires less power to cut through high volumes of wood quickly and easily.

VersaCut™

Designed for tree-cutting professionals who require high performance from their saw chain. Uses cutters designed for maximum durability and versatility.

ControlCut™

Ideal for property owners & professionals looking for additional control, delivering a smooth cut every single time. Easy to maintain, with a forgiving sharpening profile.

PowerCut™

The ultimate saw chain for loggers and skilled forest workers. Full chisel cutters power through timber with speed, efficiency, and precision.

DuraCut™

Made for woodcutters working in abrasive and tough environments. Advanced plating process with extra layers of chrome. Cut up to three times longer than conventional saw chain.

RipCut™

Created specifically for chain-type sawmills. Produces smooth ripping cuts with supreme efficiency to make precise boards and planks.

Saw Chain Loop and Guide Bar packaging

Package Materials and Durability

You'll notice a real improvement in our packaging; we've used higher quality materials and superior construction for better durability.

Clear Communication and User-Friendly Layout

You can identify and choose the right product through the following:

1. Product family
2. Part number
3. OEM chain saw fit up
4. Product information
5. Window for product visibility
6. Bar motor mount exposed for easy identification
7. Areas to write product information



front

back



generic loop box front



front



back

NEW

SPEEDCUT™ NANO

CUTTING SYSTEM  +  + 


Designed for battery-powered and compact light-weight petrol chainsaws (20-38 cc).

80TXL Saw Chain

New patented-shape Micro-Chisel chain designed to maximize cutting speed and empowering compact saws : Faster speed, Smooth cut and unstoppable performance. Ideal for arborists and pruners.

- Longer Run Time
- Smooth Cuts
- Increased Speed
- Unstoppable Performance

BEST



80TXL Guide Bar

Exclusive guide bar for New SpeedCut™ Nano cutting system (bar, chain, sprocket): increased speed, smoother cut, longer run time, unstoppable performance.


Engineered for professional arborist and top handle use.

Power through the day with a guide bar engineered specifically for 80TXL saw chain.

- High-strength body
- Performance-driven nose components



Oregon® is a registered trademark of Oregon Tool Inc.
All other marks are the property of their respective owners.

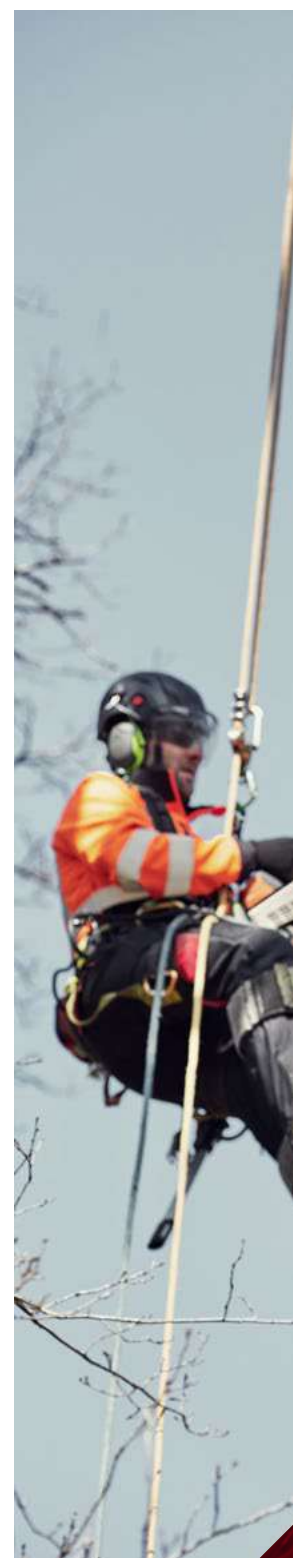


OREGON®

SHARPER BY NATURE™



CONVERSION KITS



80TXL must be used together with the corresponding guide bar and sprocket and is not compatible with other existing cutting systems. SpeedCut Nano conversion kits include a sprocket, a guide bar and a chain loop.

Stihl®	10" (25cm)	12" (30cm)	14" (35cm)	16" (40cm)
MS 150				
MS 150T	635137	614383	614382	
MS 151				
MS 151T				
MSA 161T	637260	637261	637262	637263
MS 170				
MS 171		637259	614384	614385
MS 180				
MS 181				
MS 192				
MS 192T				
MS 193				
MS 193T				
MS 194	614379	614380	614377	614381
MS 194T				
MS 200				
MS 200T				
MS 201				
MS 201T				

Husqvarna®

T 435	614388	614391	614395	614398
T 525	637264	637265	637266	637267
T536Li XP 536Li XP	614389	614392	614396	614399
T540 XP T540 XP II	614387	614390	614393	614397

Echo®

CCS-58V	637231	637232	637233	637234
CS-2511TES	637235	637236	637237	637238
CS-303T	637255	637256	637257	637258



NEW

24AP

Made for precision pruning when the quality and smoothness of the cut matter most, 24AP is a 1/4" pitch low-profile 1,1mm gauge chain designed for use with one-handed pruners, pole-saws and small petrol or battery powered chainsaws.

24AP saw chain is ideal for precise pruning of small diameter branches.

Low profile, ensuring low vibration and less kickback without compromising cutting performance



The 24AP chain is not for sale, resale, or use in the United States or Germany.

NEW 24AP **1/4"** LOW PROFILE **SMOOTH AND PRECISE**

GET SMOOTHER AND CLEANER CUTS WITH THE NEW 24AP LOW-PROFILE, NARROW-KERF CHAIN.

MAXIMISE YOUR EFFICIENCY COMPARED TO STANDARD 1/4" PITCH CHAINS.

+ EFFICIENT

The 24AP chain provides fast and efficient cutting of small diameter applications. it's low-profile, narrow kerf design extends run-time over standard profile 1/4" pitch or 3/8 low-profile chains.

+ SMOOTH

24AP's semi-chisel cutters provide a smooth cut with minimal feed-load, with little effort, which reduces fatigue so that the user can do the work with ease.

+ PRECISE

The precision semi-chisel cutters of 24AP quickly engage in the cut and provide a clean and smooth cutting action, even with smaller diameter wood.

Semi-chisel cutter has a rounded cutting surface that allows chain to stay sharper, longer, without sacrificing speed

1/4"
LOW PROFILE



24 : 1,1mm

3,2mm

30°

55°

0,50mm

28

56

57

64

65

72

24AP028E

24AP056E

24AP057E

24AP064E

24AP065E

24AP072E

POWERCUT™ 70-SERIES EXL

The evolution of 3/8" professional chainsaw chain

The 70-series EXL chain provides superior cutting performance to increase work efficiency and minimise fatigue.

BEST

FASTER


Reshaped cutter optimised for maximum performance, right out of the box

LESS EFFORT

Increased self-feeding to reduce effort during the cut

POWERFUL

Efficient transfer of every horsepower into the cut, maximising the chainsaw's power

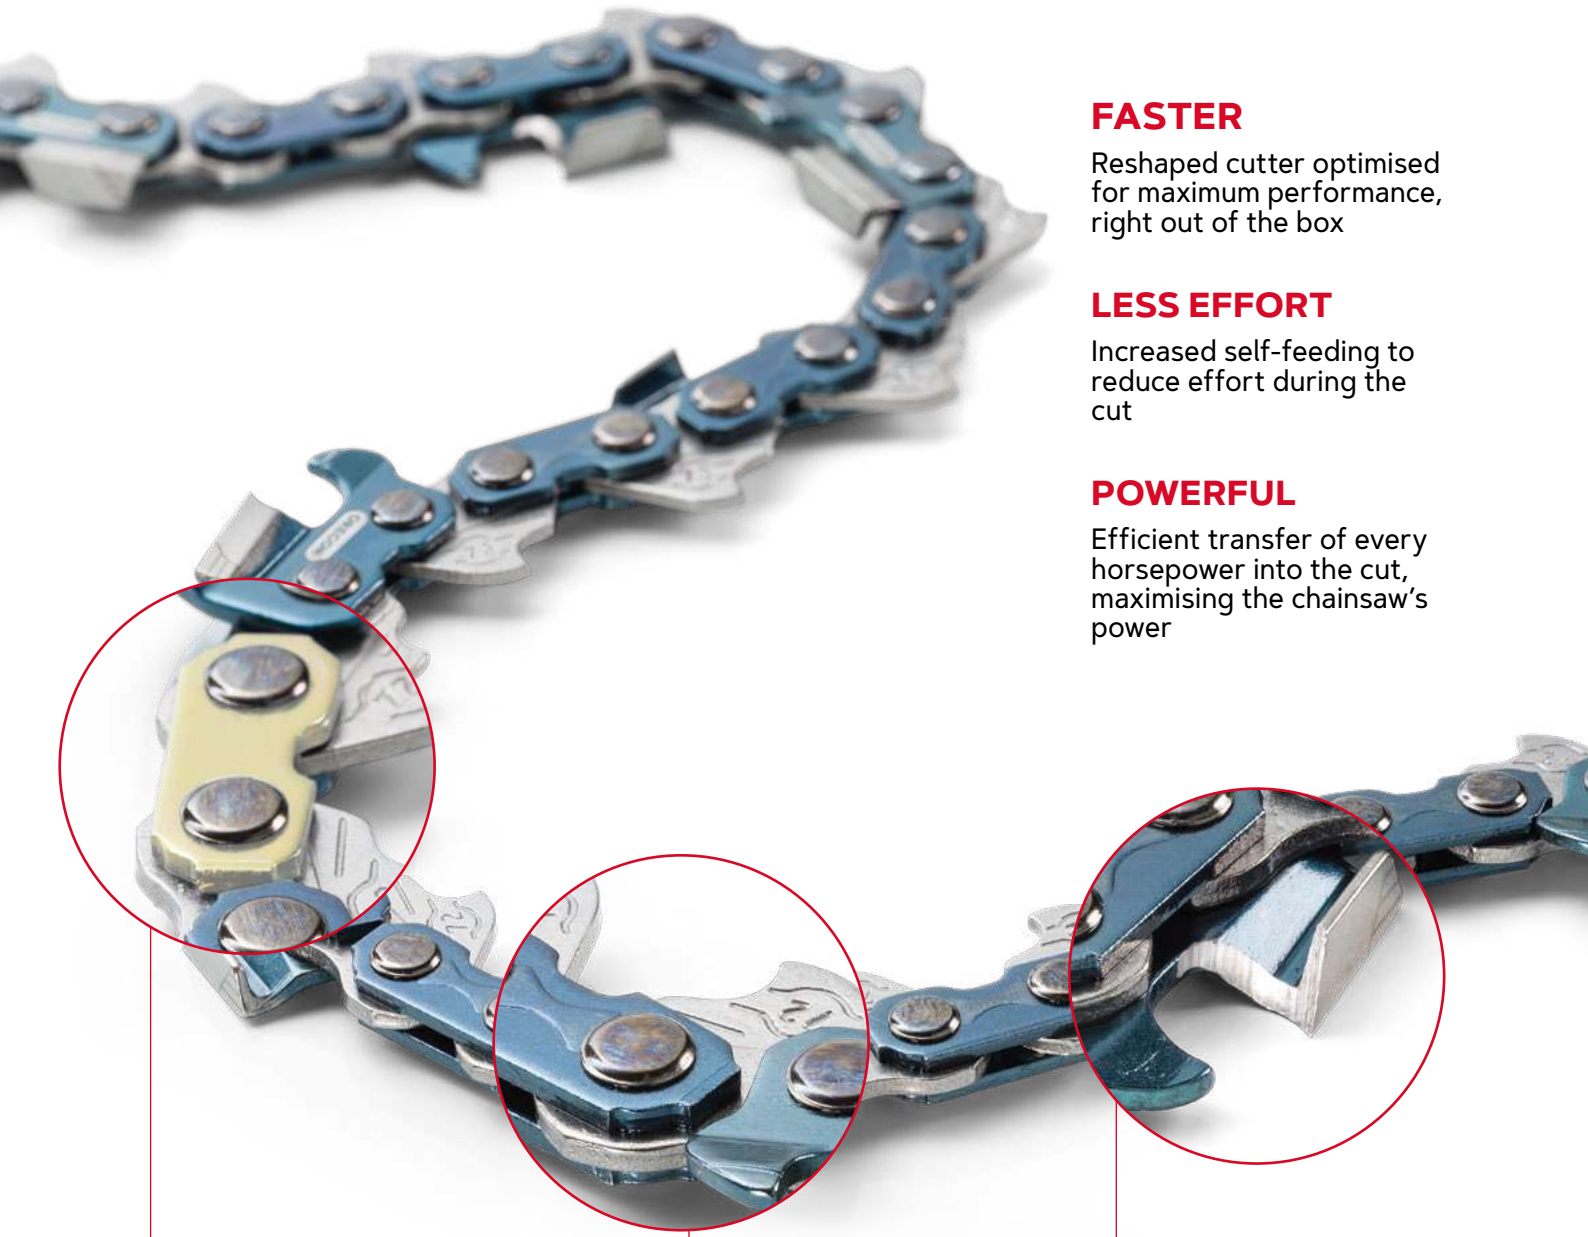

Gold Loop start/stop Indicator, enhanced filing indicators (side/top/end-of-life) and easier to file geometry.

LubriTec™ oiling system. Less friction, longer life.

Reshaped Full-Chisel cutters. Cleaner, Sharper, more durable cutting edge. Optimised ramped depth gauge design.

Bumperless, low kickback, low vibration.



THE WORLD'S SHARPEST, CLEANEST CUTTING EDGE FROM OREGON'S PROPRIETARY GRIND PROCESS

Multi-axis grind technology.
No need to file out-of-box.

Dry-touch oiled from factory. Less mess.

Reduces the force needed by the operator by
up to 14%

Engineered to utilise the power of today's high
output professional saw.

Skip sequence available on request

A sharper, reshaped cutter provides faster
speed and requires less effort in the cut



Saw Size

50-100 cc



Bar Lengths

40-90 cm (16-36")



Full Chisel



LubriTec™
OILING SYSTEM



		Loop Sizes Available 												
72EXL	.050"	1.3 mm										100ft		
73EXL	.058"	1.5 mm	56	60	64		68	72		84	92	100ft		
75EXL	.063"	1.6 mm	56	60		66		72	76	84		98	114	100ft

OREGON	U	Loop Sizes Available										III
73EXJ	.058"	1.5 mm										100ft
75EXJ	.063"	1.6 mm										100ft

POWERSHARP®

PRECISION SAW CHAIN SHARPENING SYSTEM

Occasional saw chain users sometimes spend too much time using hand files to sharpen dull chain. Fumbling an inexact sharpening is a thing of the past with PowerSharp. PowerSharp chain goes from dull to sharp in as little as 3 or 4 seconds.

PowerSharp is also ideal for professional users who want greater productivity on the job. Professionals get precise and knife-sharp edges quickly and easily – every time.



PowerSharp® is an easy-to-use, precision sharpening system that gives chain saw users the power to sharpen their chain in a matter of seconds with a simple-to-use attachment.

FAST

- Goes from dull to sharp in as little as 3 or 4 seconds (Up to 10 on electric models).

EASY

- Only three steps to faster, easier cutting.

PORTABLE

- Bar-mount sharpener is lightweight, durable, and highly visible.

PRECISE

- Exact alignment insures perfect cutter geometry.

TOUGH

- Durable and hardworking as other Oregon 3/8" pitch, low-profile chain.

OREGON®

SHARPER BY NATURE™



ATTACH

When the chain dulls from normal use simply attach the bar-mount sharpener to the PowerSharp® guide bar. Twin guide holes in the tip of the guide bar helps insure a perfect alignment every time the sharpener is used.



SHARPEN

Press the tip of the sharpener to a solid surface for 3 or 4 seconds at full throttle (Up to 10 seconds on Electric saws).



CUT

And it's back to the job, working faster with less effort.



OREGON®


SAW CHAINS






Saw Chain Terminology

PARTS OF SAW CHAIN

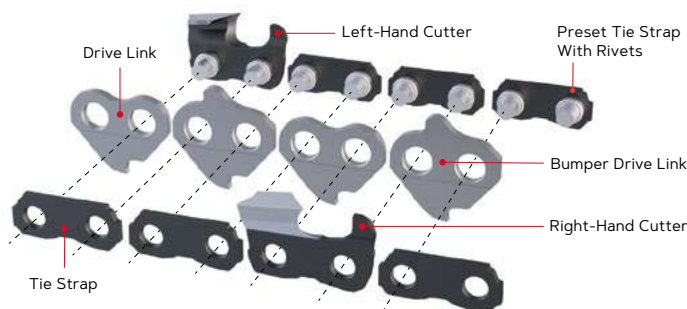

PARTS OF A CUTTER



PARTS OF A RIVET



LOW VIBRATION


Less vibration equals more comfort. We wanted to lessen vibration-induced white finger (VWF), so we created a small space between the saw chain and the guide bar. A lot of the energy gets dissipated by the saw chain, acting as a shock absorber. It never reaches the guide bar, the saw – or most important – the operator.

Our low vibration design reduces vibrations by 25% or more.



FILING INDICATORS

Your sharpening made easier and more accurate. Special filing marks show the best top-plate angle. Lines make it easier for filing the correct top-plate angle and help maintain equal cutter lengths. Filing indicators show you when cutters have reached the end of their life. Cutters should not be sharpened beyond the line.




BLUED COMPONENTS

Our Blued Components give you high-quality resistance to corrosion with the presence of protective oil. A precise and controlled tempering process results in a blue surface, designating our best-in-class saw chain.




CHROME-PLATED CUTTERS

Your chain stays sharper, longer. Oregon electroplates a layer of industrial hard chrome to all our saw chain cutters. Chrome delivers a harder surface and better wear resistance. So you spend more time cutting and less time filing or grinding the chain.



HARDENED RIVETS

For a longer working saw chain, Oregon induction hardens and quenches all saw chain rivets, delivering a high quality, load-bearing surface that resists wear and improves strength. Less wear and chain stretch means fewer chain tension adjustments.



Chain Cutter Sequence Terminology

STANDARD



SKIP SEQUENCE



Consumer users of chainsaws will probably never need to use a skip sequence chain. However, professional or commercial chainsaw operators who use their saws frequently and who use longer bars may prefer a skip chain for these reasons:


- Fewer cutters to sharpen makes sharpening faster
- Greater clearance for better chip flow – the larger the wood being cut and the longer the bar used, the more important good chip flow becomes

LubriTec™ OILING SYSTEM

You want tools to work smarter and last longer. We designed LubriTec to deliver the best possible lubrication for your saw chain. Keeping lubrication where it's needed most means a longer lasting saw chain and guide bar and less down time. Here's how it works:


LUBRITEC FOR THE CHAIN

- Lubricant is held inside LubriTec reservoirs.
- Oil flows freely into and around the saw chain parts and the guide bar. Oil is held in the high-friction zone where the saw chain and guide bar groove walls make contact.
- The presence of lubricant lowers friction during the start-up period before the saw's oiling system reaches its peak function.
- LubriTec strengthens the saw chain tie straps and reduces their tendency to flex during operation, making a more stable and durable saw chain.

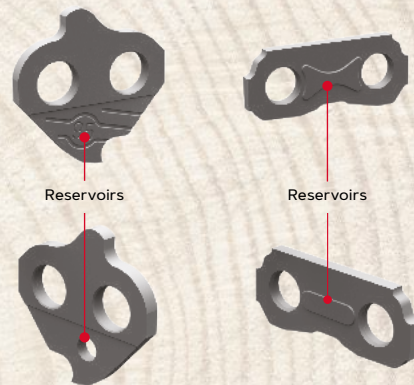

LUBRITEC FOR THE GUIDE BAR

- Our LubriTec guide bar dam is cleverly designed to keep lubricant where it's needed most. It looks like a small barrier and is found in the bottom of the guide bar's groove, just behind the oil hole. It both increases available oil and reduces oil hole plugging. Resulting in better overall lubrication.
- The LubriTec angled oil hole virtually eliminates guide bar oil hole plugging. The oil hole slopes up toward the top of the guide bar and forward toward the nose. It's approximately 40% smaller in diameter than a standard hole, increasing velocity as oil enters the guide bar. It also helps clear sawdust and debris away from the hole during operation.

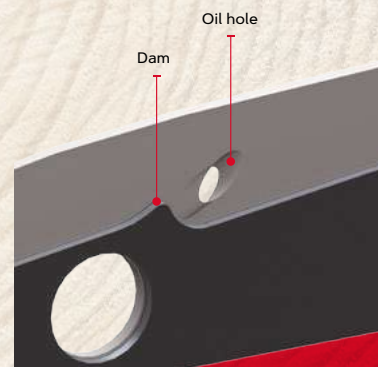

Chains part numbers and families overview



80 TXL 064 E

					
CHAIN PITCH AND GAUGE		CHAIN FAMILY		LENGTH number of driveline links	
1/4" LOW PROFILE	24	.043" 1,1mm	ACL VersaCut™	...	...
	25	.050" 1,3mm	AP ControlCut™	034	34
1/4"	25	.050" 1,3mm	AP ControlCut™	040	40
	25	.050" 1,3mm	AP ControlCut™	042	42
.325" LOW PROFILE	80	.043" 1,1mm	BPX ControlCut™	044	44
	80	.043" 1,1mm	BPX ControlCut™	045	45
3/8" LOW PROFILE	90	.043" 1,1mm	DPX/DX VersaCut™	046	46
	90	.043" 1,1mm	DPX/DX VersaCut™	047	47
3/8"	91	.050" 1,3mm	EXL PowerCut™	050	50
	91	.050" 1,3mm	EXL PowerCut™	051	51
3/8"	91	.050" 1,3mm	EXJ PowerCut™	052	52
	91	.050" 1,3mm	EXJ PowerCut™	053	53
3/8"	95	.050" 1,3mm	H Harvester	055	55
	95	.050" 1,3mm	H Harvester	056	56
.325"	20	.050" 1,3mm	HX Harvester	057	57
	20	.050" 1,3mm	HX Harvester	058	58
.325"	21	.058" 1,5mm	L PowerCut™	059	59
	21	.058" 1,5mm	L PowerCut™	060	60
.325"	22	.063" 1,6mm	LGX PowerCut™	062	62
	22	.063" 1,6mm	LGX PowerCut™	063	63
3/8"	72	.050" 1,3mm	LPX PowerCut™	064	64
	72	.050" 1,3mm	LPX PowerCut™	065	65
3/8"	73	.058" 1,5mm	P Standard	066	66
	73	.058" 1,5mm	P Standard	067	67
3/8"	75	.063" 1,6mm	PS PowerSharp™	068	68
	75	.063" 1,6mm	PS PowerSharp™	072	72
3/8"	75	.063" 1,6mm	PX AdvanceCut™	074	74
	75	.063" 1,6mm	PX AdvanceCut™	076	76
3/8"	27	.063" 1,6mm	R RipCut™	078	78
	27	.063" 1,6mm	R RipCut™	080	80
3/8"	59	.063" 1,6mm	RD RipCut™	081	81
	59	.063" 1,6mm	RD RipCut™	084	84
.404"	18	.080" 2,0mm	RX RipCut™	091	91
	18	.080" 2,0mm	RX RipCut™	092	92
.404"	19	.080" 2,0mm	TXL SpeedCut™ SpeedCut™ Nano	098	98
	19	.080" 2,0mm	TXL SpeedCut™ SpeedCut™ Nano	102	102
3/4"	11	.122" 3,1mm	VXL VersaCut™	114	114
	11	.122" 3,1mm	VXL VersaCut™	115	115
3/4"	11	.122" 3,1mm	X VersaCut™	135	135
	11	.122" 3,1mm	X VersaCut™	100	100 ft



E Loops

R 100 ft Reels





7

narrow
kerfi
Page

BETTER

1/4"

LOW PROFILE

NEW

AdvanceCut™ 24AP

Semi-chisel

.043"

1,1mm

≤ 38 cc

20

1/4"

ControlCut™ 25AP

Micro Chisel®

.050"

1,3mm

≤ 38 cc

20

.325"

LOW PROFILE

SpeedCut™ Nano 80TXL

Micro Chisel®

.043"

1,1mm

20 → 38 cc

20

BETTER

AdvanceCut™ 90PX

Chamfer Chisel™

.043"

1,1mm



≤ 42 cc

22

GOOD

Standard 91P

Chamfer Chisel™

.050"

1,3mm

≤ 42 cc

22

BETTER

AdvanceCut™ 91PX

Chamfer Chisel™

.050"

1,3mm

≤ 42 cc

22

3/8"

LOW PROFILE

VersaCut™ 91VXL

Semi-chisel

.050"

1,3mm

≤ 42 cc

22

DuraCut™ M91VXL

Semi-chisel

.050"

1,3mm

≤ 42 cc

22

PowerSharp™ 91PS

Powersharp

.050"

1,3mm

≤ 42 cc

24

RipCut™ 91R

Chamfer Chisel™

.050"

1,3mm

Ripping cuts only

24

SpeedCut™ 95TXL

Micro Chisel®

.050"

1,3mm



38 → 55 cc

25

DuraCut™ M95VPX

Micro Chisel®

.050"

1,3mm



38 → 55 cc

25

ControlCut™ 20BPX

Micro Chisel®

.050"

1,3mm

38 → 62 cc

26

ControlCut™ 21BPX

Micro Chisel®

.058"

1,5mm

38 → 62 cc

26

ControlCut™ 22BPX

Micro Chisel®

.063"

1,6mm

38 → 62 cc

26

PowerCut™ 20LPX

Full chisel

.050"

1,3mm

38 → 62 cc

27

PowerCut™ 21LPX

Full chisel

.058"

1,5mm

38 → 62 cc

27

PowerCut™ 22LPX

Full chisel

.063"

1,6mm

38 → 62 cc

27

DuraCut™ M21LPX

Full chisel

.058"

1,5mm

38 → 62 cc

27

PowerCut™ 20LGX

Full chisel

.050"

1,3mm

38 → 62 cc

28

PowerCut™ 21LGX

Full chisel

.058"

1,5mm

38 → 62 cc

28

PowerCut™ 22LGX

Full chisel

.063"

1,6mm

38 → 62 cc

28

.325"

VersaCut™ 72DPX/DX

Semi-chisel

.050"

1,3mm

50 → 100 cc

29

VersaCut™ 73DPX/DX

Semi-chisel

.058"

1,5mm

50 → 100 cc

29

VersaCut™ 75DPX/DX

Semi-chisel

.063"

1,6mm

50 → 100 cc

29

PowerCut™ 72LPX

Full chisel

.050"

1,3mm

50 → 100 cc

30

PowerCut™ 73LPX

Full chisel

.058"

1,5mm

50 → 100 cc

30

PowerCut™ 75LPX

Full chisel

.063"

1,6mm

50 → 100 cc

30

DuraCut™ M73LPX

Full chisel

.058"

1,5mm

50 → 100 cc

30

DuraCut™ M75LPX

Full chisel

.063"

1,6mm

50 → 100 cc

30

3/8"

PowerCut™ 72EXL

Full chisel

.050"

1,3mm

50 → 100 cc

31

PowerCut™ 73EXL

Full chisel

.058"

1,5mm

50 → 100 cc

31

PowerCut™ 75EXL

Full chisel

.063"

1,6mm

50 → 100 cc

31

Skip

PowerCut™ 73EXJ

Full chisel

.058"

1,5mm

50 → 100 cc

31

Skip

PowerCut™ 75EXJ

Full chisel

.063"

1,6mm

50 → 100 cc

31

RipCut™ 72RD

Semi-chisel

.050"

1,3mm

Ripping cuts only

32

RipCut™ 73RD

Semi-chisel

.058"

1,5mm

Ripping cuts only

32

RipCut™ 75RD

Semi-chisel

.063"

1,6mm

Ripping cuts only

32

VersaCut™ 27X

Micro Chisel®

.063"

1,6mm

≥ 65 cc

32

VersaCut™ 59ACL

Chipper

.063"

1,6mm

≥ 65 cc

33

PowerCut™ 59L

Full chisel

.063"

1,6mm

≥ 65 cc

33

RipCut™ 27R

Micro Chisel®

.063"

1,6mm

Ripping cuts only

33

Skip

RipCut™ 27RX

Micro Chisel®

.063"

1,6mm

Ripping cuts only

33

.404"

Harvester 18HX

Micro Chisel®

.080"

2,0mm

Harvester 19HX

Chamfer Chisel™

.080"

2,0mm

3/4"

Harvester 11H

Semi-chisel

.122"

3,1mm

Harvester
catalogue

BEST


NEW AdvanceCut™ 24AP



 ≤ 38 cc

Made for precision pruning when the quality and smoothness of the cut matter most, 24AP is a 1/4" pitch low-profile 1,1mm gauge chain designed for use with one-handed pruners, pole-saws and small petrol or battery powered chainsaws.

24AP Semi Chisel saw chain is ideal for precise pruning of small diameter branches.



28  56  57  64  65  72 

24AP028E 24AP056E 24AP057E 24AP064E 24AP065E 24AP072E

The 24AP chain is not for sale, resale, or use in the united states or Germany.

ControlCut™ 25AP



 ≤ 38 cc

Get your smallest jobs done just right. 25AP is light-weight, smooth chain, ideal for pruning — our Micro Chisel® cutters have small-radius working corners for excellent performance, and they are easy to maintain.

The 25AP is small and light-weight, making it easy to use and maneuver.



42  58  60  2392 


25AP042E 25AP058E 25AP060E 25AP100R

SpeedCut™ Nano 80TXL



 20 → 38 cc

New patented-shape Micro Chisel® chain designed to maximize cutting speed and empowering compact saws: Faster speed, Smooth cut and unstoppable performance. Ideal for arborists and pruners.



26  32  38  46  51  59  64  70 

80TXL026E 80TXL032E 80TXL038E 80TXL046E 80TXL051E 80TXL059E 80TXL064E 80TXL070E

Stihl	☆	10" (25cm)		12" (30cm)		14" (35cm)		16" (40cm)		
MS 150 / MS 150T MS 151 / MS 151T	610727N	104TXLNA074	80TXL046E	46	124TXLNA074	80TXL051E	51	144TXLNA074	80TXL059E	59
MSA 161T	625333	104TXLNA074	80TXL046E	46	124TXLNA074	80TXL051E	51	144TXLNA074	80TXL059E	59
MS 170 / MS 171, MS 180 / MS 181	610726N				124TXLNA074	80TXL051E	51	144TXLNA074	80TXL059E	59
MS 192 / MS 192T, MS 193 / MS 193T, MS 194 / MS 194T, MS 200 / MS 200T, MS 201 / MS 201T	610725N	104TXLNA074	80TXL046E	46	124TXLNA074	80TXL051E	51	144TXLNA074	80TXL059E	59
								164TXLNA074	80TXL064E	64

Husqvarna		10" (25cm) 		12" (30cm) 		14" (35cm) 		16" (40cm) 					
T435	610729N												
T525	627943												
535i XP, T535i XP 536Li XP, T536Li XP, 540i XP, T540i XP	610730N	104TXLNA095	80TXL046E	46	124TXLNA095	80TXL051E	51	144TXLNA095	80TXL059E	59	164TXLNA095	80TXL064E	64
T540 XP, T540 XP II	610728N												

Echo		10" (25cm) 		12" (30cm) 		14" (35cm) 		16" (40cm) 					
CCS-58V	629320												
CS-251ITES	629318	104TXLNA041	80TXL046E	46	124TXLNA041	80TXL051E	51	144TXLNA041	80TXL059E	59	164TXLNA041	80TXL064E	64
CS-303T	629322												

CONVERSION KITS



80TXL must be used together with the corresponding guide bar and sprocket and is not compatible with other existing cutting systems. SpeedCut Nano conversion kits include a sprocket, a guide bar and a chain loop.

Stihl®	10" (25cm) 	12" (30cm) 	14" (35cm) 	16" (40cm) 
MS 150 / MS 150T MS 151 / MS 151T	635137	614383	614382	
MSA 161T	637260	637261	637262	637263
MS 170, MS 171 MS 180, MS 181		637259	614384	614385
MS 192 / MS 192T MS 193 / MS 193T MS 194 / MS 194T MS 200 / MS 200T MS 201 / MS 201T	614379	614380	614377	614381

Husqvarna®	10" (25cm) 	12" (30cm) 	14" (35cm) 	16" (40cm) 
T 435	614388	614391	614395	614398
T 525	637264	637265	637266	637267
535i XP / T535i XP, 536Li XP / T536LiXP, 540i XP / T540i XP	614389	614392	614396	614399
540, T540 XP, T540 XP II	614387	614390	614393	614397

Echo	10" (25cm) 	12" (30cm) 	14" (35cm) 	16" (40cm) 
CCS-58V	637231	637232	637233	637234
CS-251ITES	637235	637236	637237	637238
CS-303T	637255	637256	637257	637258



AdvanceCut™ 90PX

 ≤ 42 cc

Maintain your trees with ease. 90PX offers higher chain efficiency, ideal for small, low powered saws great for landscapers and homeowners. The narrow .043" gauge reduces the weight of the bar and chain by roughly 15%. Low-vibration, low kickback Chamfer Chisel™ cutters' twin cutting corners offer outstanding performance. They are durable, easy to maintain and forgiving, comparable to round-cornered chains. Bumper drive link paired with depth gauge design, offers reduced kickback with strong performance.



3/8" LOW PROFILE	7	90 : 1,1mm	Narrow Kerf	LubriTec™ OILING SYSTEM	4,5mm	30°	55°	0,64mm
33 ♡	34 ♡	40 ♡	44 ♡	45 ♡	46 ♡	50 ♡		
90PX033E	90PX034E	90PX040E	90PX044E	90PX045E	90PX046E	90PX050E		
52 ♡	56 ♡	57 ♡	1637 ♡					
90PX052E	90PX056E	90PX057E	90PX100R					

91P

 ≤ 42 cc

91P is for homeowners and occasional users who want a low kickback saw chain. The Chamfer Chisel cutters' twin cutting corners offer outstanding performance. Bumper drive link paired with depth gauge design, offers reduced kickback with strong performance.



3/8" LOW PROFILE	7	91 : 1,3mm	4,0mm	30°	55°	0,64mm
40 ♡	44 ♡	45 ♡	50 ♡	52 ♡	53 ♡	55 ♡
91P040E	91P044E	91P045E	91P050E	91P052E	91P053E	91P055E
56 ♡	57 ♡	62 ♡	1637 ♡			
91P056E	91P057E	91P062E	91P100R			

AdvanceCut™ 91PX

 ≤ 42 cc

91PX is for homeowners and occasional users who want a low-vibration and low kickback saw chain. The Chamfer Chisel cutters' twin cutting corners offer outstanding performance. They are durable, easy to maintain and forgiving, comparable to round-cornered chains. Bumper drive link paired with depth gauge design, offers reduced kickback with strong performance. 91PX incorporates LubriTec oiling features for a longer lasting saw chain and less down time.



3/8" LOW PROFILE	7	91: 1,3 mm	LubriTec™ OILING SYSTEM	4,0 mm	30°	55°	0,64 mm
33 ♡		40 ♡		44 ♡		45 ♡	
91PX033E		91PX040E		91PX044E		91PX045E	
53 ♡		55 ♡		56 ♡		57 ♡	
91PX053E		91PX055E		91PX056E		91PX057E	
						47 ♡	
						50 ♡	
						91PX047E	
						91PX050E	
						91PX052E	
						1637 ♡	
						91PX100R	

VersaCut™ 91VXL

 ≤ 42 cc

91VXL is a high-performance, Low Profile chain. Ideal for professional arborists and orchardists who use light-weight chain saws. Low vibration, semi-chisel cutters provide an aggressive cutting edge with a forgiving sharpening profile and good stay-sharp. Cutter top-plates are 33% longer than standard 91 cutters.



3/8" LOW PROFILE	7	91: 1,3 mm	LubriTec™ OILING SYSTEM	4,0 mm	30°	55°	0,64 mm
40 ♡		44 ♡		45 ♡		47 ♡	
91VXL040E		91VXL044E		91VXL045E		91VXL047E	
55 ♡		56 ♡		57 ♡		62 ♡	
91VXL055E		91VXL056E		91VXL057E		91VXL062E	
						50 ♡	
						52 ♡	
						91VXL050E	
						91VXL052E	
						91VXL053E	
						1637 ♡	
						91VXL100R	

DuraCut™ M91VXL

 ≤ 42 cc

Work longer in dirty conditions with this more durable version of our aggressive 91VXL chain; keeps cutting up to 3 times longer vs standard 3/8" LP chains. Maintain with standard maintenance tools. (Formerly named MultiCut™)



3/8" LOW PROFILE	7	91: 1,3 mm	LubriTec™ OILING SYSTEM	4,0 mm	30°	55°	0,64 mm
44 ♡		50 ♡		52 ♡		55 ♡	
M91VXL044E		M91VXL050E		M91VXL052E		M91VXL055E	
						56 ♡	
						409 ♡	
						M91VXL056E	
						M91VXL025R	

PowerSharp™ 91PS

 ≤ 42 cc



Sharpen the 91PS chain in a flash. Go from dull to sharp in just three seconds with this easy-to-use, precision sharpening system. A simple attachment lets you sharpen your chain in three easy steps. The portable bar-mount sharpener is light-weight and durable. Get precise sharpening through exact alignment between cutter and honing surface, for perfect angles and knife-sharp edges. Stays sharp three times longer than 91PX saw chain.

B

3/8"
LOW PROFILE



91: 1,3mm

3 sec



PowerSharp®

LubriTec™
OILING SYSTEM

50 

PS50E

52 

PS52E

55 

PS55E

56 

PS56E

62 

PS62E

Note : Onboard PowerSharp replacement chains for CS1500 are in the Oregon Power Equipment section.



A : see PowerSharp Bar kits on page 43

RipCut™ 91R



91R is a chain intended for ripping in mobile sawmills. The cutting angle of the chain at 5° is adapted for sawing longitudinal fibers.

RipCut's precise ripping cuts give you a smooth surface every time you cut parallel to the wood grain. RipCut isn't recommended for hand-held use, but it suits experienced millwrights just fine.

3/8"
LOW PROFILE



91: 1,3mm

4,0 mm



0,64 mm

1637 

91R100R

SpeedCut™ 95TXL



38 → 55 cc

Work faster, sharper, easier, with a more efficient chain. Ideal for arborists and property owners who want top performance. 95TXL is for saws up to 55 cc. SpeedCut™ 95TXL narrow kerf cutting systems are more efficient, needing less power from the saw than standard cutting systems. Low-vibration, Micro Chisel cutters have small-radius working corners for excellent performance and easy maintenance. Get a faster, easier cut with a reshaped cutting surface. A sharper, more durable cutting edge from a new precision grind and optimized cutting angle. Always use SpeedCut narrow kerf chain in combination with Speedcut, AdvanceCut or AdvanceCut HD bars.



.325"	7	95 : 1,3 mm		LubriTec™ OILING SYSTEM	4,8 mm	30°	55°	0,64 mm
56	60	62	64	66	67	72		
95TXL056E	95TXL060E	95TXL062E	95TXL064E	95TXL066E	95TXL067E	95TXL072E		
74	78	1848						
95TXL074E	95TXL078E	95TXL100R						

DuraCut™ M95VPX



38 → 55 cc

Cut effectively in dirty and abrasive conditions with this more durable version of our high-performing .325" pitch "Narrow Kerf" 95VPX; keeps cutting up to 3 times longer vs standard .325" chains. (Formerly named MultiCut™) Maintenance with standard maintenance tools.



.325"	7	95 : 1,3 mm		LubriTec™ OILING SYSTEM	4,8 mm	30°	55°	0,64 mm
56	64	72	462					
M95VPX056E	M95VPX064E	M95VPX072E	M95VPX025R					

ControlCut™ 20-Series BPX

 38 → 62 cc

An ideal choice for occasional users like property owners and commercial cutters. The low-vibration, Micro Chisel cutters have small-radius working corners for excellent performance and easy maintenance. Low kickback design.



.325"	7	20 : 1,3 mm	LubriTec™ OILING SYSTEM	4,8 mm	30°	55°	0,64 mm
64 ♡	66 ♡	72 ♡	1848 ♡				
20BPX064E	20BPX066E	20BPX072E	20BPX100R				

.325"	7	21 : 1,5 mm	LubriTec™ OILING SYSTEM	4,8 mm	30°	55°	0,64 mm
56 ♡	64 ♡	66 ♡	68 ♡	72 ♡	76 ♡	78 ♡	
21BPX056E	21BPX064E	21BPX066E	21BPX068E	21BPX072E	21BPX076E	21BPX078E	
	1848 ♡						
	21BPX100R						

.325"	7	22 : 1,6 mm	LubriTec™ OILING SYSTEM	4,8 mm	30°	55°	0,64 mm
62 ♡	67 ♡	68 ♡	74 ♡	1848 ♡			
22BPX062E	22BPX067E	22BPX068E	22BPX074E	22BPX100R			

PowerCut™ 20-Series LPX

 38 → 62 cc

An ideal chain for professional woodcutters who use .325" pitch saws. Low-vibration, full chisel cutters offer top performance. Offset depth gauges prevent cutters from driving into the sidewall of the cut, offering a smoother cut.



.325"	7	20 : 1,3 mm	LubriTec™ OILING SYSTEM	4,8 mm	25°	55°	0,64 mm
56 ♀	64 ♀	66 ♀	72 ♀	1848 ♀			
20LPX056E	20LPX064E	20LPX066E	20LPX072E	20LPX100R			

.325"	7	21 : 1,5 mm	LubriTec™ OILING SYSTEM	4,8 mm	25°	55°	0,64 mm
56 ♀	64 ♀	66 ♀	72 ♀	76 ♀	78 ♀	1848 ♀	
21LPX056E	21LPX064E	21LPX066E	21LPX072E	21LPX076E	21LPX078E	21LPX100R	

.325"	7	22 : 1,6 mm	LubriTec™ OILING SYSTEM	4,8 mm	25°	55°	0,64 mm
56 ♀	62 ♀	67 ♀	68 ♀	74 ♀	1848 ♀		
22LPX056E	22LPX062E	22LPX067E	22LPX068E	22LPX074E	22LPX100R		

DuraCut™ M21 LPX

 38 → 62 cc

Cut effectively in dirty and abrasive conditions with this more durable version of our high-performing .325" pitch LPX chain; keeps cutting up times longer vs standard .325" chains. (Formerly named MultiCut™.) Maintain with standard maintenance tools.



.325"	7	21 : 1,5 mm	LubriTec™ OILING SYSTEM	4,8 mm	25°	55°	0,64 mm
64 ♀	67 ♀	462 ♀					
M21LPX064E	M21LPX072E	M21LPX025R					

PowerCut™ 20-Series LGX

 38 → 62 cc

The 20-Series LGX has been engineered to harness the power of today's high-performance saws. Blued, full-chisel cutters and advanced LubriTec™ oiling features mean this chain is ready to work as hard as you are.



.325"	7	20 : 1,3 mm	LubriTec™ OILING SYSTEM	4,8 mm	25°	55°	0,64 mm
-------	---	-------------	----------------------------	--------	-----	-----	---------

64 ♡	72 ♡	1848 ♡
20LGX064E	20LGX072E	20LGX100R

.325"	7	21 : 1,5 mm	LubriTec™ OILING SYSTEM	4,8 mm	25°	55°	0,64 mm
-------	---	-------------	----------------------------	--------	-----	-----	---------

64 ♡	66 ♡	68 ♡	80 ♡	1848 ♡
21LGX064E	21LGX066E	21LGX068E	21LGX080E	21LGX100R

.325"	7	22 : 1,6 mm	LubriTec™ OILING SYSTEM	4,8 mm	25°	55°	0,64 mm
-------	---	-------------	----------------------------	--------	-----	-----	---------

62 ♡	67 ♡	68 ♡	74 ♡	1848 ♡
22LGX062E	22LGX067E	22LGX068E	22LGX074E	22LGX100R

VersaCut™ 70-Series DPX/DX

 50 → 100 cc

An ideal choice for occasional and commercial use. Easy to maintain. Low-vibration, semi-chisel cutter designs work fast. This design is typically more tolerant of sharpening errors than chisel cutters.

Kickback Reducing Features on DPX Chains.

DX version (non illustrated) does not include bumper drive links. All its drive links are standard bumperless.



3/8"		 72 : 1,3 mm		 5,5 mm	 30°	 55°	 0,64 mm
-------------	---	---	---	--	--	---	---

1637 

72DPX100R

3/8"		 73 : 1,5 mm		 5,5 mm	 30°	 55°	 0,64 mm
-------------	---	---	---	--	--	---	---

56 

64 

68 

72 

84 

1637 

73DPX056E

73DPX064E

73DPX068E

73DPX072E

73DPX084E

73DPX100R

3/8"		 75 : 1,6 mm		 5,5 mm	 30°	 55°	 0,64 mm
-------------	---	---	---	--	--	---	---

60 

66 

72 

84 

1637 

75DPX060E

75DPX066E

75DPX072E

75DPX084E

75DPX100R

3/8"		 72 : 1,3 mm		 5,5 mm	 30°	 55°	 0,64 mm
-------------	---	---	---	--	--	---	---

1637 

72DX100R

3/8"		 73 : 1,5 mm		 5,5 mm	 30°	 55°	 0,64 mm
-------------	---	---	---	--	--	---	---

68 

72 

1637 

73DX068E

73DX072E

73DX100R

3/8"		 75 : 1,6 mm		 5,5 mm	 30°	 55°	 0,64 mm
-------------	---	---	---	--	--	---	---

66 

72 

1637 

75DX066E

75DX072E

75DX100R

PowerCut™ 70-Series LPX

 50 → 100 cc

An ideal chain for professional woodcutters who use 3/8" pitch saws. Low-vibration, full chisel cutters offer top performance. Offset depth gauges prevent cutters from driving into the sidewall of the cut, offering a smoother cut.



3/8"	7	 72 : 1,3 mm	LubriTec™ OILING SYSTEM	 5,5 mm	 25°	 55°	 0,64 mm
-------------	----------	---	-----------------------------------	--	---	---	---

72 	1637 
72LPX072E	72LPX100R

3/8"	7	 73 : 1,5 mm	LubriTec™ OILING SYSTEM	 5,5 mm	 25°	 55°	 0,64 mm
-------------	----------	---	-----------------------------------	--	---	---	---

56 	60 	64 	68 	72 	84 	92 
73LPX056E	73LPX060E	73LPX064E	73LPX068E	73LPX072E	73LPX084E	73LPX092E
1637 						
73LPX100R						

3/8"	7	 75 : 1,6 mm	LubriTec™ OILING SYSTEM	 5,5 mm	 25°	 55°	 0,64 mm
-------------	----------	---	-----------------------------------	--	---	---	---

56 	60 	66 	72 	84 	1637 
75LPX056E	75LPX060E	75LPX066E	75LPX072E	75LPX084E	75LPX100R

DuraCut™ M70-Series LPX

 50 → 100 cc

Cut more between sharpenings in the toughest, dirtiest, or most abrasive conditions with this more durable version of our high-performing 3/8" pitch LPX chain; cuts up to 3 times longer. (Formerly named MultiCut™). Maintain with standard maintenance tools.



3/8"	7	 73 : 1,5 mm	LubriTec™ OILING SYSTEM	 5,5 mm	 25°	 55°	 0,64 mm
-------------	----------	---	-----------------------------------	--	---	---	---

64 	68 	72 	409 
M73LPX064E	M73LPX068E	M73LPX072E	M73LPX025R

3/8"	7	 75 : 1,6 mm	LubriTec™ OILING SYSTEM	 5,5 mm	 25°	 55°	 0,64 mm
-------------	----------	---	-----------------------------------	--	---	---	---

409 
M75LPX025R

PowerCut™ 70-Series EXL

 50 → 100 cc

Designed to require less force from the operator to get through the cut quickly, Oregon PowerCut™ 70-Series makes the job feel like less work.

Increased cutting performance, less effort.

Skip sequence available on EXJ version.



EXL : STANDARD



EXJ : SKIP SEQUENCE



3/8"	7	 72 : 1,3 mm	LubriTec™ OILING SYSTEM	 5,5 mm	 25°	 55°	 0,64 mm
-------------	----------	---	-----------------------------------	--	---	---	---

1637 

72EXL100R

3/8"	7	 73 : 1,5 mm	LubriTec™ OILING SYSTEM	 5,5 mm	 25°	 55°	 0,64 mm
-------------	----------	---	-----------------------------------	--	---	---	---

56 

60 

64 

68 

72 

84 

92 

1637 

73EXL056E

73EXL060E

73EXL064E

73EXL068E

73EXL072E

73EXL084E

73EXL092E

73EXL100R

3/8"	7	 75 : 1,6 mm	LubriTec™ OILING SYSTEM	 5,5 mm	 25°	 55°	 0,64 mm
-------------	----------	---	-----------------------------------	--	---	---	---

56 

60 

66 

72 

76 

84 

98 

114 

75EXL056E

75EXL060E

75EXL066E

75EXL072E

75EXL076E

75EXL084E

75EXL098E

75EXL114E

1637 

75EXL100R

PowerCut™ 70-Series EXJ

3/8"	7	 73 : 1,5 mm	LubriTec™ OILING SYSTEM	 5,5 mm	 25°	 55°	 0,64 mm
-------------	----------	---	-----------------------------------	--	---	---	---

1637 

73EXJ100R

3/8"	7	 75 : 1,6 mm	LubriTec™ OILING SYSTEM	 5,5 mm	 25°	 55°	 0,64 mm
-------------	----------	---	-----------------------------------	--	---	---	---

1637 

75EXJ100R


RipCut™ 70-Series RD

 50 → 100 cc

Specially made for ripping – making cuts parallel to the wood grain. 72, 73, 75 RD has a special ripping application grind for making dimensional boards and planks from larger timbers. For use on chain-type sawmills. Not recommended for handheld use.



3/8"		 72 : 1,3 mm	 5,5 mm	 10°	 50°	 0,64 mm
1637 						
72RD100R						

3/8"		 73 : 1,5 mm	 5,5 mm	 10°	 50°	 0,64 mm
1637 						
73RD100R						

3/8"		 75 : 1,6 mm	 5,5 mm	 10°	 50°	 0,64 mm
1637 						
75RD100R						

VersaCut™ 27X

 ≥ 65 cc

This is a heavy-duty, high-performance chain for professionals using large saws. Ideal for those who prefer the durability and easy maintenance of small-radius Micro Chisel cutters. Micro Chisel cutters have small-radius working corners for excellent performance and easy maintenance.




.404"		 27 : 1,6 mm	 LubriTec™ OILING SYSTEM	 5,5 mm	 30°	 55°	 0,75 mm
1480 							
27X100R							

VersaCut™ 59 ACL



 ≥ 65 cc

A big-timber, heavy-duty chain for professionals who use large saws especially in tropical hardwood areas. Rounded «Chipper» cutters have fully rounded working corner and side plate for excellent performance, easy sharpening and durability.



1480 


59ACL100R

PowerCut™ 59L



 ≥ 65 cc

A big-timber, heavy-duty chain for professionals who use large saws. Full chisel cutters offer top performance. Get less kickback without the added weight or bulk of other methods because of the depth gauge design.



1480 

59L100R

RipCut™ 27R



 ≥ 65 cc


Specially made for ripping — making cuts parallel to the wood grain. 27R - RX has a special ripping application grind for making dimensional boards and planks from larger timbers. Not recommended for handheld use.

Skip sequence available on RX version.

R : STANDARD




RX : SUPER SKIP SEQUENCE



1480 

27R100R

RipCut™ 27RX



1480 

27RX100R

Competitive chain Cross-Reference

		STIHL®		HUSQVARNA®	DOLMAR / MAKITA	EFCO / OLEO MAC	CARLTON®	
		P/N	ALT P/N	P/N	P/N	P/N	P/N	ALT P/N
1/4" LOW PROFILE	.043"	1,1mm	71PM3					
1/4"	.050"	1,3mm	13RM	13RMS	H00	466	E650MC-K	E1MC-BL E1MC
.325" LOW PROFILE	.043"	1,1mm	SP21G					
3/8" LOW PROFILE	.043"	1,1mm	61PMN	61PMM3	H38	290 / 291	N4C-BL	N4C
	.050"	1,3mm	63PM1	63PM3	H37 / S93G	492	N1C-BL	
	.050"	1,3mm	63PM1	63PM3	H37 / S93G	492	N1C-BL	
	.050"	1,3mm	63PM		H35	480	N150C-N	N1C
	.050"	1,3mm						
	.050"	1,3mm						
	.050"	1,3mm	63PMX					
.325"	.050"	1,3mm	23RM3 Pro		H30 / SP33G	484	K250NK-K	K1NK-BL K1NK
	.050"	1,3mm						
	.050"	1,3mm	23RM3	23RM	H22	082	K250C-K	K1C-BL K1C
	.058"	1,5mm	25RM3	25RM	H25	086	K258C-K	K2C-BL K2C
	.063"	1,6mm	26RM3	26RM	H28			K3C-BL K3C
	.050"	1,3mm	23RS3		H23			K1L-BL
	.058"	1,5mm	25RS3		H21	686		K2L-BL
	.063"	1,6mm	26RS3		H26			K3L-BL
	.058"	1,5mm						
	.050"	1,3mm	23RS				K250L-N	K1LX K1L
	.058"	1,5mm	25RS				K258L-N	K2LX K2L
	.063"	1,6mm	26RS				K263L-N	K3LX K3L
3/8"	.050"	1,3mm	33RM3		H51	101	A358EP-K	A1EP-BL
	.058"	1,5mm	35RM3		H54	093		A2EP-BL
	.063"	1,6mm	36RM3		H58	096		A3EP-BL
	.050"	1,3mm	33RM				A350EP-N	A1EP
	.058"	1,5mm	35RM		H49		A358EP-N	A2EP
	.063"	1,6mm	36RM		H44		A363EP-N	A3EP
	.050"	1,3mm	33RS3		H46	100		A1LM-BL
	.058"	1,5mm	35RS3		H42	099		A2LM-BL
	.063"	1,6mm	36RS3		H45	110		A3LM-BL
	.058"	1,5mm						
	.063"	1,6mm						
	.050"	1,3mm	33RS		H47 / C83			A1LM
	.058"	1,5mm	35RS		H48 / C85		A358LM-N	A2LM
	.063"	1,6mm	36RS		H50		A363LM-N	A3LM
	.058"	1,5mm						
	.063"	1,6mm						
	.050"	1,3mm						A1EP-RP
	.058"	1,5mm			H52			A2EP-RP
	.063"	1,6mm			H53			A3EP-RP
.404"	.063"	1,6mm	46RM		H64	103		B3S B3EP
	.063"	1,6mm			H66			
	.063"	1,6mm	46RS		H57		B463EP-N	B3LM
	.063"	1,6mm			H65	108		B3H-RP B3RM10
	.063"	1,6mm						



7

narrow
kerf

NEW	VersaCut™ 24AP	Semi-chisel		≤ 38 cc
	ControlCut™ 25AP	Micro Chisel®		≤ 38 cc
NEW	SpeedCut™ Nano 80TXL	Micro Chisel®		20 → 38 cc
	AdvanceCut™ 90PX	Chamfer Chisel™		≤ 42 cc
	Standard 91P	Chamfer Chisel™		≤ 42 cc
	AdvanceCut™ 91PX	Chamfer Chisel™		≤ 42 cc
	VersaCut™ 91VXL	Semi-chisel		≤ 42 cc
	DuraCut™ M91VXL	Semi-chisel		≤ 42 cc
	PowerSharp™ 91PS	Powersharp		≤ 42 cc
	RipCut™ 91R	Chamfer Chisel™		Ripping cuts only
	SpeedCut™ 95TXL	Micro Chisel®		38 → 55 cc
	DuraCut™ M95VPX	Micro Chisel®		38 → 55 cc
	ControlCut™ 20BPX	Micro Chisel®		38 → 62 cc
	ControlCut™ 21BPX	Micro Chisel®		38 → 62 cc
	ControlCut™ 22BPX	Micro Chisel®		38 → 62 cc
	PowerCut™ 20LPX	Full chisel		38 → 62 cc
	PowerCut™ 21LPX	Full chisel		38 → 62 cc
	PowerCut™ 22LPX	Full chisel		38 → 62 cc
	DuraCut™ M21LPX	Full chisel		38 → 62 cc
	PowerCut™ 20LGX	Full chisel		38 → 62 cc
	PowerCut™ 21LGX	Full chisel		38 → 62 cc
	PowerCut™ 22LGX	Full chisel		38 → 62 cc
	VersaCut™ 72DPX	Semi-chisel		50 → 100 cc
	VersaCut™ 73DPX	Semi-chisel		50 → 100 cc
	VersaCut™ 75DPX	Semi-chisel		50 → 100 cc
	VersaCut™ 72DX	Semi-chisel		50 → 100 cc
	VersaCut™ 73DX	Semi-chisel		50 → 100 cc
	VersaCut™ 75DX	Semi-chisel		50 → 100 cc
	PowerCut™ 72LPX	Full chisel		50 → 100 cc
	PowerCut™ 73LPX	Full chisel		50 → 100 cc
	PowerCut™ 75LPX	Full chisel		50 → 100 cc
	DuraCut™ M73LPX	Full chisel		50 → 100 cc
	DuraCut™ M75LPX	Full chisel		50 → 100 cc
	PowerCut™ 72EXL	Full chisel		50 → 100 cc
	PowerCut™ 73EXL	Full chisel		50 → 100 cc
	PowerCut™ 75EXL	Full chisel		50 → 100 cc
	PowerCut™ 73EXJ	Full chisel		50 → 100 cc
	PowerCut™ 75EXJ	Full chisel		50 → 100 cc
	RipCut™ 72RD	Semi-chisel		Ripping cuts only
	RipCut™ 73RD	Semi-chisel		Ripping cuts only
	RipCut™ 75RD	Semi-chisel		Ripping cuts only
	VersaCut™ 27X	Micro Chisel®		≥ 65 cc
	VersaCut™ 59ACL	Chipper		≥ 65 cc
	PowerCut™ 59L	Full chisel		≥ 65 cc
	RipCut™ 27R	Micro Chisel®		Ripping cuts only
	RipCut™ 27RX	Micro Chisel®		Ripping cuts only



This chart makes no comment whatsoever regarding the safety, or suitability for any particular purpose, of ANY saw chain not manufactured by Oregon Tool Inc. Read and follow all notes below to properly use this chart.

Notes:

This chart is intended for use by only those who wish to replace other brands of saw chain with a comparable Oregon chain.

Many saw chains are interchangeable in terms of their fit-up, but interchanging certain types of chains may be inappropriate for some users. Be certain that the chain chosen is appropriate for both the use, and for the user's level of experience.

This chart should not be used to replace Oregon saw chain with any other brand of chain. Doing so is a misuse of this chart and those who do so assume any and all risks associated with such misuse.

Most frequently requested chain spare parts*

									
1/4"	.050"	1,3mm	25AP			P23850	P23956	P18960	
3/8" LOW PROFILE	.043"	1,1mm	90PX	P23850	P23956	P18960			
	.050"	1,3mm	91P						
	.050"	1,3mm	91PX			P24295	P25068		
	.050"	1,3mm	91VXL			P24295	P25068		
	.050"	1,3mm	M91VXL			P24295	P25068		
	.050"	1,3mm	91PS						
	.050"	1,3mm	91R			P24295	P25068		
.325"	.050"	1,3mm	95TXL	P575972		P571847	P576686	P576808	P571846
	.050"	1,3mm	M95VPX				P101125		
	.050"	1,3mm	20BPX	P22574	P22575	P23843	P31939	P31938	P34178
	.058"	1,5mm	21BPX	P22574	P22575	P23843	P31939	P34177	P34179
	.063"	1,6mm	22BPX	P22574	P22575	P23843	P34185	P35711	P37530
	.050"	1,3mm	20LPX		P35746	P23843	P31939	P31938	
	.058"	1,5mm	21LPX		P35746	P23843	P31939	P34177	P34178
	.063"	1,6mm	22LPX		P35746	P23843	P34185	P35711	P37530
	.058"	1,5mm	M21LPX			P23843	P31939	P34177	P34178
	.050"	1,3mm	20LGX	P616222	P616223	P23843	P31939	P31938	
	.058"	1,5mm	21LGX	P616222	P616223	P23843	P31939	P34177	
	.063"	1,6mm	22LGX	P616222	P616223	P23843	P34185	P35711	
3/8"	.050"	1,3mm	72DPX/DX	P67418	P67419	P23837	P23910		P20857
	.058"	1,5mm	73DPX/DX	P67418	P67419	P23837	P23910		P20856
	.063"	1,6mm	75DPX/DX	P67418	P67419	P23837	P23910		P20858
	.050"	1,3mm	72LPX	P101925	P101926	P23837	P23910		P20857
	.058"	1,5mm	73LPX	P101925	P101926	P23837	P23910		P20856
	.063"	1,6mm	75LPX	P101925	P101926	P23837	P23921		P20858
	.058"	1,5mm	M73LPX						
	.063"	1,6mm	M75LPX						
	.050"	1,3mm	72EXL	P582369	P582370	P581897	P596323	P582349	
	.058"	1,5mm	73EXL	P582369	P582370	P581897	P596323	P582353	
	.063"	1,6mm	75EXL	P582369	P582370	P581897	P596362	P582350	
	.058"	1,5mm	73EXJ						
	.063"	1,6mm	75EXJ						
	.050"	1,3mm	72RD	P38951	P38952	P23837	P23910		
	.058"	1,5mm	73RD	P38951	P38952	P23837	P23910		
	.063"	1,6mm	75RD	P38951	P38952	P23837	P23921		
.404"	.063"	1,6mm	27X	P18998	P18999	P23825	P23868		
	.063"	1,6mm	59ACL	P23835	P23836	P23825	P23868	P65513	
	.063"	1,6mm	59L	P108795	P108796	P23825	P23868	P65513	
	.063"	1,6mm	27R	P35145	P35146	P23825	P23868	P17464	
	.063"	1,6mm	27RX						
3/4"	.122"	3,1mm	11H	P107541	P107542	P24569	P24577	P107543	

*other specific spare parts are available on request



**DESIGNED &
ENGINEERED
IN THE USA**


OREGON®

GUIDE BARS



Guide bar part numbers and families overview

Oregon bar part numbers are printed on the bar package and etched on the bar body.

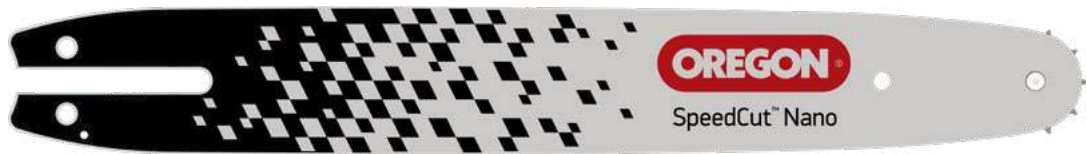

14 4 TXL N A074


Length inches (cm)		Gauge inches (cm)	Bar type	Sprocket nose codes Pitch Tooth		Bar Mount
08	20cm	4 .043" (1,1mm)	SD Single Rivet Sprocket-nose	1/4"	A 10	A041
10	25cm					A061
11	28cm	0 .050" (1,3mm)	ML Single Rivet Narrow kerf / Sprocket-nose	.325"	B 10 or 12	A064
12	30cm					A074
13	33cm	8 .058" (1,5mm)	SX AdvanceCut™ Sprocket-nose	3/8"	D 9 or 11	A089
14	35cm	3 .063" (1,6mm)	PX AdvanceCut™ Sprocket-nose	3/8"	E 7 or 9	A095
15	38cm					A218
16	40cm		ML AdvanceCut™ Narrow kerf / Sprocket-nose	.404"	F 10	A318
17	43cm					B083
18	45cm		SF AdvanceCut™ Sprocket-nose	.325"	G 12	D009
20	50cm		SP AdvanceCut™ HD Sprocket-nose	3/8"	H 11	D024
21	53cm		SL AdvanceCut™ HD Sprocket-nose	.325"	N 7	D025
22	55cm			Low Pro		D033
24	60cm		MP AdvanceCut™ HD Narrow kerf / Sprocket-nose	Solid nose code		D176
25	63cm					E031
28	70cm		PXL ControlCut™ Sprocket-nose		M Medium radius 1.33" - 33.78 mm	E099
30	75cm		TXL SpeedCut™ SpeedCut™ Nano Narrow kerf / Sprocket nose		L Large radius 1.65" - 41.91mm	K041
32	80cm					K153
33	83cm		VXL VersaCut™ sprocket nose			K095
34	85cm					T041 Intenz®
36	90cm		RN PowerCut™ Replaceable sprocket-nose			
41	103cm					
42	105cm		AT DuraCut™ Solid nose, laser welded tip with wear-resistant alloy			

Comments:


- Chainsaws originally equipped with an Intenz® bar, and saws adapted to take an Intenz® bar, do not have a "bar adjustment pin" for tensioning the chain. Use ONLY an Intenz® bar when replacing the guide bar on these saws.
- PowerCut® solid body bars may be stamped with XXX, ZZZ or other letters as they can have different noses installed on the body, thereby changing the part number.
- Oregon Sculptor™ carving bar part numbers do not follow the Oregon bar part numbering system.
- In a few cases, where two bars would have the same length in their part numbers but different drive link counts, the letter Z will be used in the bar mount description to distinguish between them (K095 and Z095 for example).

Guide bar nose types


Single Rivet

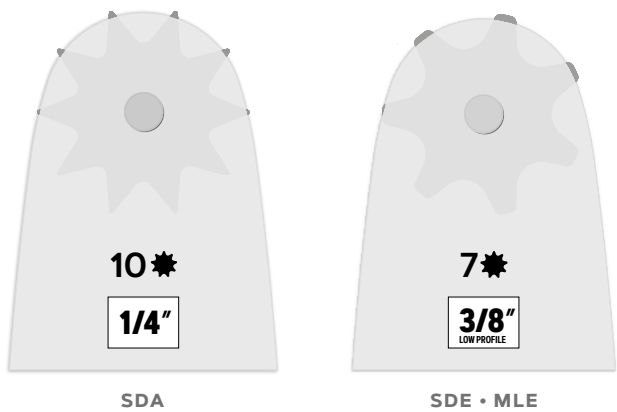


Sculptor®

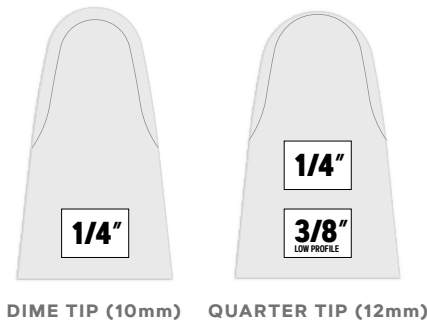


AdvanceCut™

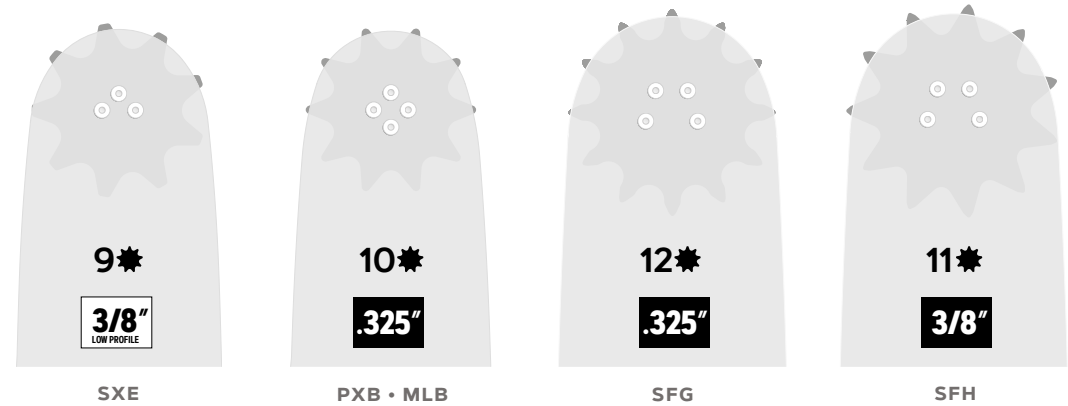


AdvanceCut™ HD ControlCut SpeedCut VersaCut

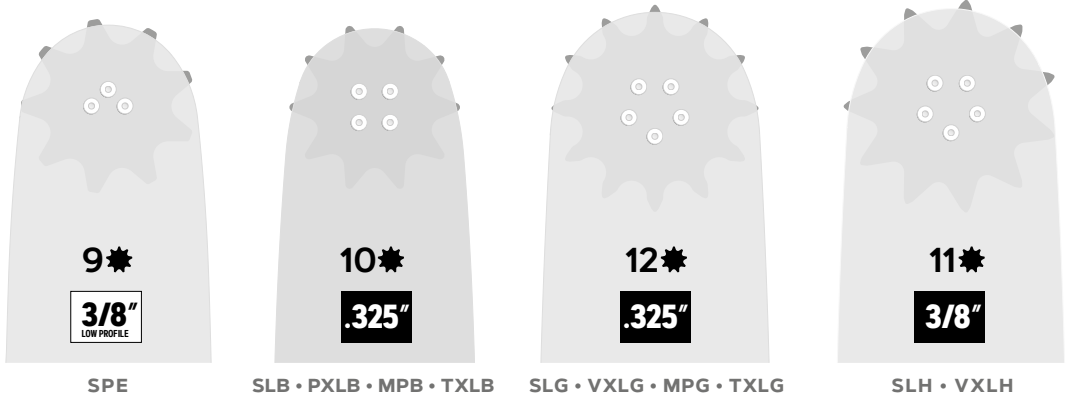

PowerCut™

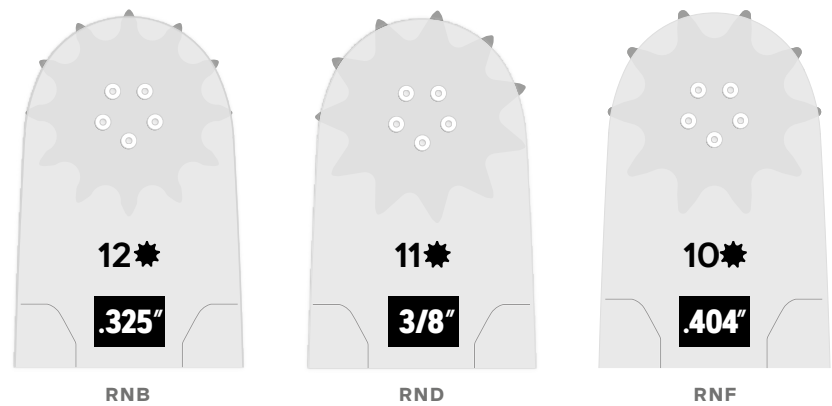

DuraCut™

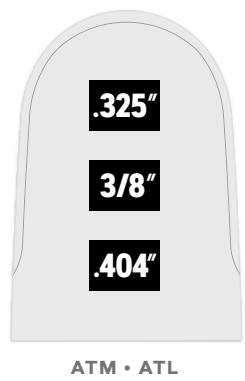


Single Rivet

 Electric or gas up to 42cc

For homeowners who only have an occasional need to use a chain saw. The single-rivet, smaller-radius noses helps reduce kickback.

 **PowerSharp®** ready



1/4"	 1,3mm	 10 tooth
-------------	---	--

 10" (25cm)	
100SDAA041	58
100SDAA318	58

3/8" LOW PROFILE	 1,1mm	 Narrow Kerf	 7 tooth
----------------------------	---	---	---

 8" (20cm)		10" (25cm)		12" (30cm)		14" (35cm)		16" (40cm)	
084MLEA041	34	104MLEA218	39	124MLEA041	45	144MLEA041	52	164MLEA041	56
		104MLEA318	39	124MLEA074	44	144MLEA074	50		
				124MLEA095	45	144MLEA095	52		


3/8" LOW PROFILE	 1,3mm	 7 tooth
----------------------------	---	---

 8" (20cm)		10" (25cm)		12" (30cm)		14" (35cm)		16" (40cm)		18" (45cm)	
080SDEA041	33	100SDEA041	40	120SDEA041	45	140SDEA041	52	160SDEA041	56	180SDEA041	62
		100SDEA218	39	120SDEA074	44	140SDEA074	50	160SDEA074	55	180SDEA095	60
				120SDEA095	45	140SDEA095	52	160SDEA095	56	180SDEA318	60
				120SDEA318	44	140SDEA318	49	160SDEA318	54		
						140SDET041	52	160SDEA129	56		
								160SDET041	56		

A	3/8" LOW PROFILE	 1,3mm	 7 tooth	 PowerSharp®
----------	----------------------------	---	---	--



 14" (35cm)			 16" (40cm)		
542310	52	A041	542314	56	A041
542311	50	A074			



B =  : see PowerSharp chain and stone on page 24

AdvanceCut™

 ≤ 57 cc

Multi-rivet nose, lightweight, and maneuverable.
For experienced homeowners, as well as farmers and firewood cutters.



3/8" LOW PROFILE	1 1/2" 1,3mm	 9 tooth
----------------------------	---------------------	---

	10" (25cm)		12" (30cm)		14" (35cm)		16" (40cm)	
	100SXEA041	40	120SXEA041	45	140SXEA041	52	160SXEA041	56
			120SXEA074	44	140SXEA074	50	160SXEA074	55
			120SXEA095	45	140SXEA095	52	160SXEA095	56
							160SXEA318	56

.325"	1 1/2" 1,3mm	 Narrow Kerf	 10 tooth
--------------	---------------------	---	--

	13" (33cm)		15" (38cm)		16" (40cm)		18" (45cm)	
	130MLBK041	56	150MLBK041	64	160MLBK041	66	180MLBK041	72
	130MLBK095	56	150MLBK095	64	160MLBK095	66	180MLBK095	72

.325"	1 1/2" 1,3mm	 10 tooth
--------------	---------------------	--

	16" (40cm)		18" (45cm)		20" (50cm)	
	160PXBK095	66	180PXBK095	72	200PXBK095	78

.325"	1 1/2" 1,5mm	 10 tooth
--------------	---------------------	--

	13" (33cm)		15" (38cm)		16" (40cm)		18" (45cm)		20" (50cm)	
	138PXBK095	56	158PXBK095	64	168PXBK095	66	188PXBK095	72	208PXBK095	78
			158PXBK041	64	168PXBK041	66			208PXBZ095	76

.325"	1 1/2" 1,5mm	 12 tooth
--------------	---------------------	--

	18" (45cm)	
	188SFGK095	72

.325"

 1,6 mm

 10 tooth

	16" (40cm)		18" (45cm)	
	163PXBA074	62	183PXBA074	68

.325"

 1,6 mm

 12 tooth

	15" (38cm)		16" (40cm)		18" (45cm)	
	153SFGD025	62	163SFGD025	67	183SFGD025	74

3/8"

 1,5 mm

 11 tooth

	15" (38cm)		16" (40cm)		18" (45cm)		20" (50cm)		24" (60cm)	
	158SFHD009	56	168SFHD009	60	188SFHD009	68	208SFHD009	72	248SFHD009	84
					188SFHK095	68	208SFHD024	72		

3/8"

 1,6 mm

 11 tooth

	15" (38cm)		16" (40cm)		18" (45cm)		20" (50cm)		24" (60cm)	
	153SFHD025	56	163SFHD025	60	183SFHD025	66	203SFHD025	72	243SFHD025	84

AdvanceCut™ HD

 38 → 65 cc

Heavy Duty laminated bars designed for higher power applications on small to medium-size chainsaws. Ideal for professional and semi-professional users.



3/8" LOW PROFILE		1,3mm	9 tooth			
	12" (30cm)		14" (35cm)		16" (40cm)	
	120SPEA074	44	140SPEA074	50	160SPEA041	56
					160SPEA074	55

.325"	 1,3mm	 Narrow Kerf	 10 tooth		
	15" (38cm)		18" (45cm)		
	150MPBK095	64	180MPBK095	72	

.325"  1,5mm		 10 tooth			
	13" (33cm) 138SLBK095		15" (38cm) 158SLBK095		16" (40cm) 168SLBK095
	56		64		66
	18" (45cm) 188SLBK095				
	72				

.325"	 1,5mm	 12 tooth			
	15" (38cm)		18" (45cm)		
	158SLGK095	64	188SLGK095	72	

.325"	 1,6mm	 10 tooth		
	16" (40cm)			
	163SLBA074	62		

 3/8"		 1,5mm		 11 tooth		
	15" (38cm)		18" (45cm)		20" (50cm)	
	158SLHD009	56	188SLHD009	68	208SLHD009	72
	158SLHK095	56	188SLHK095	64		
	158SLHK153	56				


3/8"	 1,6mm	 11 tooth				
	16" (40cm)		18" (45cm)		20" (50cm)	
	163SLHD025	60	183SLHD025	66	203SLHD025	72



NEW SpeedCut™ Nano 80TXL

.325"
LOW PROFILE

 20 → 38 cc



SpeedCut™ Nano has been engineered from the ground up with maximum efficiency in mind. Built to optimize saw performance, SpeedCut Nano meets the demands of tree care professionals like no other system on the market.

SpeedCut Nano is the first ever .325" Low Profile™ cutting system. By sizing the chain to better match the specific power range of battery-powered and compact light-weight gas-powered saws, we've maximized the chain's efficiency for improved performance.

Stihl		10" (25cm) 		12" (30cm) 		14" (35cm) 		16" (40cm) 					
MS 150, MS 150T MS 151, MS 151T	610727N	104TXLNA074	80TXL046E	46	124TXLNA074	80TXL051E	51	144TXLNA074	80TXL059E	59			
MSA 161T	625333	104TXLNA074	80TXL046E	46	124TXLNA074	80TXL051E	51	144TXLNA074	80TXL059E	59	164TXLNA074	80TXL064E	64
MS 170, MS 171, MS 180, MS 181	610726N				124TXLNA074	80TXL051E	51	144TXLNA074	80TXL059E	59	164TXLNA074	80TXL064E	64
MS 192, MS 192T, MS 193, MS 193T, MS 194, MS 194T, MS 200, MS 200T, MS 201, MS 201T	610725N	104TXLNA074	80TXL046E	46	124TXLNA074	80TXL051E	51	144TXLNA074	80TXL059E	59	164TXLNA074	80TXL064E	64

Husqvarna		10" (25cm) 		12" (30cm) 		14" (35cm) 		16" (40cm) 					
T435	610729N												
T525	627943												
535i XP, T535i XP 536Li XP,T536Li XP, 540i XP, T540i XP	610730N	104TXLNA095	80TXL046E	46	124TXLNA095	80TXL051E	51	144TXLNA095	80TXL059E	59	164TXLNA095	80TXL064E	64
T540 XP, T540 XP II	610728N												

Echo		10" (25cm) 		12" (30cm) 		14" (35cm) 		16" (40cm) 					
CCS-58V	629320												
CS-251ITES	629318	104TXLNA041	80TXL046E	46	124TXLNA041	80TXL051E	51	144TXLNA041	80TXL059E	59	164TXLNA041	80TXL064E	64
CS-303T	629322												

SpeedCut™ Nano CUTTING SYSTEM + +

CONVERSION KITS



80TXL must be used together with the corresponding guide bar and sprocket and is not compatible with other existing cutting systems. SpeedCut Nano conversion kits include a sprocket, a guide bar and a chain loop.

Stihl®	10" (25cm) 	12" (30cm) 	14" (35cm) 	16" (40cm) 
MS 150, MS 150T MS 151, MS 151T	635137	614383	614382	
MSA 161T	637260	637261	637262	637263
MS 170, MS 171 MS 180, MS 181		637259	614384	614385
MS 192, MS 192T MS 193, MS 193T MS 194, MS 194T MS 200, MS 200T MS 201, MS 201T	614379	614380	614377	614381
Husqvarna®	10" (25cm) 	12" (30cm) 	14" (35cm) 	16" (40cm) 
T 435	614388	614391	614395	614398
T 525	637264	637265	637266	637267
535i XP, T535i XP, 536Li XP, T536LiXP, 540i XP, T540i XP	614389	614392	614396	614399
540, T540 XP, T540 XP II	614387	614390	614393	614397
Echo	10" (25cm) 	12" (30cm) 	14" (35cm) 	16" (40cm) 
CCS-58V	637231	637232	637233	637234
CS-2511TES	637235	637236	637237	637238
CS-303T	637255	637256	637257	637258



ControlCut™

 38 → 65 cc

For users who require smooth and controlled cuts. Smaller radius nose reduces kickback. The lighter weight helps reduce operator fatigue.



.325"	1,5 mm	10 tooth
--------------	---------------	-----------------

	13" (33 cm)		15" (38 cm)		16" (40 cm)		18" (45 cm)	
	138PXLBK095	56	158PXLBK041	64	168PXLBK095	67	188PXLBK095	72
			158PXLBK095	64				

.325"	1,6 mm	10 tooth
--------------	---------------	-----------------

	16" (40 cm)		18" (45 cm)	
	163PXLBA074	62	183PXLBA074	68

SpeedCut™

 38 → 55 cc

For professionals who cut high volumes of wood. Narrow kerf. Durable and efficient. The lighter weight helps reduce operator fatigue.



.325"	1,3 mm		10 tooth
--------------	---------------	---	-----------------

	13" (33 cm)		15" (38 cm)		16" (40 cm)		18" (45 cm)		20" (50 cm)	
	130TXLBK095	56	150TXLBK095	64	160TXLBK095	66	180TXLBK095	72	200TXLBK095	78
			150TXLGD025	64	160TXLGD025	66	180TXLGD025	72		
							180TXLBA074	72		

VersaCut™

 38 → 65 cc

Ideal solution for arborists, orchardists, and other professionals who cuts with a variety of applications. Versatile and durable. The lighter weight helps reduce operator fatigue.



.325"	1,3mm	12 tooth
--------------	--------------	-----------------

	16" (40 cm)		18" (45 cm)	
	160VXLGK095	66	180VXLGK041	72
			180VXLGK095	72

.325"	1,5mm	12 tooth
--------------	--------------	-----------------

	15" (38 cm)		16" (40 cm)		18" (45 cm)		20" (50 cm)	
	158VXLGK041	64	168VXLGK041	66	188VXLGK041	72	208VXLGK095	80
	158VXLGK095	64	168VXLGK095	66	188VXLGK095	72		

.325"	1,6mm	12 tooth
--------------	--------------	-----------------

	15" (38 cm)		16" (40 cm)		18" (45 cm)		20" (50 cm)	
	153VXLGD025	62	163VXLGD025	67	183VXLGD025	74	203VXLGD025	81

3/8"	1,3mm	11 tooth
-------------	--------------	-----------------

	16" (40 cm)		20" (50 cm)		24" (60 cm)	
	160VXLHD025	56	200VXLHD009	60	240VXLHD009	84
			200VXLHD025	60	240VXLHD025	84

3/8"	1,5mm	11 tooth
-------------	--------------	-----------------

	15" (38 cm)		16" (40 cm)		17" (43 cm)		18" (45 cm)		20" (50 cm)	
	158VXLHD009	56	168VXLHD009	60	178VXLHD009	64	188VXLHD009	68	208VXLHD009	72
	158VXLHK095	56	168VXLHK095	60			188VXLHK095	64	208VXLHK095	72
							188VXLHZ095	68		
							188VXLHK153	64		
							188VXLHD176	64		

3/8"	1,6mm	11 tooth
-------------	--------------	-----------------

	15" (38 cm)		16" (40 cm)		18" (45 cm)		20" (50 cm)	
	153VXLHD025	56	163VXLHD025	60	183VXLHD025	66	203VXLHD025	72

PowerCut™

 ≥ 57 cc

For loggers and other tree-cutting professionals that need heavy-use guide bars. PowerCut's chrome-moly steel body is tough and powerful, enabling you to cut through timber precisely and efficiently. The replaceable sprocket nose reduces the need for new guide bars, giving the PowerCut bar a longer life and greater durability.



.325"	1,5 mm	12 tooth
--------------	---------------	-----------------

	15" (38 cm)		16" (40 cm)		18" (45 cm)		20" (50 cm)	
	158RNBK095	64	168RNBK095	66	188RNBK095	72	208RNBK095	78

.325"	1,6 mm	12 tooth
--------------	---------------	-----------------

	16" (40 cm)		18" (45 cm)	
	163RNBD025	67	183RNBD025	74

3/8"	1,3 mm	11 tooth
-------------	---------------	-----------------

	20" (50 cm)		24" (60 cm)		28" (70 cm)	
	200RNDD009	72	240RNDD025	84	280RNDK095	93
	200RNDD176	70	240RNDD176	81		

3/8"	1,5 mm	11 tooth
-------------	---------------	-----------------

	13" (38 cm)		15" (38 cm)		16" (40 cm)		17" (43 cm)		18" (45 cm)	
	138RNDD009	52	158RNDD009	56	168RNDD009	60	178RNDD009	64	188RNDD009	68
					168RNDK095	60	178RNDB083	64	188RNDK095	68
	20" (50 cm)		22" (55 cm)		24" (60 cm)		26" (65 cm)		28" (70 cm)	
	208RNDD009	72	228RNDD009	76	248RNDD009	84	268RNDD009	89	288RNDD009	92
	208RNDK095	72			248RNDK095	84				
	208RNDD024	72								
	208RNDD033	72								
	208RNDB083	72								
	(D176) 8873D	72								
	30" (75 cm)									
	308RNDD009	102								

3/8"	 1,6 mm	 11 tooth								
	16" (40 cm)		18" (45 cm)		20" (50 cm)		22" (55 cm)		24" (60 cm)	
	163RNDD025	60	183RNDD025	68	203RNDD025	72	223RNDD025	77	243RNDD025	84
					203RNDD009	72				
	28" (70 cm)		30" (75 cm)		32" (80 cm)		36" (90 cm)		42" (105 cm)	
	283RNDD025	91	303RNDD025	98	323RNDD025	105	363RNDD025	115	423RNDD025	135
							363RNDD009	115	423RNDD009	135

.404"	 1,6 mm	 10 tooth		
	24" (60 cm)		36" (105 cm)	
	243RNFD009	76	363RNFD009	104

PowerCut™ Replacement Nose



Long nose takes most of the abuse and minimizes wear on the bar body of PowerCut (Power Match®) bars. A single nose for 1,3 mm (.050"), 1,5 mm (.058"), and 1,6 mm (.063") gauges. Attachment rivet included. (Nose radius 1.115"). Standard replacement sprocket nose (RSN) kits fit "RN" bars.

.325"	1,3 mm - 1,5 mm - 1,6 mm	12 tooth
--------------	---------------------------------	-----------------

34775 | Standard Replacement Sprocket Nose Kit

3/8"	1,3 mm - 1,5 mm - 1,6 mm	11 tooth
-------------	---------------------------------	-----------------

30853 | Standard Replacement Sprocket Nose Kit

.404"	1,3 mm - 1,5 mm - 1,6 mm	10 tooth
--------------	---------------------------------	-----------------

30855 | Standard Replacement Sprocket Nose Kit

DuraCut™

 ≥ 38 cc

Created for all challenging and abrasive environments, including fire-damaged forests, deserts, or sandy environments, and areas where the wood is unstable and requires extra care. DuraCut has an ultra high-wear resistant stellite nose and chrome-moly steel body to give you a longer-lasting tool for the most punishing environments.



3/8"	1 1/8" 1,3mm		Medium nose
-------------	---------------------	---	-------------

	20" (50cm)	
	200ATMD009	72

This list shows the most common applications, pitches and associated drive link counts for Duracut bars.

3/8"	1 1/8" 1,5mm		Medium nose
-------------	---------------------	---	-------------

	16" (40cm)		17" (43cm)		18" (45cm)		20" (50cm)		24" (60cm)		28" (70cm)	
	168ATMD009	60	178ATMD009	64	188ATMD009	68	208ATMD009	72	248ATMD009	84	288ATMD009	92
	168ATMK095	60					208ATMK095	72				
							208ATMD024	72				

3/8"	1 1/8" 1,6mm		Medium nose
-------------	---------------------	---	-------------

	16" (40 cm)		18" (45 cm)		20" (50 cm)		24" (60 cm)	
	163ATMD025	60	183ATMD025	68	203ATMD025	72	243ATMD025	84

.404"	1 1/8" 1,6mm		Medium nose
--------------	---------------------	---	-------------

	17" (43 cm)		24" (60 cm)		36" (90 cm)	
	173ATMD033	61	243ATMD009	76	363ATMD025	104

.404"	1 1/8" 1,6mm		Large nose
--------------	---------------------	---	------------

	25" (63 cm)		30" (75 cm)		36" (90 cm)		42" (105 cm)	
	253ATLE099	84	303ATLE099	92	363ATLD009	104	423ATLE086	124
					363ATLE099	104		

Sculptor™



 Electric or gas 38 -> 65 cc

Sculptor™ Guide Bars are specially developed for chainsaw carving.

An essential tool for chainsaw artists seeking long-lasting performance and versatility.

- Manufactured with high-quality steel
- Precision gas-welded high cobalt/chrome alloy hard-facing material for better nose performance and life
- Clear-coated, brushed steel for distinctive and durable appearance and finish

1/4"

 1,3mm

 Dime tip 10 mm

	10" (25 cm)				12" (30 cm)		
	535044	60	A041 / A095		535045	68	A041 / A095

1/4"

 1,3mm

 Quarter tip 12 mm

	12" (30 cm)				14" (35 cm)		
	535047	68	A041 / A095		535048	76	A041 / A095
		68	A074			75	A074


3/8"
LOW PROFILE

 1,3mm

 Quarter tip 12 mm


	12" (30 cm)				14" (35 cm)		
	535047	47	A041 / A095		535048	52	A041 / A095
		47	A074			51	A074

A041 - K041 - T041

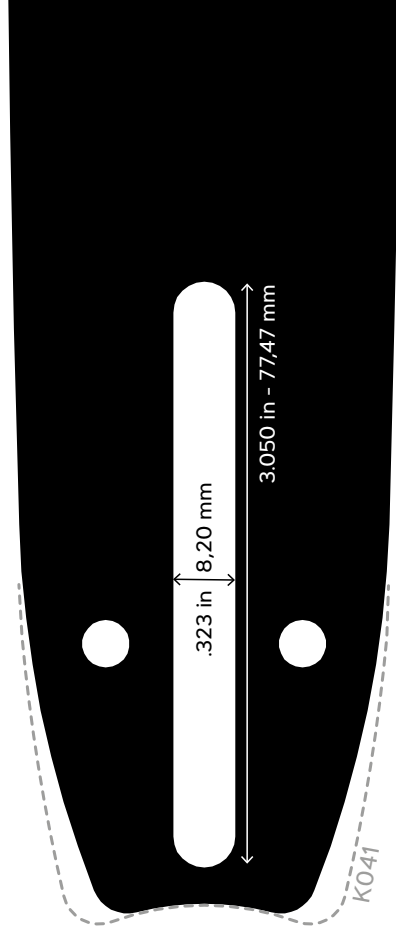

OEM Applications: AEG, Active, AL-KO, Alpina, Black+Decker, Bosch, Castor, Cub Cadet®, Dolmar, Draper, Echo®, Efco®, Einhell®, Gardena, Greenworks, Grizzly, Hecht, Hitachi, Homelite®, Husqvarna®, Ikra, Iseki, Jonsered®, Makita®, McCulloch®, MTD, Oleo-Mac®, Partner, Poulan®/Poulan Pro®, Ryobi®, Shindaiwa, Skil®, Solo, Stiga, Tanaka®, Zenoah, and others

A095 - K095 - Z095*

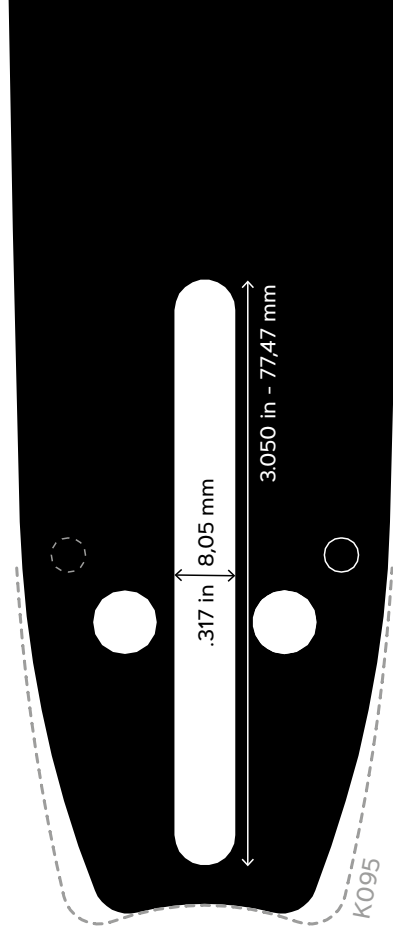


***Note:**

In a few cases where two bars would have the same called length but different drive-link counts, the letter Z will be used in the motor-mount description to distinguish between them (K095 and Z095 for example).


OEM Applications: AL-KO, Alpina, Castor, Cub Cadet®, Dolmar, Efco®, Einhell®, Hecht, Homelite®, Husqvarna®, Jonsered®, Makita®, McCulloch®, Metabo®, Mitox, MTD, Oleo-Mac®, Partner, Pioneer, Poulan®/Poulan Pro®, Ryobi®, Shindaiwa, Solo®, Stiga®, Zenoah®, and others

A074

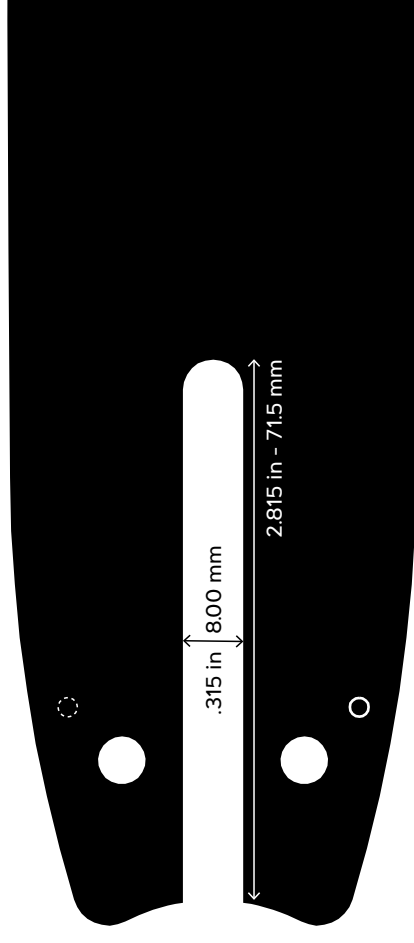

OEM Applications: Alpina, Castor, Metabo®, Oleo-Mac®, Stiga®, Stihl®


A108

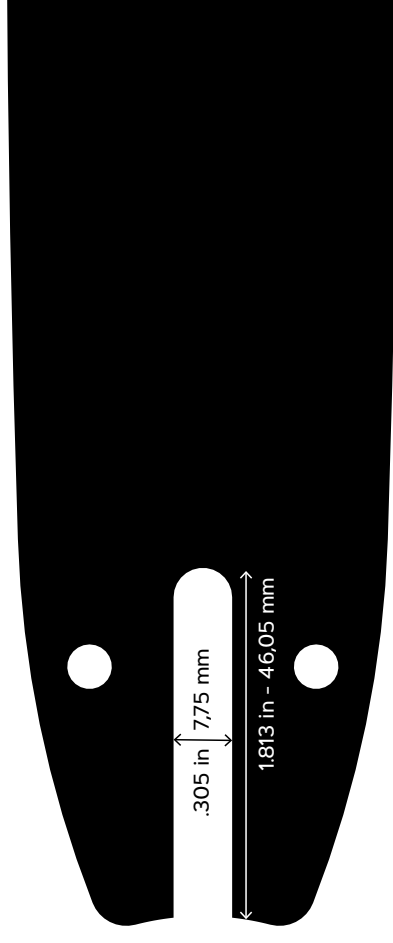

OEM Applications: Campagnola


Most Popular guide bar motor mounts

A129

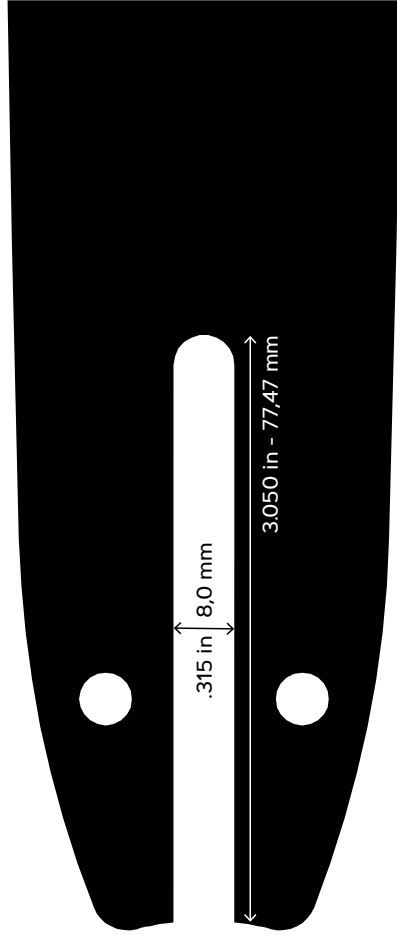


OEM Applications: Efco®, Grizzly, Oleo-Mac®

A218

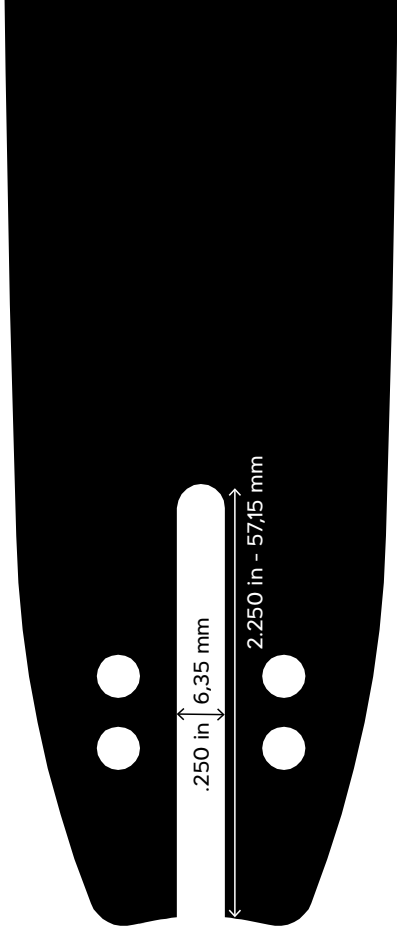


OEM Applications: Active, AL-KO, Black+Decker®, Bosch, Dolmar, Makita®, McCulloch®, Power Pruner®, Echo® Power Pruner®, Polesaws, Ryobi®, Shindaiwa, Stiga®, and others

A318

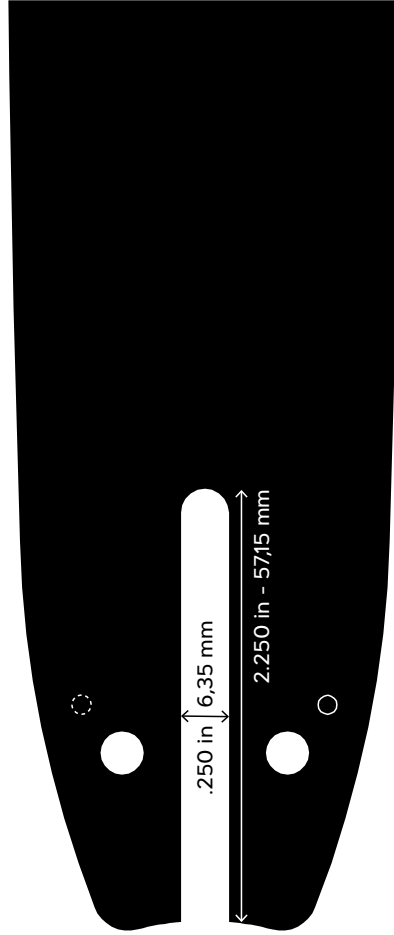

OEM Applications: AL-KO, Black+Decker®, Dolmar, Echo®, Efco®, Einhell®, Grizzly, McCulloch®, Oleo-Mac®, Ryobi®, Shindaiwa, Stiga®, and others

B083

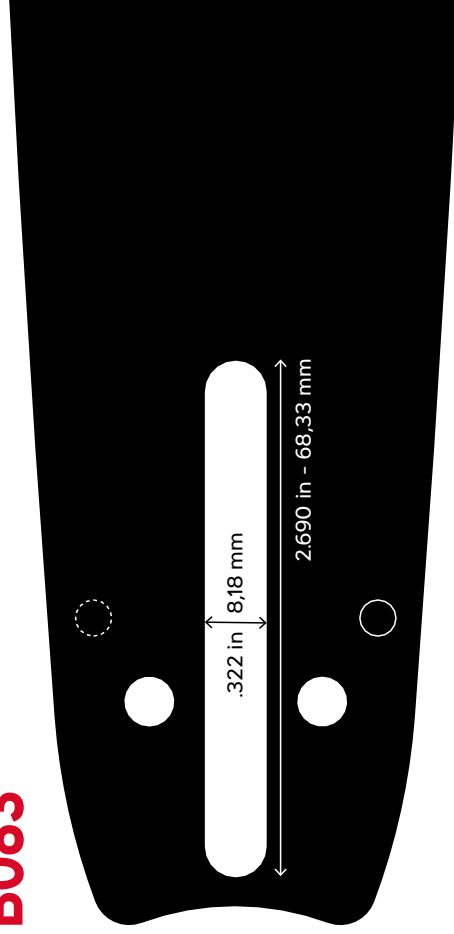


OEM Applications: Dolmar, Makita®




Rotate 90° to match the 1:1 exact size (printed version)

K153

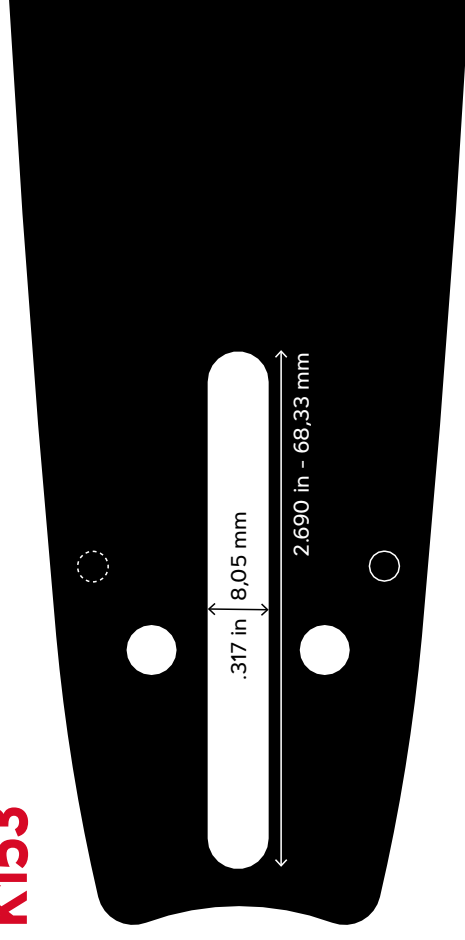


OEM Applications: Dolmar, Makita®

K216

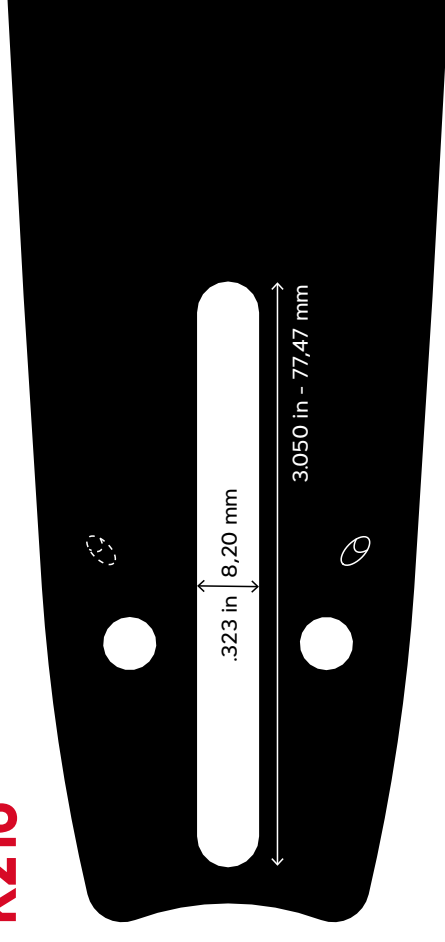

OEM Applications: Echo®, Shindaiwa


D009

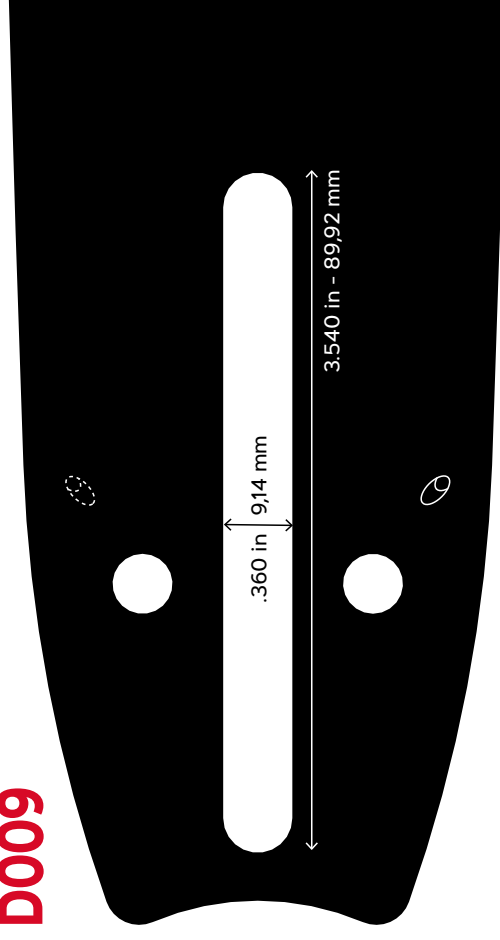

Note: VXL have oval holes and shorter slots


OEM Applications: Alpina, AL-KO, Dolmar, Efco®, Husqvarna®, Iseki, Jonsered®, Makita®, Oleo-Mac®, Partner, Shindaiwa, Solo®

D024

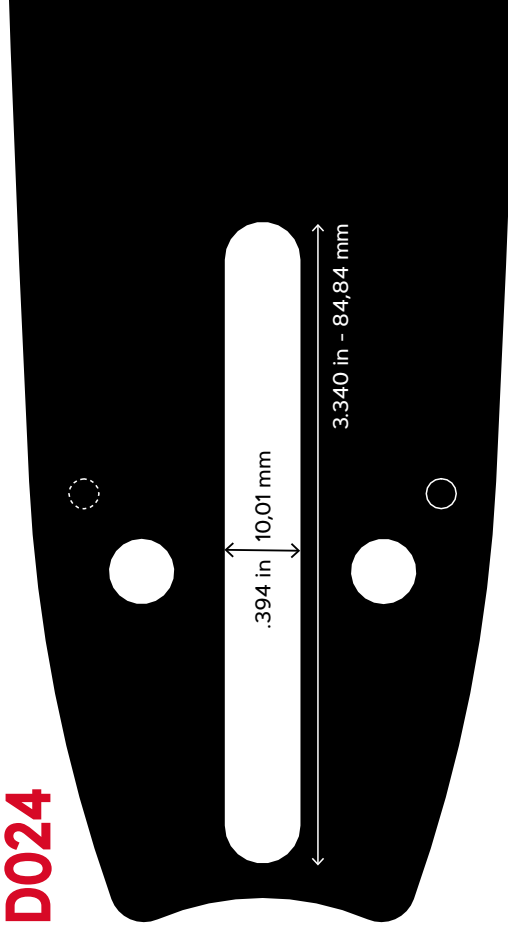


OEM Applications: Efco®, Ikra, Jonsered®, Oleo-Mac®, Partner

D025

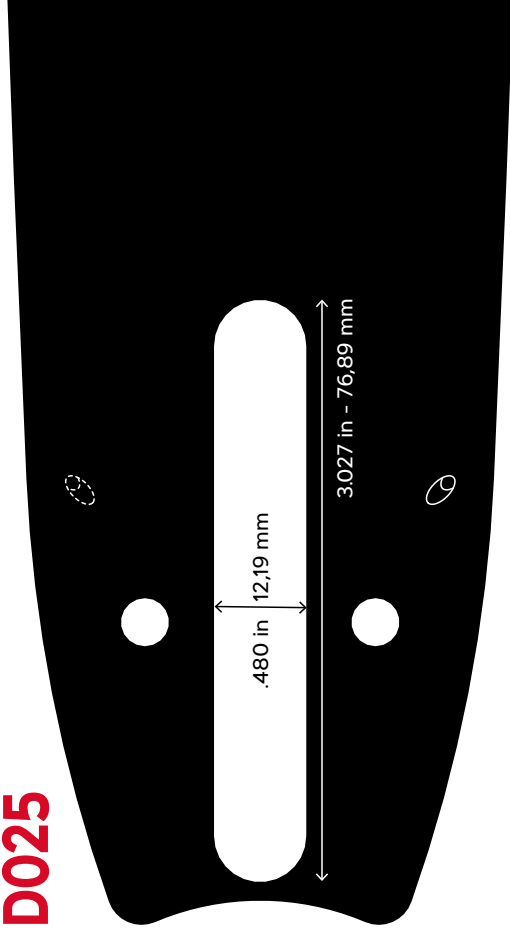


OEM Applications: AEG, Stihl®

D033

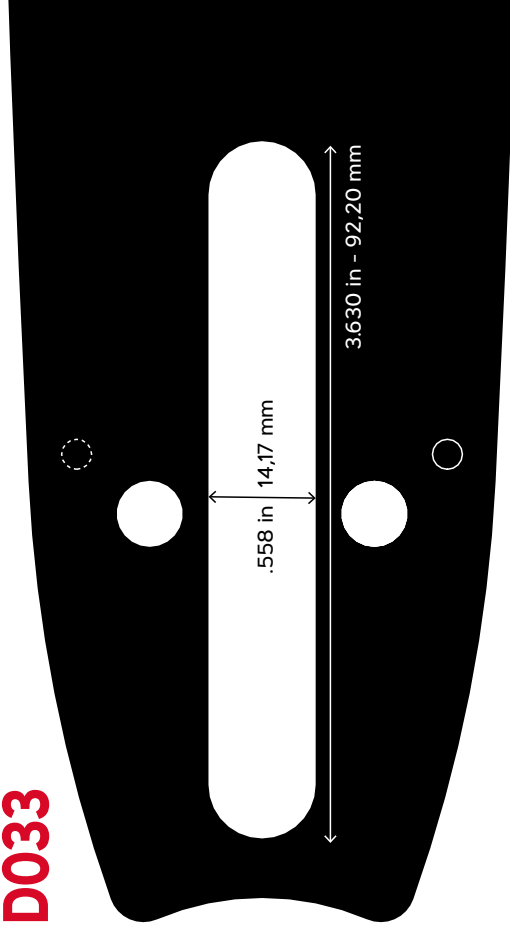


OEM Applications: Dolmar, Makita®, Poulan®

D176

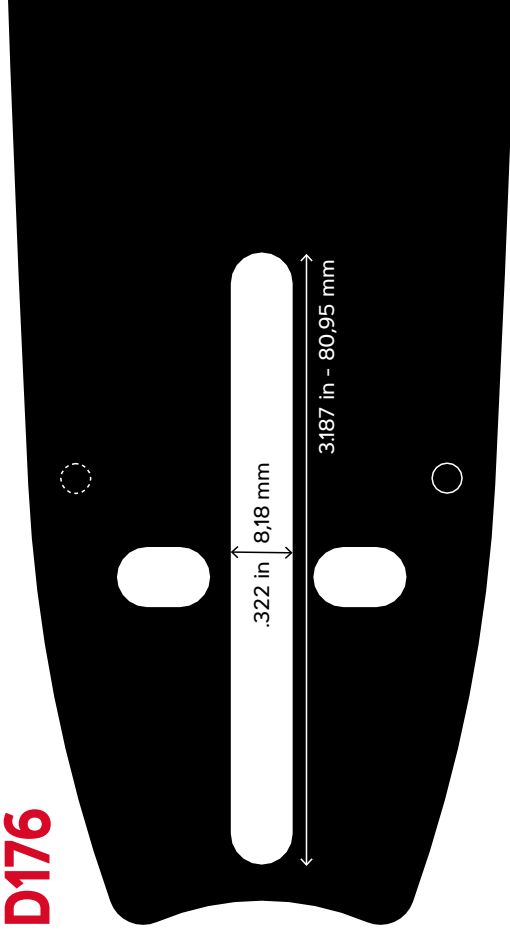

OEM Applications: AL-KO, Echo®, Poulan®/Poulan Pro®, Shindaiwa, Tanaka®, Zenoah®

E031

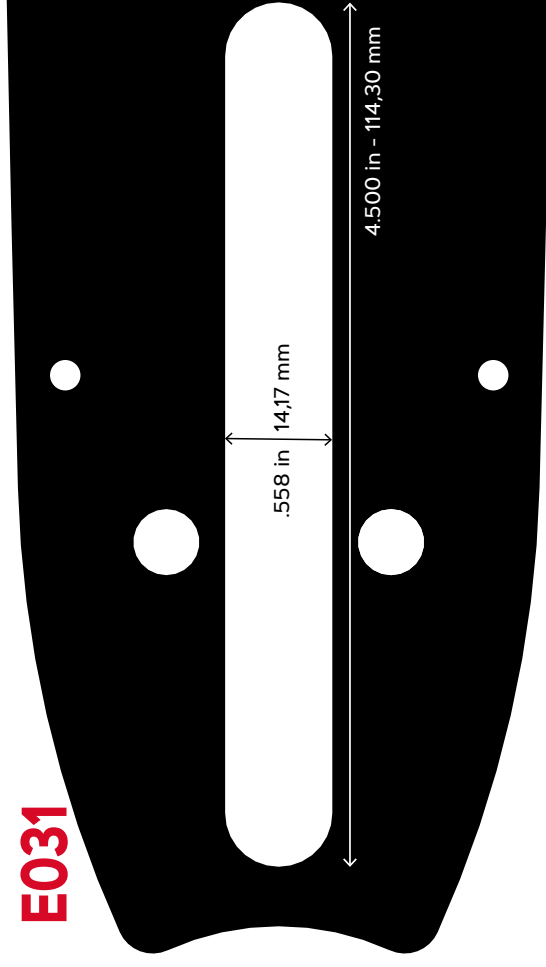

OEM Applications: Efco®, Hydrochief, Oleo-Mac®, Stihl®

Alternative packaging

COMBIPACK: 1 GUIDE BAR + 2 CHAINS



				BAR PN	CHAIN PN		OREGON	OEM Application	
3/8" LOW PROFILE	1,3mm .50"	12"	A041	120SDEA041	91P045E	45	561605	Dolmar, Homelite®, Jonsered®, Makita®, Oleo-Mac®, Partner	4
			A074	120SDEA074	91P044E	44	567295	Stihl®	
		14"	A041	140SDEA041	91P052E	52	543437	Dolmar, Homelite®, Jonsered®, Makita®, Oleo-Mac®, Partner	
			A041	140SXEAO41	91VXL052E	52	561601	Dolmar, Homelite®, Jonsered®, Makita®, Oleo-Mac®, Partner	
			A074	140SDEA074	91P050E	50	543482	Stihl®	
			A074	140SXEAO74	91VXL050E	50	559166	Stihl®	
		16"	A041	160SXEAO41	91VXL056E	56	561660	Dolmar, Homelite®, Jonsered®, Makita®, Oleo-Mac®, Partner	
			A041	160SDEA041	91P056E	56	543483	Dolmar, Husqvarna®, Efco®, Makita®, Partner	
			A074	160SXEAO74	91VXL055E	55	561603	Stihl®	
			A074	160SDEA074	91P055E	55	543484	Stihl®	
.325"	1,3mm .50"	13"	K095	130MLBK095	95TXL056E	56	581621	Dolmar, Husqvarna®, Efco®, Makita®, Partner	4
			K095	130TXLBK095	95TXL056E	56	578707	Dolmar, Husqvarna®, Efco®, Makita®, Partner	
			D025	130TXLBD025	95TXL056E	56	578741	Stihl®	
		15"	K095	150MLBK095	95TXL064E	64	581620	HDolmar, Husqvarna®, Efco®, Makita®, Partner	
				150TXLBK095	95TXL064E	64	578708	Dolmar, Husqvarna®, Efco®, Makita®, Partner	
		18"	K095	180MLBK095	95TXL072E	72	581619	Dolmar, Husqvarna®, Efco®, Makita®, Partner	
			K095	180TXLBK095	95TXL072E	72	578739	Dolmar, Husqvarna®, Efco®, Makita®, Partner	
	1,5mm .58"	13"	K095	138PXBK095	21BPX056E	56	543479	Husqvarna, Jonsered, Dolmar, Partner, m.fl.	
			D025	138PXBK095	21BPX056E	56	543480	Stihl®	
		15"	K095	158PXBK095	21BPX064E	64	543486	Husqvarna, Jonsered, Dolmar, Partner	
		18"	K095	188SFGK095	21BPX072E	72	556429	Husqvarna, Jonsered, Dolmar, Partner	
	1,6mm .63"	15"	D025	153SFGD025	22BPX062E	62	556287	Stihl®	
		16"	A074	163PXBA074	22BPX062E	62	561604	Stihl®	
			D025	163SFGD025	22BPX067E	67	561608	Stihl®	
		18"	D025	183SFGD025	22BPX074E	74	561659	Stihl®	
3/8"	1,5mm .58"	15"		158SFHD009	73DPX056E	56	556286	Dolmar, Efco®, Husqvarna®, Jonsered®, Partner, Solo®, Shindaiwa	4
		18"	D009	188SFHD009	73DPX068E	68	556288	Dolmar, Efco®, Husqvarna®, Jonsered®, Partner, Solo®, Shindaiwa	
		20"		208SFHD009	73DPX072E	72	556431	Dolmar, Efco®, Husqvarna®, Jonsered®, Partner, Solo®, Shindaiwa	
	1,6mm .63"	16"		163SFHD025	75DPX060E	60	567293	Stihl®	
		18"	D025	183SFHD025	75DPX066E	66	567292	Stihl®	
		20"		203SFHD025	75DPX072E	72	556430	Stihl®	

TWINPACK - 2 CHAINS



						OEM Application	
	1.1mm .43"	AdvanceCut™	90PX	50	564455	Stihl, Efco, Oleo-Mac	3
	1.3mm .50"	VersaCut™	91VXL	40	564268	Dolmar, Echo, Husqvarna, Makita,	
				45	564439	Dolmar, Echo, Husqvarna, Makita, Mc Culloch, Oleo-Mac, Partner	
				50	564440	Stihl	
				52	564441	Husqvarna, Jonsered, Partner	
				56	564443	Dolmar, Echo, Efco, Einhell, Husqvarna, Jonsered, Makita, Mc Culloch	
			57	564444	Bosch, Dolmar, Echo, Efco, Einhell, Makita, Oleo-Mac, Stiga		
	1,3mm .50"	SpeedCut™	95TXL	56	576787	Husqvarna, Jonsered, Stihl, Dolmar, Partner	
				64	576788	Husqvarna, Jonsered, Dolmar, Partner	
	1,5mm .58"	PowerCut™	21LPX	64	564457	Husqvarna, Jonsered, Dolmar, Partner	

BLISTER PACKAGING

We offer a specially adapted range to facilitate self-service in store. This blister range contains the most common chains. All products are marked with a short code which is also stated in the associated application guide. All to make it as easy as possible for the consumer to find the right product for their chainsaw in the store.



Q90SG = 90PX

 ≤ 42 cc



 3/8" LOW PROFILE		 90 : 1,1mm	 Narrow Kerf	 LubriTec™ OILING SYSTEM	 4,5mm	 30°	 55°	 0,64mm
33 	40 	44 	45 	46 	50 			
Q90SG033E A33	Q90SG040E A40	Q90SG044E A44	Q90SG045E A45	Q90SG046E A46	Q90SG050E A50			
52 	56 	57 						
Q90SG052E A52	Q90SG056E A56	Q90SG057E A57						

Q91VG = 91PX

 ≤ 42 cc








 3/8" LOW PROFILE		 91:1,3mm		 4,0mm	 30°	 55°	 0,64mm			
33 		40 		44 		45 		46 		49 
Q91VG033E B33		Q91VG040E B40		Q91VG044E B44		Q91VG045E B45		Q91VG046E B46		Q91VG049E B49
50 		52 		53 		55 		56 		57 
Q91VG050E B50		Q91VG052E B52		Q91VG053E B53		Q91VG055E B55		Q91VG056E B56		Q91VG057E B57
61 		62 								
Q91VG061E B61		Q91VG062E B62								

Q95TXL = 95TXL


 38 → 55 cc



 .325"	 7	 95 : 1,3 mm	 Narrow Kerf	 LubriTec™ OILING SYSTEM	 4,8 mm	 30°	 55°	 0,64 mm
56 		64 		66 		72 		78 
Q95TXL056E D56		Q95TXL064E D64		Q95TXL066E D66		Q95TXL072E D72		Q95TXL078E D78

Q20-21-22BP = 20-21-22 BPX 38 → 62 cc




.325"	7	 20 : 1,3 mm	LubriTec™ OILING SYSTEM	 4,8 mm	 30°	 55°	 0,64 mm
--------------	----------	---	-----------------------------------	--	---	---	---

66 

72 

Q20BP066E **E66**

Q20BP072E **E72**

.325"	7	 21 : 1,5 mm	LubriTec™ OILING SYSTEM	 4,8 mm	 30°	 55°	 0,64 mm
--------------	----------	---	-----------------------------------	--	---	---	---

56 

64 

66 

72 

78 


Q21BP056E **F56**

Q21BP064E **F64**

Q21BP066E **F66**

Q21BP072E **F72**

Q21BP078E **F78**

.325"	7	 22 : 1,6 mm	LubriTec™ OILING SYSTEM	 4,8 mm	 30°	 55°	 0,64 mm
--------------	----------	---	-----------------------------------	--	---	---	---

62 

67 

68 

74 

Q22BP062E **G62**


Q22BP067E **G67**

Q22BP068E **G68**

Q22BP074E **G74**

Q73-75DP = 73-75 DPX 38 → 62 cc




3/8"	7	 73 : 1,5 mm	LubriTec™ OILING SYSTEM	 5,5 mm	 30°	 55°	 0,64 mm
-------------	----------	---	-----------------------------------	--	---	---	---

68 

72 

Q73DP068E **L68**

Q73DP072E **L72**

3/8"	7	 75 : 1,6 mm	LubriTec™ OILING SYSTEM	 5,5 mm	 30°	 55°	 0,64 mm
-------------	----------	---	-----------------------------------	--	---	---	---

60 

66 

72 

Q75DP060E **M60**

Q75DP066E **M66**

Q75DP072E **M72**



OREGON®

SPUR AND POWER MATE® RIM SPROCKETS



Choose the right Sprocket

		 .043" 1,1mm				 .050" 1,3mm				 .058" 1,5mm				 .063" 1,6mm			
		3/8"	.325"	1/4"	3/8"	.325"	3/8"	.325"	3/8"	.404"	.325"	3/8"	.404"				
Spur Sprockets  Electric or gas		90			91	95	20	72	21	73	58	22	75	59	27		
NEW SpeedCut™ Nano  		80															
Power Mate® Rim Sprocket Systems  ≥ 38 cc						95	20	72	21	73	58	22	75	59	27		

NEW

SpeedCut™ Nano sprocket

SpeedCut Nano sprockets, 80TXL saw chain and TXLN guide bars work together as a system to optimized performance on battery-powered and small gas chainsaws.

Economical with good wear resistance

A one-piece design that must be replaced as a complete unit


Replacement schedule: every two chain loops

 20 → 38 cc

.325"
LOW PROFILE



Stihl	 7 Zähne	Husqvarna	 7 Zähne	Echo	 7 Zähne
MS 150, MS 150 T MS 151, MS 151 T	610727N	T435	610729N	CCS-58V	629320
MSA 161T	625333N	T525	627943	CS-2511TES	629318
MS 170, MS 171 MS 180, MS 181	610726N	535i XP, T535i XP, 536Li XP, T536Li XP 540i XP, T540i XP,	610730N	CS-303T, CS-362WES, CS-362TES	629322
MS 192, MS 192 T MS 193, MS 193 T MS 194, MS 194 T MS 200, MS 200 T MS 201, MS 201 T	610725N	T540 XP, T540 XP II	610728N		

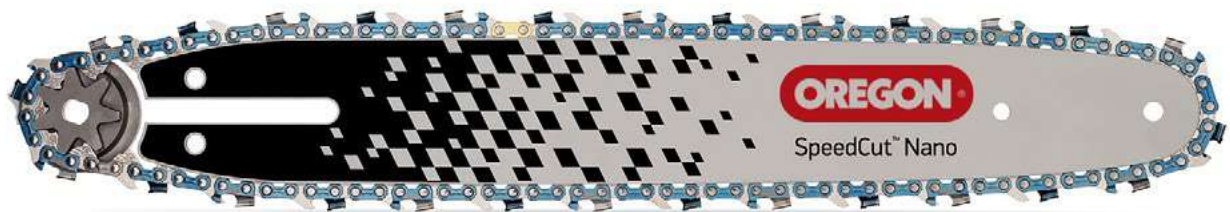


Spur[®] sprocket

Superior performance and value for users who prefer a spur sprocket.

- Rugged and dependable, with excellent wear resistance.
- A one-piece design that must be replaced as a complete unit
- Replacement schedule:
Every two chain loops



3/8" LOW PROFILE	.325"	3/8"	.404"
 Electric or gas ≤ 42 cc	 ≥ 38cc	 ≥ 38cc	 ≥ 38cc
6 Tooth	7 Tooth	7 Tooth	7 Tooth
			
100962X 106114	108308X	38145X	32669X

Attention Dealers

Some Oregon spur sprockets have bearings installed, but some do not. Part numbers ending with a number have bearings installed. Part numbers ending with the letter "X" do not. Bearings must be purchased separately for all part numbers that end with an X.

Power Mate® Rim Sprocket System ≥ 38 cc

This two-piece sprocket system is the ultimate way to drive the chain on most types of saws and can be used by all types of chainsaw users.

- The complete sprocket system includes a clutch drum with spline and a replaceable rim sprocket.
- The rim floats freely on the spline, maximizing chain-bar groove alignment for reduced wear and extended operational life.
- The rim is replaceable which extends the life of the entire system and reduces overall costs.
- The system provides smoother cutting and less chain jumping and wear.
- Power Mate splines have either small (SM7) or standard (SD7) diameter.



SMALL 7 SPLINE (SM7)



STANDARD 7 SPLINE (SD7)

.325"		3/8"	
7 Tooth		7 Tooth	
29175X		34162X	
41726X		513470X	
100791X			
100961X			
108215X			

3/8"		.404"	
7 Tooth		7 Tooth	
26831		10612X	
38470X			

Attention Dealers

Some Oregon® Power Mate systems have bearings installed, but some do not. Part numbers ending with a number have bearings installed. Part numbers ending with the letter "X" do not. Bearings must be purchased separately for all rim systems having part numbers that end with an X.

Power Mate® Rims

The free floating rim produces the best cutting action in a smooth continuous flow.

- The rim wall supports the chain, greatly diminishing the wear and stress on the chain. Smoother cutting and less chain wear than spur sprockets
- Radial port design uses centrifugal force to throw off sawdust and debris
- Wear-depth indicators show when it's time to replace the rim
- Replacement schedule: every two chain loops



SMALL 7 SPLINE (SM7)

.325"	.325"	3/8"
7 Tooth Radial port Wear-Depth Indicators	8 Tooth Wear-Depth Indicators	7 Tooth Wear-Depth Indicators
		

STANDARD 7 SPLINE (SD7)

.325"	3/8"	3/8"	.404"
9 Tooth	7 Tooth Radial Port Wear-Depth Indicators	8 Tooth Wear-Depth Indicators	7 Tooth Radial Port Wear-Depth Indicators
			

Sprocket Additional Components



Bearings



Dust Covers /
Oil Pump Drivers



Washers

Sprocket Type	Pitch – Drive Teeth	Sprocket	Bearing	Additional Components
SPUR® SPROCKET	3/8" – 6	546622 (CS250/CS300)		
	3/8" (90) – 7	571043 (PS250)		
	3/8" (91) – 6	106114	37325	
		570964 (CS1400/CS1500)		
		100962X	37325	
	.325" – 7	108308X	11893	
	3/8" – 7	38145X	37325	
	.404" – 7	32669X	37825	
POWER MATE® SM7	.325" – 7	29175X	11893	
		41726X	37325	
		100791X	37325	
		100961X	37325	
		108215X	11893	
	3/8" – 7	34162X	37325	
		513470X	11893	
POWER MATE® SD7	3/8" – 7	26831	11893	26908 Washer 25047 Dust Cover
		38470X	37504	
	.404" – 7	10612X	37825	

For Sprockets Applications by saw models, refer to OregonProducts.com




**DESIGNED &
ENGINEERED
IN THE USA**

OREGON®

TECHNICAL INFORMATIONS

AdvanceCut™ HD

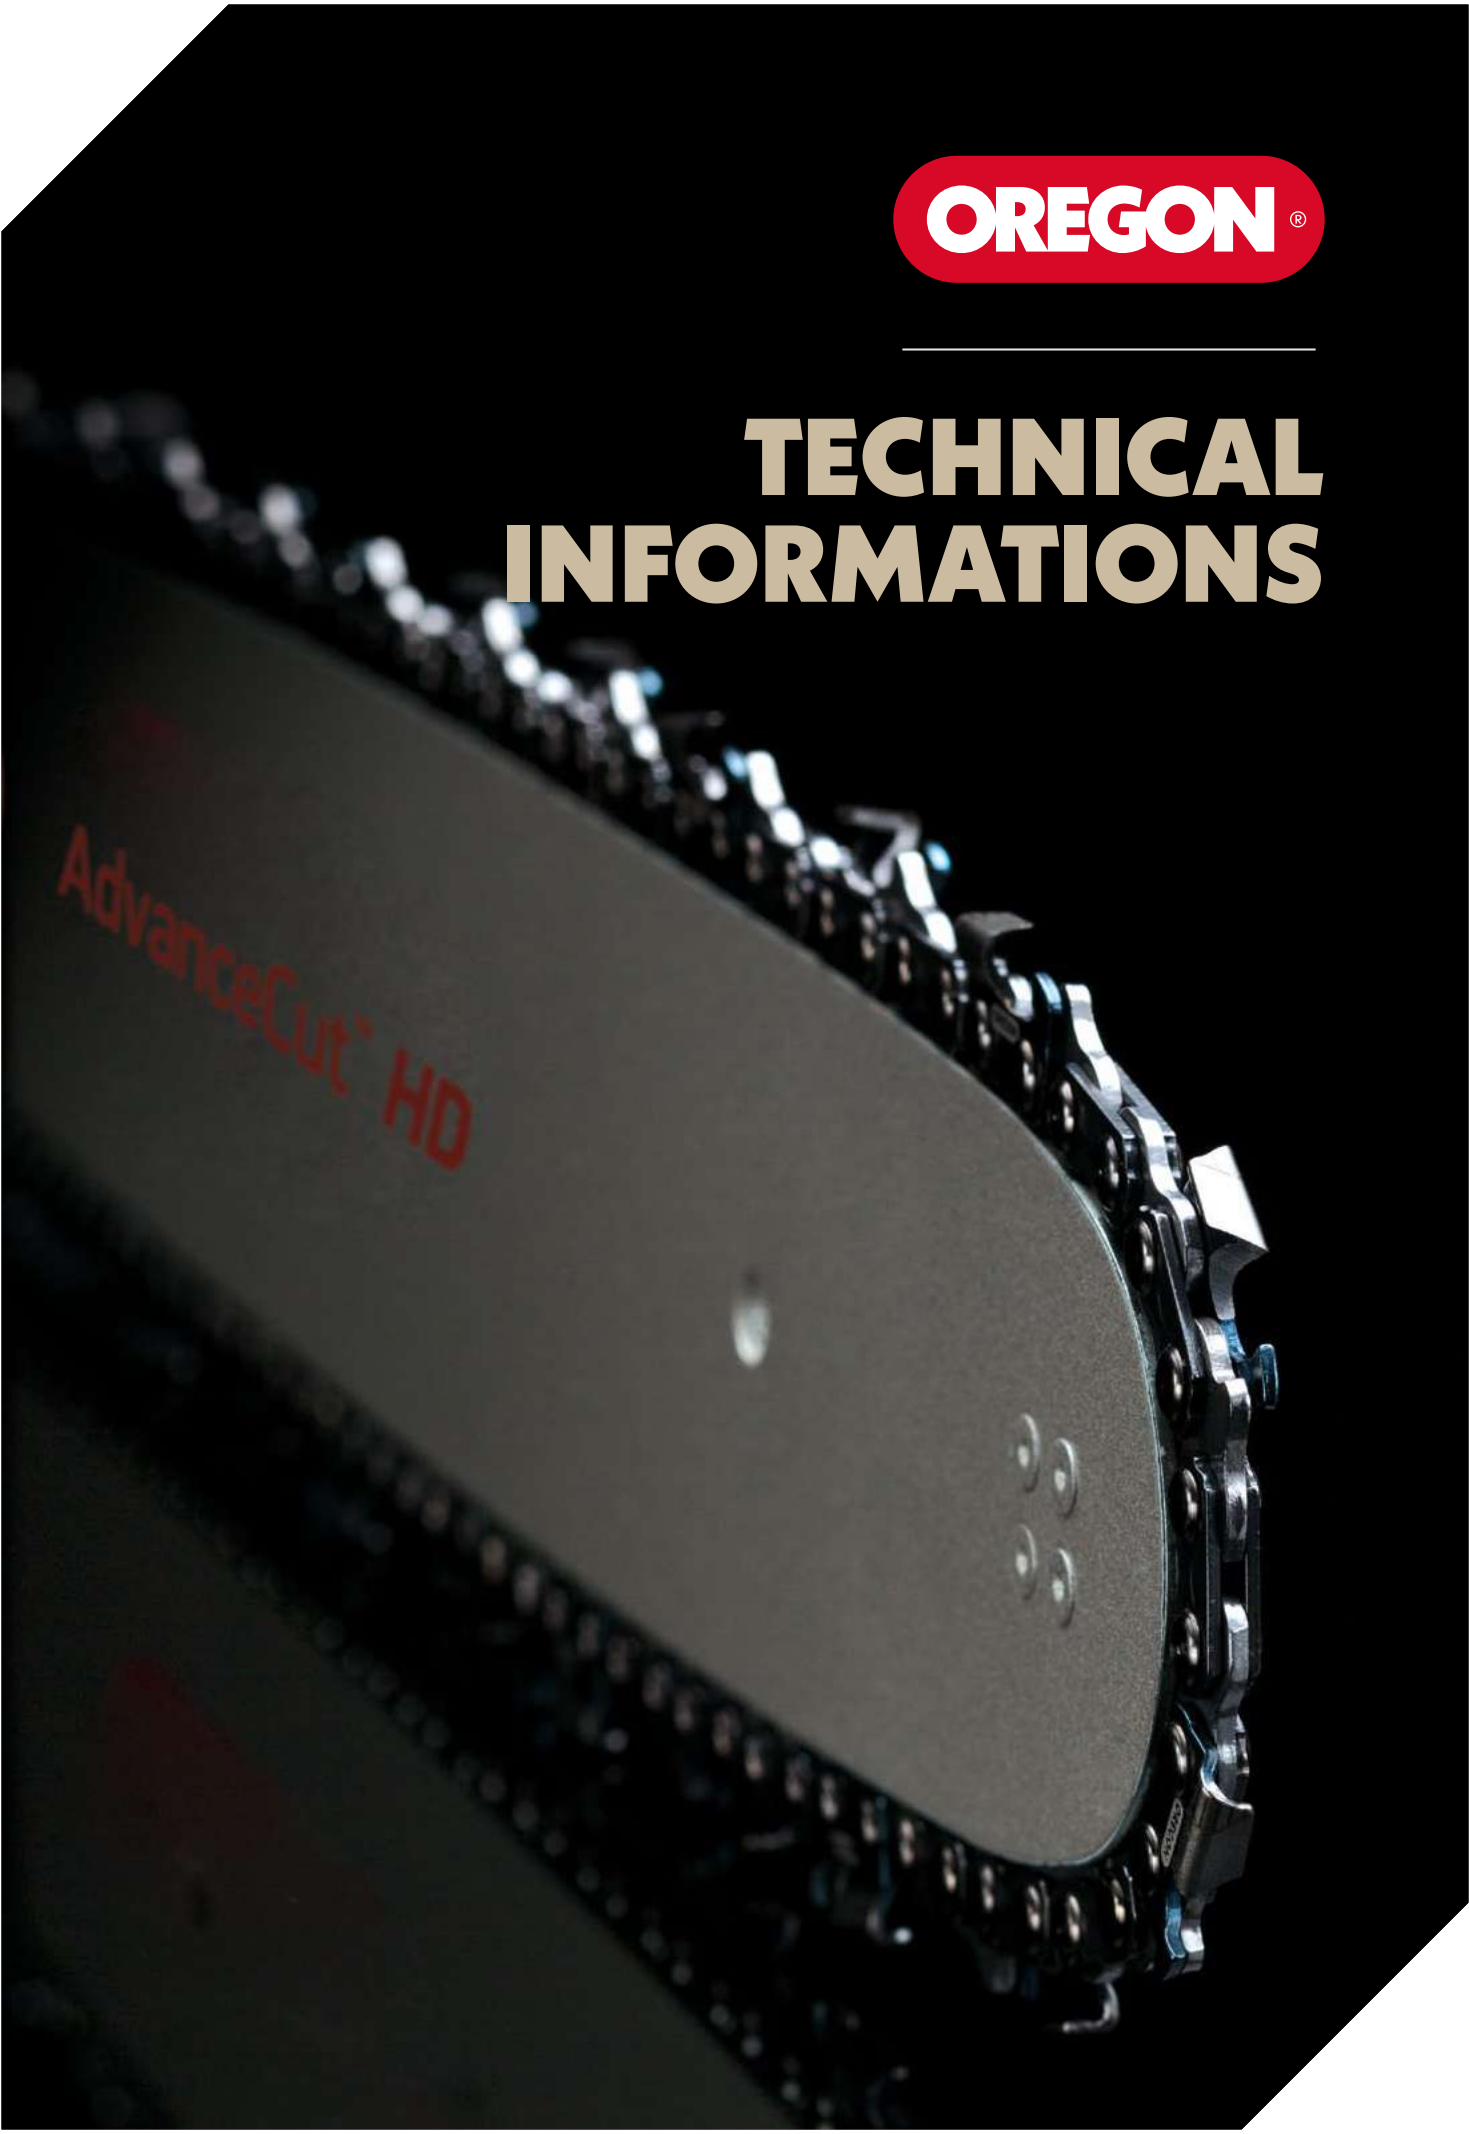A close-up, low-angle shot of an Oregon chainsaw bar and chain. The bar is dark grey with a single mounting hole and four smaller holes near the tip. The chain is silver and features a double-flute design. The text "AdvanceCut™ HD" is printed in red on the bar. The background is black, and the image is framed by a black border with diagonal cut corners.

SAW CHAIN TROUBLESHOOTING GUIDE

OREGON®

TECHNICAL INFORMATION

FOUR COMMON CAUSES OF CHAIN FAILURE


- Incorrect filing
- Lack of lubrication
- Loose chain tension
- Contact with dirt

CUTTER IDENTIFICATION

- 1 Top Plate
- 2 Hook, Cutting Corner
- 3 Side Plate
- 4 Gullet
- 5 Depth Gauge
- 6 Heel
- 7 Rivet Hole
- 8 Toe


SHARPENED CUTTERS HAVE:

- 1 Correct angle on top plate (degree of angle depends on chain type)
Razor-edge on top plate (no light should reflect from this edge)
- 2 Slightly protruding "hook" or point (curve on non-chisel chain)
- 3 Razor-edge (with no nicks) on side plate
- 5 Top of depth gauge at correct height below top plate
Front of depth gauge rounded off

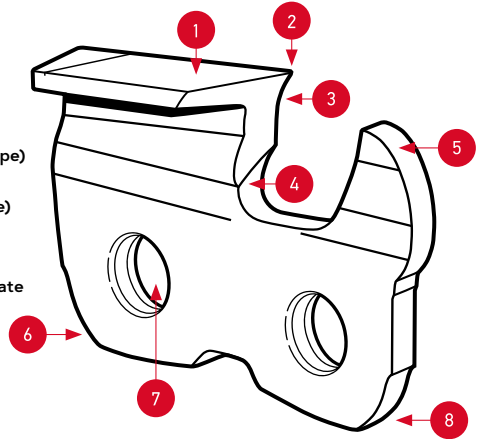

FILING ERRORS


BACKSLOPE ON SIDE PLATE CUTTING EDGE - CUTTER WON'T FEED INTO WOOD OR CUTTING TOO SLOW



Cause: File held too high or too large. Too large grinding wheel or not grinding deep enough.

Solution: Refile cutters to recommended angle using the correct file and filing guide or the right size, properly dressed grinding wheel.


TO MUCH HOOK IN SIDE PLATE CUTTING EDGE - CUTTERS GRAB, CUT ROUGH. CUTTERS DULLS QUICKLY OR WON'T HOLD CUTTING EDGE. TOP PLATE BREAKAGE AND/OR SAW CHAIN STRETCH.



Cause: File held too low or file is too small. Wheel is grinding too deep or is too small.

Solution: Refile to recommended angle with right size file or wheel, properly dressed.


FLAT TOP PLATE CUTTING ANGLE - CHAIN WON'T FEED INTO WOOD, WON'T CUT



Cause: File handle held too high or is too large. Incorrectly sized, dressed and/or positioned Grinding wheel.

Solution: Refile properly at recommended angle


TOO-THIN TOP PLATE CAUSES RAPID DULLING. CUTS FAST FOR A SHORT TIME, THEN DULLS. POOR STAY SHARP.



Cause: File handle held too low

Solution: Refile properly, at recommended angle


TOP PLATE FILING ANGLE LESS THAN RECOMMENDED - SLOW CUTTING, EXCESS WEAR ON CHAIN AND BAR. REQUIRES EXTRA EFFORT TO CUT. POSSIBLE BINDING IN CUT.



Cause: File held at less than recommended top plate filing angle

Solution: Refile at correct angle

TOP PLATE FILING ANGLE MORE THAN RECOMMENDED - SIDE PLATE CUTTING EDGE IS THIN AND DULLS RAPIDLY




Cause: File held at more than recommended angle

Solution: Refile at correct angle

DRIVE LINK WEAR

TANGS WORN STRAIGHT OR CONCAVE

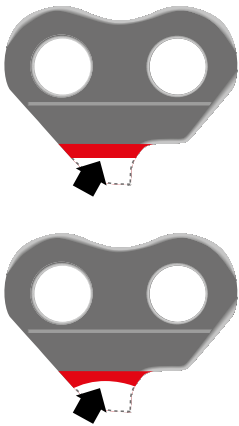


Cause : Straight bottoms are due to shallow guide bar body groove. Concave bottoms are due to shallow guide bar nose groove.

Solution : Regroove bar. Bar may need replacing

Replace saw chain if too worn.

Note : Applies to DuraCut™ bars only. Tendency to throw saw chain from bar. Drive links can't clean guide bar groove.


SCARS ON SIDES



Cause : Loose chain jumping off bar

Solution : Adjust chain tension. Replace bent drive links or replace chain. Refile at correct angle


NICKED BOTTOM OR BACK



Cause : Cutting with loose chain, or wrong pitch sprocket

Solution : Adjust chain tension. Install correct sprocket. File off burrs. Replace damaged drive links or replace chain


FRONT POINT TURNED UP



Cause : Drive links bottoming in sprocket. Sprocket worn

Solution : Replace sprocket. Sharpen tangs. Check for burrs

BATTERED AND BROKEN BOTTOM CHAIN JUMPED BAR



Cause : Chain jumped bar. Spur sprocket hit drive links.

Worn or broken drive sprocket and/or loose chain tension results in damage from revolving drive sprocket.


Solution : Replace damaged drive links, sharpen tangs with round file or replace chain. Remove burrs.

Maintain proper tension to prevent chain from climbing out of spur drive sprocket.

Replace drive sprocket.

FRONT OR BACK PEENED


CAN RESULT IN CHAIN STRETCH AND TIGHT JOINTS.



Cause : Wrong pitch sprocket or worn out drive sprocket or prolonged chain chatter

Solution : Replace sprocket. Adjust chain tension. Chain may be damaged beyond repair


SIDES WORN ROUND AT BOTTOM SAW CHAIN CUTS CROOKEDLY



Cause : Chain wobbled in bar groove. Uneven cutters or worn bar rails

Solution : Rework bar rails and groove. Correct chain filing

EXCESS WEAR ON BOTTOM OF ALL CHAIN PARTS

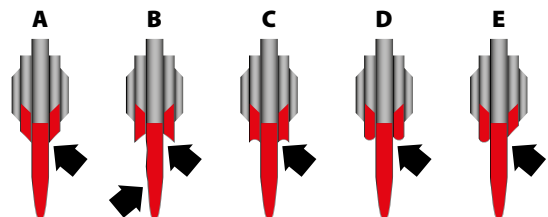

A. Open bar groove **B.** Severe abrasion and wobbly chain on thin bar rails **C.** Rails not flat **D.** Wobbly chain - rails too thick **E.** One rail too thin or soft

Cause : Uneven filing, worn bar rails **Solution :** File chain properly. Recondition bar rails or replace bar. Replace chain if necessary

CUTTER AND TIE STRAP WEAR

EXCESSIVE HEEL WEAR ON CUTTERS AND TIE STRAPS EXCESSIVE CHAIN STRETCH. CHAIN BREAKAGE.



- 1. Causes :** Blunt top plate filing
2. Forcing dull chain to cut
3. Lack of lubrication
4. Low depth gauge settings
5. Forcing chain to cut frozen wood

Solution : File cutters properly. Don't force dull chain to cut. Use oil freely. Replace chain if too damaged


LIGHT DAMAGE ON CUTTING EDGES OF TOP AND/OR SIDE PLATES



Cause : Excessive pressure on dull or misfiled cutters. Common during winter

Solution : File chain correctly. Use oil freely


EDGES BURRED AND NOTCH PEENED ON TIE STRAPS



Cause : Chain chatter due to loose chain tension and improper filing and/or worn out drive sprocket

Solution : Correct chain tension. Refile chain properly. Replace sprocket if badly worn

SEVERE DAMAGE ON EITHER SIDE OF TOP AND/OR SIDE PLATES CHAIN WON'T CUT STRAIGHT IF DAMAGE ON ONE SIDE ONLY. BINDING OR DRIFTING IN CUT.



Cause : Cutters hit abrasive materials.

Contact with material other than wood such as rock, dirt, or sand. This type of damage occurs when cutting close to the ground.

Solution : File cutters to remove all damage

PEENED NOTCH IN TIE STRAP CAUSING TIGHT JOINTS AND BROKEN DRIVE LINKS



Cause : Chain run on badly worn spur sprocket or wrong pitch sprocket

Solution : Replace worn spur sprocket. Chain may need replacing

PEENING ON FRONT CORNER OF CUTTERS AND INTERMEDIATE TIE STRAPS – CAUSES TIGHT JOINTS



Cause : Chain striking bar entry. Sprocket too small or loose chain tension

Solution : Use proper bar and sprocket. Adjust chain tension correctly.

Chains with tight joints cannot be repaired.


PEENING ON BOTTOM OF CUTTERS AND TIE STRAP – CAUSES TIGHT JOINTS



Cause : Loose chain tension. Result of dull cutters and forcing dull chain into wood

Solution : Keep proper tension. Keep cutters sharp. Chain may need replacing

EXCESSIVE WEAR ON BOTTOM OF CUTTERS AND TIE STRAPS



Cause : Depth gauges too high. Cutting edge cannot get into wood

Solution : Lower depth gauges to proper setting. Keep cutters filed correctly


CRACKS UNDER REAR RIVET HOLES ON CUTTERS AND OPPOSING TIE STRAPS



Cause : Excessive pressure on dull or misfiled cutters – common during winter

Solution : File chain correctly. Use oil freely


CONCAVE WEAR ON BOTTOM OF CUTTERS – CONNECTING TIE STRAPS

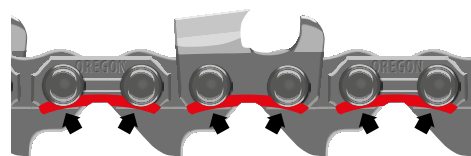

Causes : Chain tension too tight
Normal wear from undercutting (cutting with top of bar)

Solution : Adjust chain tension Reduce cutting with top of bar


BLUNT DEPTH GAUGE CAUSES ROUGH CUTTING



Cause: Uneven filing

Solution: Use correct depth gauge jointer to lower gauges evenly


UNEVEN DEPTH GAUGE HEIGHT. CHAIN WON'T CUT STRAIGHT.



Cause: Improperly filed depth gauge

Solution: Round off front corner to maintain original shape


TIE-STRAPS OR CUTTERS, BROKEN IN THE CENTER



Cause: Incorrect field assembly of saw chain components.

Solution: Replace broken components.


BOTTOMS OF TIE-STRAPS AND CUTTERS WORN OUT OF SQUARE.



Cause: Worn guide bar rails.

Solution: Dress the tops of the guide bar's rails square. If wear is minor, file the bottoms of tie-straps and cutters square. If wear is extensive, replace the saw chain.

DAMAGE TO CUTTERS ON ONE SIDE OF SAW CHAIN

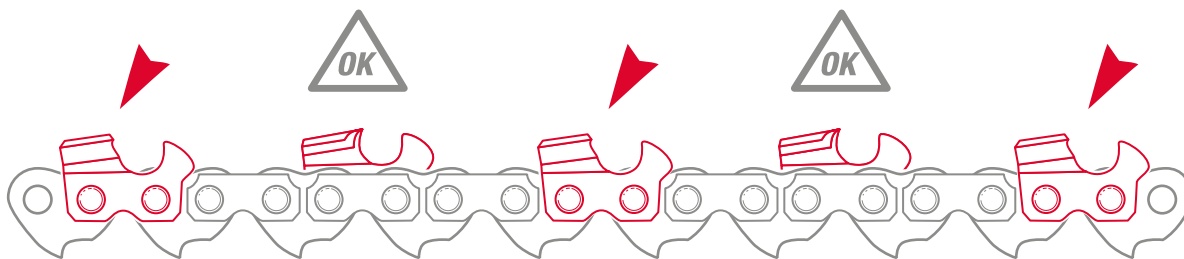


Symptoms: Guide bar and saw chain bind in the cut. Could result in guide bar and saw chain breakage when removing the guide bar from tree. Uneven guide bar rail wear.

Cause: Cutters on one side of saw chain are damaged by hitting the saw box or ground/debris.

Solution: File cutters back enough to remove all damage. Square up guide bar rails if uneven.

DIFFERENT CUTTER TOP-PLATE LENGTHS

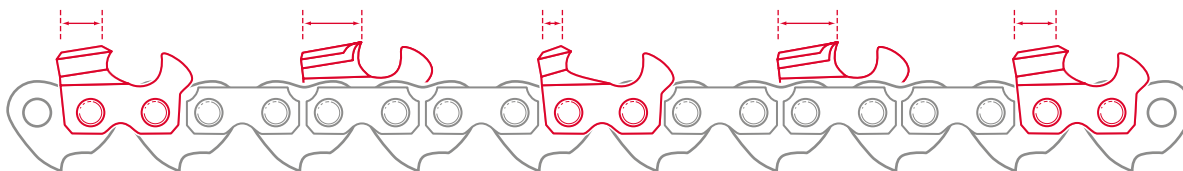

Symptoms: Guide bar and saw chain bind in the cut. Could result in guide bar and saw chain breakage when removing the guide bar from tree. Uneven guide bar rail wear.

Cause: Inconsistent sharpening.

Solution: File cutters back to even cutter top-plate lengths. Square up guide bar rails if uneven.


GUIDE BAR TROUBLESHOOTING GUIDE

OREGON®


TECHNICAL INFORMATIONS

GUIDE BAR TERMS

- 1 Guide bar body
- 2 Guide bar tail
- 3 Saw chain lead-in
- 4 Rails
- 5 Groove
- 6 Saw chain lubrication hole –
A: standard b: LubriTec™
- 7 Adjustment hole
- 8 Nose attachment rivet holes
- 9 Nose sprocket grease hole
- 10 Nose sprocket
- 11 Nose rivets

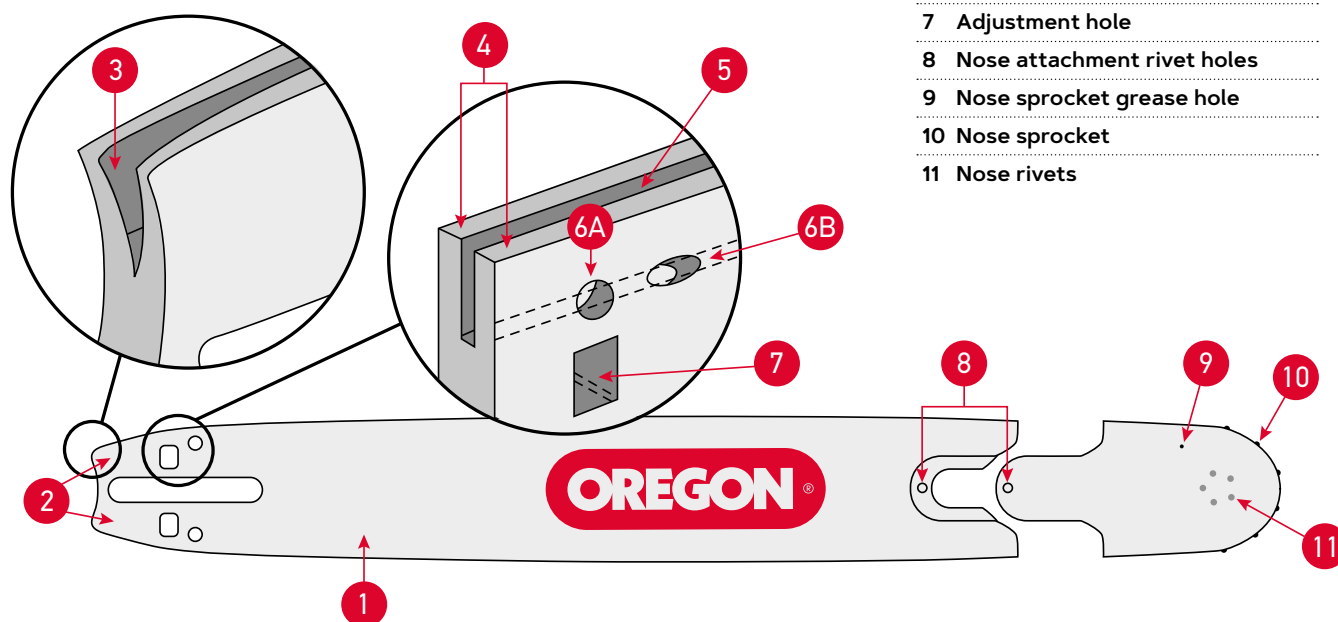


BASIC GUIDE BAR MAINTENANCE TASKS




CHAIN TENSION

Inspect before use and after every hour of use.



BAR CLEANING

Clean bar channel (1), oil hole (2), and grease hole (3), daily.




CHECK FOR DAMAGE

Inspect bar for damage and component wear daily and before each use. Replace as needed.



CHAIN AND BAR OIL

Inspect before use and after every hour of use. For gas saws, add oil when you refuel. For electric saws, check intermittently.




BAR NOSE GREASE

Turn nose sprocket while pumping grease until whole sprocket has new grease. Do not push dirt into hole. Clean grease hole before adding new grease.




WEAR EQUALIZATION

Turn your guide bar over weekly to equalize bar wear.

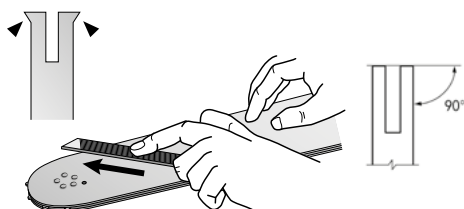


FILE BAR EDGE

File bar edge to 90° with a flat file weekly.

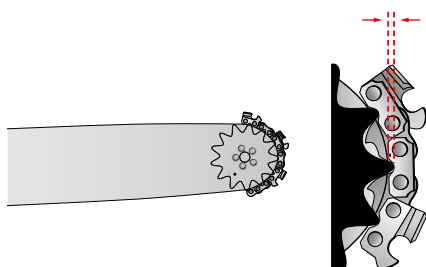

BAR TIP CLEARANCE

On sprocket nose bars, check for clearance around the bar tip between top of rails and the bottom of cutters or tie straps weekly. Replace nose sprockets before cutters or tie straps contact the bar rails.

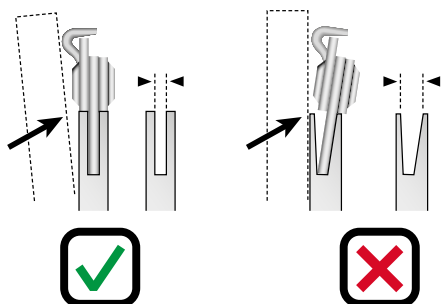

CHAIN LEAN


With chain on the bar, hold a straightedge against the bar body and against a cutter side plate. A good groove will hold the chain straight, leaving a small gap between the straight edge and bar body. A worn groove will let the chain lean until straightedge is flush with bar body. Replace bar if groove is worn. Check weekly.

GUIDE BAR TROUBLESHOOTING

OREGON®

TECHNICAL INFORMATIONS

GUIDE BAR RAIL CONDITIONS

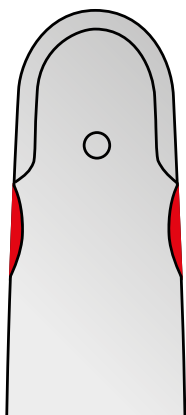


1. CHIPPED RAIL

Symptoms : Material chipping out of one or both rails behind the hard tip.

Cause : Chipping of rails behind hard tip. Continual pressure of bar on one area. Dull chain. Loose bar tension.

Remedy : Flip bar to reduce wear. Replace bar. (This chipping can cause chain damage)




4. WIRE EDGE BAR RAIL

Symptoms : Rail edges may chip if wire edge is not removed.

Cause : Normal wear caused by pressure of chain on edges of bar rails.

Remedy : Use a flat file on edge of bar rail to remove wire edge.




2. THIN RAIL AND LOW RAIL

Symptoms : Thin rail on one or both sides of bar. Rail could be blue color in thin area.

Cause : Chain leaning over, cutting crooked. Forcing dull chain to cut. Damage to cutters on one side of chain.

Remedy : Bar cannot be repaired if rail is thin and uneven. Replace it. Make sure chain doesn't continue to lean. If it does, replace with a new chain.




5. SPREAD RAILS (HARVESTER)

Symptoms : Guide bar will not enter log during cut or cannot make complete cut.

Cause : Saw chain was struck broadside or pushed sideways.

Remedy : 1. Hammer rails together with drive link in groove as spacer. Adjust saw return to allow guide bar to go further into saw box. Sharpen delimbing knives. Avoid moving tree/log when guide bar and saw chain are out of saw box.

2. Reduce guide bar feed speed.




3. WORN BAR RAILS

Symptoms : Shallow groove.

Cause : Worn bar rails are normal for a bar that has been in service for a period of time.

Remedy : Replace bar.

GUIDE BAR NOSE CONDITIONS

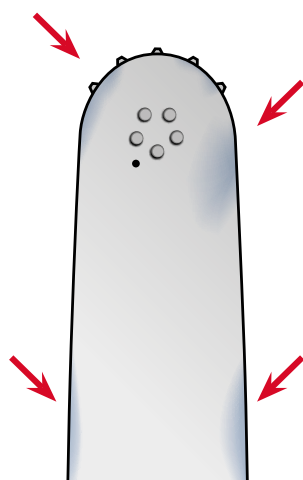


6. BLUE DISCOLORATION ON BAR NOSE

Symptoms : Entire edge turns blue or only in one or two spots. Rails wear quickly. Saw chain drive link damage.

Cause : Nose was pinched. Friction from revolving sprocket caused heat and area turned blue. Could be lack of lubrication.

Remedy : Replace guide bar and saw chain.

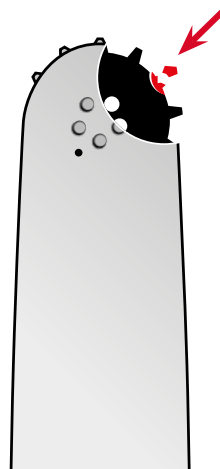


9. SECTION BROKEN OUT OF SPROCKET

Symptoms : Open nose. Broken sprocket. Bearings fall out. One or two broken teeth.

Cause : Irregular operating condition which forced drive link sideways. Throwing the chain when limbing. Chain tension run too loose.

Remedy : Replace bar nose assembly.




7. SPREAD NOSE RAILS AND BEARING LOSS

Symptoms : Spread nose rails and loss of bearings. Sprocket breakage.

Cause : Chain jumped off bar. Carving with nose. Limb caught nose. Twisting nose. Any operating accident.

Remedy : Replace bar or replace nose of RSN bar. Replace sprocket components. Keep guide bar nose away from objects not intended for cutting.

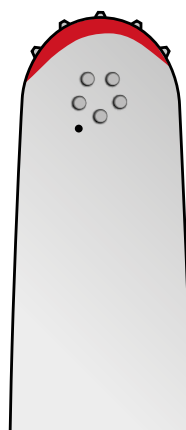


10. NOSE BURNED AT TIP (HARVESTER)

Symptoms : Nose breakage from bearings wearing quickly and jamming.

Cause : High saw chain tension from automatic saw chain tensioners.

Remedy : Decrease the tension applied by automatic saw chain tensioner.

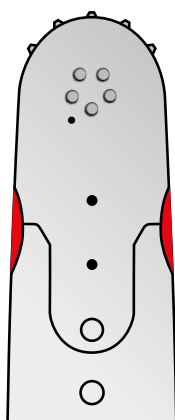


8. CHIPPING AT NOSE CONNECTION (REPLACEABLE NOSE)

Symptoms : Chipping at connection of both body and nose assembly.

Cause : Loose chain tension. Continual pressure in this area. Heavy limbing at this point.

Remedy : Replace nose assembly and dress rail of bar and nose to match.

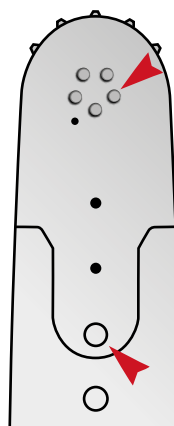

11. LOOSE OR MISSING NOSE/ATTACHMENT RIVETS

Symptoms : Rivets continue to loosen until laminates spread and bearings are lost.

Cause : Guide bar tip flexing during operation from difficulty cutting or accidents.


Remedy : Check rivets every 100 machine hours. Re-hammer loose rivets and replace rivets if rivet head is missing. Always use new rivets.

SPROCKETS TROUBLESHOOTING GUIDE


OREGON®

TECHNICAL INFORMATIONS

SPUR SPROCKET



POWER MATE® RIM SPROCKET

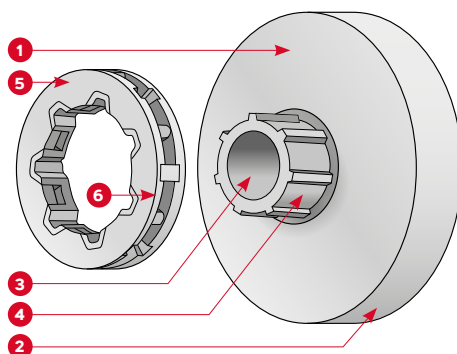

DRIVE SPROCKET TERMS

1 CLUTCH DRUM

2 CLUTCH SKIRT

3 BORE

4 SPLINE HUB/ADAPTER

5 RIM SPROCKET

6 WEAR DEPTH INDICATOR

REPLACEMENT




Replace drive sprocket for the life cycle of every two saw chains, or sooner.

BASIC SPROCKET MAINTENANCE TASKS


RIMS AND SPUR SPROCKET

Visually inspect before use and daily.




POWER MATE SPROCKET

Visually inspect daily and before use.



BAR AND CHAIN OIL

Fill before use. For gas saws, add oil when you refuel. For electric saws, check intermittently.

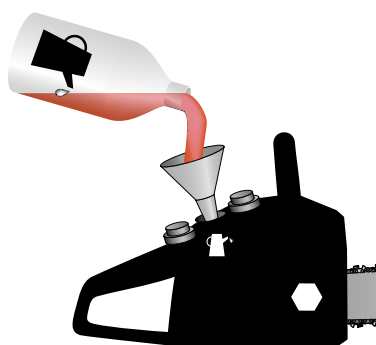


SPROCKET GREASE & MAINTENANCE

Apply clean lithium-based grease to the clutch drum's bearings each time the drive sprocket is removed or weekly.

Do not run old saw chain on a new drive sprocket, or a new saw chain on an old drive sprocket. Use two new saw chains in rotation with each new drive sprocket so all can wear together.

Clean any build-up of sap or debris from splined hub so rim drive sprocket can float freely.

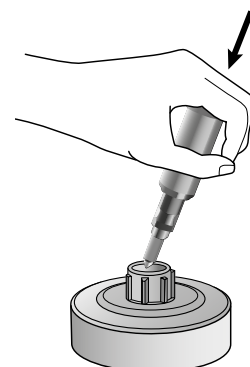


SPROCKET TROUBLESHOOTING

TYPICAL DRUM STRESS


Symptoms : Check daily for cracks, splits, or excessive wear in the sprocket clutch drum.

Remedy : If the drum is cracked, split, broken or shows excessive wear as illustrated below, replace the drum immediately with a new one.


Broken/cracked skirt




Cracked oil pump lug



Worn inner diameter



Worn clutch, worn inner diameter




RIM AND SPUR SPROCKET DAMAGE

SPUR SPROCKET DAMAGE

Cause : This condition can occur when cutting chain drive links wear through the case-hardened spur teeth.

Symptoms : Cutting chain can be ruined by damaged spurs.

Remedy : If spur sprocket teeth look like this replace immediately.




CHAIN BRAKE STRESS



Symptoms : An overly tightened strap around the drum will cause the strap to rub against the clutch drum which will overheat and soften the metal causing potential drum failure.

Remedy : Always check the brake to make sure it stops the rotating chain when activated. Make certain that the brake strap around the drum is not too tight. Regularly inspect drum, adaptor spline and rim. Replace immediately if damaged. Spline wear / Adapter damage

Skirt Wear/Brake Band



Worn Rim and Adaptor Spline




RIM DAMAGE

Cause : Wear can occur under normal conditions. However, check for excessive rim wear and look for wear on outer diameter.


Symptoms : The reduction in diameter can also allow chain drive links to damage the sprocket adaptor.

Remedy : Replace the rim after two chains and inspect rim regularly. Oregon rim incorporates wear-depth indicators which helps identify when it's time to replace the rim.



SEVERE RIM DAMAGE

Do not fit cutting chain to rims that are severely worn. Serious chain damage will result and the rim may break.





75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged. Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents. Engineering is the bedrock of our reputation.



PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS.

DREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2024 - AD100-001-EN



Discover more of our products at
OregonProducts.com

OREGON[®]

APPLICATION GUIDE

AG_1.1
EN/EUR



							
	CM	INCH	INCH	MM	NARROW KERF		#
ACTIVE							
M.T.P. 2.8 SR	20	8	1/4	1,3		25AP	48
	25	10	1/4	1,3		25AP	60
28.28, 39.39, 40.40, MT39, MT40	25	10	3/8	1,3		91P - 91PX - 91VXL	40
	30	12	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	45
	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	52
	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	56
	51.51 *	33	13	.325	1,3		95TXL
* Pitch and gauge may vary	38	15	.325	1,3		95TXL	64
	40	16	.325	1,3		95TXL	66
	45	18	.325	1,3		95TXL	72
51.51 *, 56.56 *, 62.62 *, MT51 *, MT56 *, MT62 *	33	13	.325	1,5		21BPX - 21LPX - 21LGX	56
	38	15	.325	1,5		21BPX - 21LPX - 21LGX	64
* Pitch and gauge may vary	40	16	.325	1,5		21BPX - 21LPX - 21LGX	66
	45	18	.325	1,5		21BPX - 21LPX - 21LGX	72
51.51 *, 56.56 *, 62.62 *, MT51 *, MT56 *, MT62 *	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	68
	50	20	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	72
* Pitch and gauge may vary							
ALPINA							
APR 25 C, APR 527 C	25	10	1/4	1,3		25AP	60
ACS 531 C	30	12	1/4	1,3		25AP	64
AMT 20 Li Kit, AMT 26, AMT 48 Li Kit, APR 25, APR 527, A 2500, C25, MT 2148 Li	20	8	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	33
	25	10	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	40
ACS 40 Li, APR 48 Li	30	12	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	45
ACS 180 E	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	52
ACS 1.8 E, ACS 2.0 ET, ACS 2.2 ET, EA 1800, EA 2000 Q	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	52
	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	57
ACS 200 ET	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	56
A 3700, A 4000, ACS 38, ACS 531, ACS 538	30	12	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	45
	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	53
	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	57
ACS 41, ACS 41 T, ACS 542	33	13	.325	1,3		95TXL	56
	38	15	.325	1,3		95TXL	64
	40	16	.325	1,3		95TXL	66
A 4500, ACS 46, ACS 50, ACS 546, ACS 552	33	13	.325	1,5		21BPX - 21LPX - 21LGX	56
	38	15	.325	1,5		21BPX - 21LPX - 21LGX	64
	40	16	.325	1,5		21BPX - 21LPX - 21LGX	66
	45	18	.325	1,5		21BPX - 21LPX - 21LGX	72
BLACK + DECKER							
GKC1000L, GK1000 (Alligator)	15	6	1/4	1,3		25AP	42
GK1817, GKC1817, GPC1800, GPC1820, GPC1820L20, LPP120	20	8	3/8 LOW PROFILE	1,1		90PX	34
	30	12	3/8 LOW PROFILE	1,1		90PX	45
GKC1825LB, GKC1825L20, PP610, PS7525	25	10	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	40

**OREGON**SINGLE RIVET
SDA - SDE - MLEADVANCECUT
SX - SF - PX - MLBADVANCECUT HD
SP - SL - MPCONTROL CUT PXL
SPEEDCUT TXL
VERSACUT VXLPOWERCUT
RNDURACUT
AT

A318

A318

A041 100SDEA041 100SXEA041

A041 120SDEA041 120SXEA041

A041 140SDEA041 140SXEA041

A041 160SDEA041 160SXEA041 160SPEA041

K095 130MLBK095 130TXLBK095

K095 150MLBK095 150MPBK095 150TXLBK095

K095 160MLBK095 160TXLBK095

K095 180MLBK095 180MPBK095 180TXLBK095

K095 138PXBK095 138SLBK095 138PXLBK095

K095 158PXBK095 158SLBK095 158PXLBK095 158RNBK095
158SLGK095 (*) 158VXLGK095 (*)K095 168PXBK095 168SLBK095 168PXLBK095 168RNBK095
168VXLGK095 (*)K095 188PXBK095 188SLBK095 188PXLBK095 188RNBK095
188SFGK095 (*) 188SLGK095 (*) 188VXLGK095 (*)

Z095 188VXLHZ095

K095 208VXLHK095 208RNDK095 208ATMK095

A041 080SDEA041

A041 100SDEA041 100SXEA041

A041 120SDEA041 120SXEA041

A041 140SDEA041 140SXEA041

A041 140SDEA041 140SXEA041

A041 160SDEA041 160SXEA041

A041 160SDEA041 160SXEA041 160SPEA041

A041 120SDEA041 120SXEA041

A041 140SDEA041 140SXEA041

A041 160SDEA041 160SXEA041

K041 130MLBK041

K041 150MLBK041

K041 160MLBK041


K095 138PXBK095 138SLBK095 138PXLBK095

K095 158PXBK095 158SLBK095 158PXLBK095 158RNBK095
158SLGK095 (*) 158VXLGK095 (*)K095 168PXBK095 168SLBK095 168PXLBK095 168RNBK095
168VXLGK095 (*)K095 188PXBK095 188SLBK095 188PXLBK095 188RNBK095
188SFGK095 (*) 188SLGK095 (*) 188VXLGK095 (*)

A041 124MLEA041

A041 100SDEA041 100SXEA041

(*) .325"-12T bar alternative

							
	CM	INCH	INCH	MM	NARROW KERF		
CS30, CS35, DN400, DN401, DN402, DN404, DN412, DN416, GK30, GK35, GK120, GK300, GK310, GK320, GK321, GK322, GK330, GK331, GK425, GK430, GK435, GK440, GK534, GK535, GK540, GK1365, GK1430, GK1435, GK1440, GK1630, GK1630T, GK1635, GK1635TX, GK1635T, GK1640, GK1640T, GK1935, GK1940	30	12	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	44
	35	14	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	49
	40	16	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	56
GK 1635TX-QS	35	14	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	49
CS1835	35	14	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	52
GK1640T	40	16	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	56
BDC20, CS1840, CS2040, GK1940T, GK2240T, GK2240TX	40	16	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	57
CS2245	45	18	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	62
BOSCH							
UniversalChainPole 18, UniversalChain 18	20	8	$\frac{3}{8}$ LOW PROFILE	1,1	 NARROW KERF	90PX	33
AKE30 Li*, AKE30S, AKE30/17S, AKE30/18S, AKE30-19S, AKE35, AKE35S, AKE35/17S, AKE35/18S, AKE35/19, AKE35/19S, AKE35S/19S, AKE36S, AKE40*, AKE40S*, AKE40SDS, AKE40/17S, AKE40/18S, AKE40/19S*, AKE3000*, AKE3500E*, AKE4000*, 35-19S, 40-19S, 40-19PRO, 35 Uni, Universal 35, UniversalChain 35, UniversalChain 40, Akkusäge 30Li	30	12	$\frac{3}{8}$ LOW PROFILE	1,1	 NARROW KERF	90PX	45
	35	14	$\frac{3}{8}$ LOW PROFILE	1,1	 NARROW KERF	90PX	52
	40	16	$\frac{3}{8}$ LOW PROFILE	1,1	 NARROW KERF	90PX	56
* Gauge may vary and be 1.3mm							
1586.7, 1586.8, AKE30B, AKE30Li*, AKE30-19Pro, AKE35-19Pro, AKE35B, AKE40-19Pro, AKE40*, AKE40B, AKE40S*, AKE40-19S*, AKE3000*, AKE3500*, AKE Edition, BKE30, GKE35B, GKE35BC, GKE35BCE, GKE40BC, GKE40BCE	30	12	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	45
	35	14	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	52
	40	16	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	56
PKE25, PKE30B, PKE35B, PKE40B, PKE40	40	16	$\frac{3}{8}$ LOW PROFILE	1,3		on Original Equipment Bar # 1.602.317.012 (307909 & 614912)	57
* Gauge may vary and be 1.1mm						91P - 91PX - 91VXL	
AKE45S	45	18	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	62
DOLMAR							
AS-1212, AS1812, AS1812LG3	16,0	6,5	1/4	1,3		25AP	42
AS1925, AS1925C, AS1925CZ, AS3626, AS-3626 C, PS-222 TH*, PS222THC	25	10	1/4	1,3		25AP	58
* Pitch may vary	25	10	1/4	1,3		25AP	60
AS1925Z, AS1925CZ, AS1925RF, AS1925RT2, AS-3731, AS3835, AS3835Z, AS3935Z, AS4030, ES-2, ES-2A, ES-4 A, ES-4A QS, ES-5 A, ES-5A QS, ES-31A, ES-31, ES-32A QS, ES-33A, ES-34 TLC, ES-36A, ES-37 A, ES-37A QS, ES-38A, ES-39 TLC, ES-40A, ES-41A QS, ES-43 TLC	30	12	$\frac{3}{8}$ LOW PROFILE	1,1	 NARROW KERF	90PX	45
PS-2, PS-3, PS-4, PS-32*, PS-32C*, PS-32 C TLC*, PS-34, PS-36, PS-38A, PS-34*, PS35, PS-45*	30	12	$\frac{3}{8}$ LOW PROFILE	1,1	 NARROW KERF	90PX	46
	35	14	$\frac{3}{8}$ LOW PROFILE	1,1	 NARROW KERF	90PX	52
	40	16	$\frac{3}{8}$ LOW PROFILE	1,1	 NARROW KERF	90PX	56
* Gauge may vary							
Pole Saw EE-150, Pole Saw ME-246-4, PS-CS1 (199930-1)	25	10	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	39
AS3626, AS3626LGE, AS3726, PS220TH, PS221TH, PS222TH*, PS311TB25, PS311TH30	25	10	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	40
* Pitch may vary							

**OREGON**SINGLE RIVET
SDA - SDE - MLEADVANCECUT
SX - SF - PX - MLBADVANCECUT HD
SP - SL - MPCONTROL CUT PXL
SPEEDCUT TXL
VERSACUT VXLPOWERCUT
RNDURACUT
AT

A318 120SDEA318

A318 140SDEA318

A318 160SDEA318 160SXEA318

A041 180SDEA041

A041 084MLEA041

A041 124MLEA041

A041 144MLEA041

A041 164MLEA041

A041 120SDEA041 120SXEA041

A041 140SDEA041 140SXEA041

A041 160SDEA041 160SXEA041 160SPEA041

A041

A041 180SDEA041

A041 100SDAA041

A041

A041 124MLEA041

A041


A041 144MLEA041

A041 164MLEA041


A218 100SDEA218

A041 100SDEA041 100SXEA041

(*) .325"-12T bar alternative

						
100, 100S, 101, 102, 103, 104, 105*, 106, 108*, 275, 285, 290, 295, AS4030ZB, AS4035ZB, ES-3, ES-6 A, ES-6A QS, ES-30, ES-35, ES-40 A, ES-41A QS, ES-42 A, ES-43 TLC, ES-140, ES-151A, ES-152A, ES-152 A QS, ES-153 A, ES-160, ES-161A, ES-162A, ES-162A QS, ES-163A, ES-164 TLC, ES-171A, ES-172A, ES-172A QS, ES-173A, ES-174 TLC, ES-183A, ES-1600, ES-2035A, ES-2035AP, ES-2040A, ES-2130 A, ES-2135A, ES-2135 AP, ES-2136 TLC, ES-2140 A, ES-2140 AP, ES-2141 TLC, ES-2141KTLC, PS-2, PS-32*, PS-32 C*, PS-32 C TLC*, PS32C35*, PS33, PS-34*, PS-34S*, PS-35, PS-35 C, PS-35 C TLC, PS35C35, PS35CTLC35, PS-39, PS-39ES, PS41, PS-41 QS, PS-45*, PS-45 QS, PS-330, PS-330 QS, PS-340, PS-340 QS, PS-341, PS-341 Happy Start, PS-344, PS-350, PS-350 C, PS-350 SC, PS350SC35, PS-352, PS352-35, PS352TLC35, PS-390, PS-390 QS, PS-400, PS-400 QS, PS-401, PS-401 QS Happy Start, PS420SC40, PS-3300TH, PS-3400TH, PS-3410, PS-3410 TH, PS-3410 TH TLC, PS-3410TH30	30	12	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	45
	30	12	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL OE Drive Link # Recommendation	46
	35	14	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	52
	40	16	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	56
	45	18	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	62
* Pitch and gauge may vary						
PS-410, PS-411, PS-420, PS-420 C, PS-420 SC, PS420SC38, PS420SCKIT38	33	13	.325	1,3	 NARROW KERF 95TXL	56
	38	15	.325	1,3	 NARROW KERF 95TXL	64
* Pitch & motor mount may vary	45	18	.325	1,3	 NARROW KERF 95TXL	72
105*, 108*, 110*, 110i, 110iH, 111*, 115*, 115i, ES-1800, PS-460*, PS-500*, PS-500 C*, PS-550*, PS550-38*, PS-4600*, PS-4600S*, PS-4600 SH, PS-4605*, PS-4605 H*, PS-5000*, PS-5000H, PS-5105*, PS-5105 C*, PS-5105 H, PS-5105 CH*, PS-5105CX*, PS-6100*, PS-6100 H	33	13	.325	1,5	21BPX - 21LPX - 21LGX	56
	38	15	.325	1,5	21BPX - 21LPX - 21LGX	64
	40	16	.325	1,5	21BPX - 21LPX - 21LGX	66
* Pitch & motor mount may vary	45	18	.325	1,5	21BPX - 21LPX - 21LGX	72
109, 109 HappyStart, 110*, 111*, 112*, 115*, 115i, 115iH, 115S45, 116, 116 si, 117, 120, 120 si, PS-43, PS-52, PS-460*, PS460-45*, PS-500*, PS-500 C*, PS500C45*, PS-550*, PS550-45*, PS-4600*, PS-4605*, PS4605-45*, PS-5000*, PS-5000 H, PS-5105*, PS-5105 C*, PS-5105 H, PS-5105 CH*, PS5105C4*, PS5105SCKIT45*, PS-6000i, PS-6000iH, PS-6100*, PS6100-45, PS6100-53, PS-6800i, PS-6800iH,	38	15	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	56
	45	18	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	64
* Pitch and motor mount may vary	50	20	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	72

**OREGON****SINGLE RIVET
SDA - SDE - MLE****ADVANCECUT
SX - SF - PX - MLB****ADVANCECUT HD
SP - SL - MP****CONTROL CUT PXL
SPEEDCUT TXL
VERSACUT VXL****POWERCUT
RN****DURACUT
AT****A041 120SDEA041 120SXEA041****A041****A041 140SDEA041 140SXEA041****A041 160SDEA041 160SXEA041 160SPEA041****A041 180SDEA041****K041 130MLBK041****K041 150MLBK041****K041 180MLBK041****K095 138PXBK095 138SLBK095 138PXLBK095****K095 158PXBK095 158SLBK095
158SLGK095 (*) 158PXLBK095
158VXLGK095 (*) 158RNBK095****K095 168PXBK095 168SLBK095 168PXLBK095
168VXLGK095 (*) 168RNBK095****K095 188PXBK095
188SFGK095 (*) 188SLBK095
188SLGK095 (*) 188PXLBK095
188VXLGK095 (*) 188RNBK095****K153 158SLHK153****K153 188SLHK153 188VXLHK153****K153**

					 NARROW KERF		# 
	CM	INCH	INCH	MM			
PS-630, PS-6400, PS-6400 H, PS-7300, PS-7300 H, PS-7310, PS7310-50, PS-7310 H, PS-7900, PS-7900 H, PS-7910, PS7910-53, PS-7910 H, PS7910-60PM	38	15	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	56
	40	16	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	60
	43	17	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	64
	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	68
	50	20	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	72
	60	24	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	80
	60	24	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	84
PS-9000, PS-9010	43	17	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	64
	50	20	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	72
ECHO							
CS-260TESC, CS-270WES, CS-280TES-C, CS-280WES, CS-281WES, CS-351WES, CS-360TES*, CS-361WES*, CS-362TES, CS-362WES*, CS-2510TESC, CS-2511TES-C	25	10	1/4	1,3		25AP	58
	25	10	1/4	1,3		25AP	60
* Pitch may vary	30	12	1/4	1,3		25AP	68
PPF-225**, PPT-280**, PPT-2620HES**	25	10	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	39
** Gauge may vary	30	12	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	44
	30	12	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	45
CS-310ES*, CS-352AC, CS-352ES*, CS-3510AC**, CS-3510ES**, ECCS-58V, DCS58V, DCS-1600	30	12	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	45
	35	14	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	52
* Gauge may vary	40	16	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	56
PPF-225**, PPF-236ES, PPT-265ES, PPT-266, PPT-280**, PPT-300ES, PPT-2620HES**	25	10	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	39
	25	10	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	40
	30	12	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	44
** Gauge may vary	30	12	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	45
CS-260T, CS-260TES, CS-270WES, CS-280T, CS-280TES, CS-281WES, CS-2510TES, CS-2511TES, CS-2511WES, DCS-2500T	25	10	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	40
	30	12	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	45
	30	12	3/8 LOW PROFILE	1,3		on Original Equipment Bar 91P - 91PX - 91VXL	47
CS-285EVL, CS-290EVL, CS-300EVL, CS-302, CS-303, CS-303T, CS-310ES*, , CS-315, CS-320T, CS-320TES, CS-320EVL, CS-328, CS-330EVL, CS-340, CS-341, CS-345, CS-350T, CS-350TES, CS-350WES, CS-351WES, CS-352AC, CS-352ES*, CS-353ES, CS-360TES*, CS-360EVL *, CS-360WES, CS-361WES, CS-362TES, CS-362WES*, CS-370ES*, CS-2400, CS-2600, CS-2800, CS-2900, CS-3000, CS-3050, CS-3400, CS-3450, CS-3500, CS-3510AC*, CS-3510ES*, CS-4400, E155, ECS-150/1850FT, ECS-2000, ECS-3000, ECS-3050,	30	12	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	45
	30	12	3/8 LOW PROFILE	1,3		on Original Equipment Bar 91P - 91PX - 91VXL	47
	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	52
	35	14	3/8 LOW PROFILE	1,3		on Original Equipment Bar 91P - 91PX - 91VXL	53
	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	56
	40	16	3/8 LOW PROFILE	1,3		on Original Equipment Bar 91P - 91PX - 91VXL	57
	40	16	3/8 LOW PROFILE	1,3		on Original Equipment Bar 91P - 91PX - 91VXL	58
CS-390ESX, CS-4200ES	33	13	.325	1,3	 NARROW KERF	95TXL	56
	38	15	.325	1,3	 NARROW KERF	95TXL	64
	40	16	.325	1,3	 NARROW KERF	95TXL	66

**OREGON**SINGLE RIVET
SDA - SDE - MLEADVANCECUT
SX - SF - PX - MLBADVANCECUT HD
SP - SL - MPCONTROL CUT PXL
SPEEDCUT TXL
VERSACUT VXLPOWERCUT
RNDURACUT
AT

D009	158SFHD009	158SLHD009	158VXLHD009	158RNDD009	
D009	168SFHD009		168VXLHD009	168RNDD009	168ATMD009
D009			178VXLHD009	178RNDD009	178ATMD009
D009	188SFHD009	188SLHD009	188VXLHD009	188RNDD009	188ATMD009
D009	208SFHD009	208SLHD009	208VXLHD009	208RNDD009	208ATMD009
D009					
D009	248SFHD009			248RNDD009	248ATMD009
D033					173ATMD033
D033				208RNDD033	

A041 100SDAA041

A041

A041

A041

A041

A041 124MLEA041

A041 124MLEA041

A041 144MLEA041

A041 164MLEA041

A041

A041 100SDEA041 100SXEA041

A041

A041 120SDEA041 120SXEA041

A041 100SDEA041 100SXEA041

A041 120SDEA041 120SXEA041

A041

A041 120SDEA041 120SXEA041

A041

A041 140SDEA041 140SXEA041

A041

A041 160SDEA041 160SXEA041 160SPEA041


A041

A041

K041 130MLBK041


K041 150MLBK041

K041 160MLBK041

							
	CM	INCH	INCH	MM	NARROW KERF		
CS-4510ES-NC	33	13	.325	1,3	 NARROW KERF	95TXL	56
	38	15	.325	1,3	 NARROW KERF	95TXL	64
	45	18	.325	1,3	 NARROW KERF	95TXL	72
CS-360EVL*, CS-370ES*, CS-400EVL, CS-420ES, CS-440EVL, CS-450**, CS-452ESX, CS-490ES, CS-500ES, CS-501SX, CS-510, CS-525, CS-550**, CS-3600, CS-3700, CS-3700ES, CS-3900, CS-4000, CS-4010, CS-4050, CS-4200, CS-4400, CS-4500, CS-4600, CS-4601, CS-4610, CS-5000, CS-5100	33	13	.325	1,5		21BPX - 21LPX - 21LGX	56
	38	15	.325	1,5		21BPX - 21LPX - 21LGX	64
	40	16	.325	1,5		21BPX - 21LPX - 21LGX	66
	45	18	.325	1,5		21BPX - 21LPX - 21LGX	72
	50	20	.325	1,5		21BPX - 21LPX - 21LGX	80
CS-450**, CS-550**, CS-4510ES	33	13	.325	1,5		21BPX - 21LPX - 21LGX	56
** Motor mount may vary by year	38	15	.325	1,5		21BPX - 21LPX - 21LGX	64
	40	16	.325	1,5		21BPX - 21LPX - 21LGX	66
	45	18	.325	1,5		21BPX - 21LPX - 21LGX	72
	50	20	.325	1,5		21BPX - 21LPX - 21LGX	80
	60	24	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	84
CS-590, CS-600, CS-600S, CS-605, CS-610, CS-620SX, CS-621SX, CS-680, CS-680S, CS-7310SX, CS-8002	40	16	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	60
	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	64
	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	68
	50	20	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	72
	60	24	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	84
EFCO							
MTT 2500, MT 2600*	25	10	1/4	1,3		25AP	58
* Pitch may vary	25	10	1/4	1,3		25AP	60
EP 90, EP 100, EP 120, PTX 2700, PTX 2710	25	10	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	39
EF 15E, MTi 30	30	12	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	45
MT 2200 Li-ion, MTT 3600	30	12	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	45
	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	52
MT 2600*	25	10	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	40
* Pitch may vary	25	10	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	40
EF 17E, EF 19E	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	50
	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	57
125, 131, 132, 132 S, 132 SK, 137, 141S, MT 350, MT 350S, MT 371, MTH 400, MTH 402, MT 411*, MT 1800 E, MT 2000 E, MT 3500, MT 3500S, MT 3700, MT 3710*, MTH 4000, MT 4100S, MT 4110*	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	52
	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	53
	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	56
	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	57
* Pitch may vary	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	56
114E, 115, 116E, 117E, 119, 134, 135, 136, 140, 140S	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	57
137 P.S., MT 3700 P.S. (PowerSharp)	40	16	3/8 LOW PROFILE	1,3		POWERSHARP	56
141 SP, MT 411*, MT 440, MT 451, MT 3710*, MT 4100 SP, MT 4110*, MT 4400, MT 4510	33	13	.325	1,3	 NARROW KERF	95TXL	56
	38	15	.325	1,3	 NARROW KERF	95TXL	64
	40	16	.325	1,3	 NARROW KERF	95TXL	66
* Pitch may vary	45	18	.325	1,3	 NARROW KERF	95TXL	72

**OREGON****SINGLE RIVET
SDA - SDE - MLE****ADVANCECUT
SX - SF - PX - MLB****ADVANCECUT HD
SP - SL - MP****CONTROL CUT PXL
SPEEDCUT TXL
VERSACUT VXL****POWERCUT
RN****DURACUT
AT**


K095		130MLBK095		130TXLBK095	
K095		150MLBK095	150MPBK095	150TXLBK095	
K095		180MLBK095	180MPBK095	180TXLBK095	
K041		138PXBK041			
K041		158PXBK041		158PXLBK041	
K041		168PXBK041		168VXLGK041	
K041				188VXLGK041	
K041					
K095		138PXBK095	138SLBK095	138PXLBK095	
K095		158PXBK095	158SLBK095 158SLGK095 (*)	158PXLBK095 158VXLGK095 (*)	158RNBK095
K095		168PXBK095	168SLBK095	168PXLBK095 168VXLGK095 (*)	168RNBK095
K095		188PXBK095 188SF GK095 (*)	188SLBK095 188SLGK095 (*)	188PXLBK095 188VXLGK095 (*)	188RNBK095
K095					
D009		168SFHD009		168VXLHD009	168RNDD009 168ATMD009
D176				188VXLHD176	
D009		188SFHD009	188SLHD009	188VXLHD009	188RNDD009 188ATMD009
D009		208SFHD009	208SLHD009	208VXLHD009	208RNDD009 208ATMD009
D009		248SFHD009			248RNDD009 248ATMD009
A041	100SDAA041				
A041					
A318	104MLEA318				
A041	120SDEA041	120SXEA041			
A041	140SDEA041	140SXEA041			
A041	100SDEA041	100SXEA041			
A041	140SDEA041	140SXEA041			
A041	160SDEA041	160SXEA041			
A041	140SDEA041	140SXEA041			
A041					
A041	160SDEA041	160SXEA041	160SPEA041		
A041					
A129					
A129	160SDEA129				
A041	160SDEA041				
K041		130MLBK041			
K041		150MLBK041			
K041		160MLBK041			
K041		180MLBK041			

							
	CM	INCH	INCH	MM	NARROW KERF		
MTH 510*, MTH 560*, MTH 5100*, MTH 5600*	33	13	.325	1,3	 NARROW KERF	95TXL	56
	38	15	.325	1,3	 NARROW KERF	95TXL	64
* Pitch and/or gauge may vary	40	16	.325	1,3	 NARROW KERF	95TXL	66
	45	18	.325	1,3	 NARROW KERF	95TXL	72
142, 146, 147, 151, 152*, 156*, 162*, 165, MTH 510*, MTH 560*, MTH 5100*, MT 5200, MTH 5600*, MT 6300*	33	13	.325	1,5		21BPX - 21LPX - 21LGX	56
	38	15	.325	1,5		21BPX - 21LPX - 21LGX	64
* Pitch and/or gauge may vary	40	16	.325	1,5		21BPX - 21LPX - 21LGX	66
	45	18	.325	1,5		21BPX - 21LPX - 21LGX	72
	50	20	.325	1,5		21BPX - 21LPX - 21LGX	78
	50	20	.325	1,5		21BPX - 21LPX - 21LGX	80
152*, 156*, 162*, MTH 510*, MTH 560*, MTH 5100*, MTH 5600*, MT 6300*	40	16	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	60
	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	68
* Pitch and/or gauge may vary	50	20	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	72
165 HDS, MT 6500, MT 6510,	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	68
	50	20	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	72
	60	24	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	84
MT 7200, MT 8200	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	68
	50	20	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	72
EGO							
PSA1000	25	10	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	40
CS1400, CS1600, CSX3000	30	12	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	45
	35	14	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	52
	40	16	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	56
CS1800E	45	18	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	62
GREENWORKS							
GD40TCS	25	10	1/4	1,3		25AP	58
Pole Saw 20107	20	8	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	33
GD40CS18, GD40CS40*	40	16	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	56
Gauge may vary and be 1.3mm							
G24PS20, G40PS20, GPS7220	20	8	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	33
G24CS25	25	10	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	40
G24PS20, G40CS30, G40PS20, GCS1840,	25	10	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	40
GCS2046, GD40CS40*, GD60CS40,	30	12	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	45
GD80CS50, GPS7220, 1800W 20027	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	56
* gauge may vary and be 1.1mm	45	18	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	62
HUSQVARNA							
115iPT4, 120iTK4-P, 327PT5S,	25	10	1/4	1,3		25AP	58
525PT5S, 530iP4, 530iPT5,	30	12	1/4	1,3		25AP	64
530iPX, 536LiP4, 536LiPT5, 536LiPX	25	10	1/4	1,3		25AP	60
T525 (Carving)							
535i XP **, 536Li XP, T536Li XP	30	12	1/4	1,3		25AP	68
** Until 2019. Pitch & gauge may vary.							
436Li, 535i XP**, T535i XP**, 536 Li XP,	25	10	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	40
T536Li XP, 120i, 136i	30	12	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	45
** Until 2019. Pitch & gauge may vary.	35	14	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	52

**OREGON**SINGLE RIVET
SDA - SDE - MLEADVANCECUT
SX - SF - PX - MLBADVANCECUT HD
SP - SL - MPCONTROLCUT PXL
SPEEDCUT TXL
VERSACUT VXLPOWERCUT
RNDURACUT
AT

K095		130MLBK095		130TXLBK095	
K095		150MLBK095	150MPBK095	150TXLBK095	
K095		160MLBK095		160TXLBK095	
K095		180MLBK095	180MPBK095	180TXLBK095	
K095		138PXBK095	138SLBK095	138PXLBK095	
K095		158PXBK095	158SLBK095 158SLGK095 (*)	158PXLBK095 158VXLGK095 (*)	158RNBK095
K095		168PXBK095	168SLBK095	168PXLBK095 168VXLGK095 (*)	168RNBK095
K095		188PXBK095 188SFGK095 (*)	188SLBK095 188SLGK095 (*)	188PXLBK095 188VXLGK095 (*)	188RNBK095
K095		208PXBK095		208VXLGK095	208RNBK095
K095					
K095				168VXLHK095	168RNDK095 168ATMK095
K095		188SFHK095	39450		188RNDK095
K095				208VXLHK095	208RNDK095 208ATMK095
D009		188SFHD009	188SLHD009	188VXLHD009	188RNDD009 188ATMD009
D009		208SFHD009	208SLHD009	208VXLHD009	208RNDD009 208ATMD009
D009		248SFHD009			248RNDD009 248ATMD009
D024					
D024		208SFHD024			208ATMD024
A041					
A041	124MLEA041				
A041	144MLEA041				
A041	164MLEA041				
A041	180SDEA041				
A041	100SDAA041				
A041	084MLEA041				
A041	164MLEA041				
A041	080SDEA041				
A041	100SDEA041	100SXEA041			
A041	100SDEA041	100SXEA041			
A041	120SDEA041	120SXEA041			
A041	160SDEA041	160SXEA041	160SPEA041		
A041	180SDEA041				
A318	100SDAA318				
A318					
A095	535044				
A095	535045				
A095					
A095	124MLEA095				
A095					

(*) .325"-12T bar alternative

							
CM	INCH	INCH	MM	NARROW KERF			
323P4*, 325P5X*, 327P4*, 327P5X*, 136Li	30	12	$\frac{3}{8}$ LOW PROFILE	1,1	 NARROW KERF	90PX	45
* Gauge may vary depending on year							
323P4*, 325P5X*, 327P4*, 327P5X*	25	10	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	40
* Gauge may vary depending on year	30	12	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	45
325P4X, T425	20	8	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	32
	25	10	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	40
120, 120 II, 130, 135, 135e, 135 II, 140, 236**, 236e *, 240, 240e *, 315, 315E, 315 EL, 317 (1700W), 317 EL (1700W), 321 (2000W), 321 EL (2000W), 333, 334, 334T, 335XPT, 338XPT, 340i, 418 EL, 420 EL, T435, T525, 525P4S, 525P5S, T540 XP, T540 XP II, 1400 EL, 1600 EL	25	10	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	40
	30	12	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	45
	35	14	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	52
	40	16	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	56
* Until year 2009 (A095)	45	18	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	60
** Chain pitch may vary by year							
E16, 136**, 137**, , 141**, 142**, 235**, 236e *, 240**, 240e *, 243, 250PS, E316, 439	30	12	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	45
	35	14	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	52
	40	16	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	56
* From year 2010 (A041)	45	18	$\frac{3}{8}$ LOW PROFILE	1,3		91P - 91PX - 91VXL	62
** Chain pitch may vary by year							
535i XP**, T535i XP**, 540i XP, T540i XP	25	10	$\frac{3}{25}$ LOW PROFILE	1,1		80TXL	46
** from 2020	30	12	$\frac{3}{25}$ LOW PROFILE	1,1		80TXL	51
	35	14	$\frac{3}{25}$ LOW PROFILE	1,1		80TXL	59
	40	16	$\frac{3}{25}$ LOW PROFILE	1,1		80TXL	64
33, 36, 40, 41, 42, 44, 45, 49, 50, 51, 55, 57, 133, 134, 136**, 137 e-series**, 141**, 142 e-series**, 234, 235**, 236**, 238, 240**, 242, 242 XP, 246, 254 XP, 257, 261, 262, 336, 339XP, 340, 340 e-series, 345, 345 e-series, 346, 346XP/XPG, 350, 351, 353, 357**, 357XP/XPG**, 359**, 360, 362 XP**, 362XPG**, 435, 435e, 435 e-series, 440, 440e, 440 e-series, 444, 445, 445e, 445 e-series, 450, 450e, 450 e-series, 450 II, 450e II, 450 RANCHER, 455 RANCHER, 455e RANCHER, 455 RANCHER II, 455e RANCHER II, 455 e-series RANCHER, 460, 460 RANCHER, 535FBX (clearing saw), 543XP/XPG, 545, 545 MARK II, 550XP/XPG, 550 XP MARK II, 550 XP TrioBrake, 555, 560 XP, EL16, E1400, 1400E, 1500E, E1600, 1600E	33	13	.325	1,3	 NARROW KERF	95TXL	56
	38	15	.325	1,3	 NARROW KERF	95TXL	64
	40	16	.325	1,3	 NARROW KERF	95TXL	66
	45	18	.325	1,3	 NARROW KERF	95TXL	72
	50	20	.325	1,3	 NARROW KERF	95TXL	78
** Chain pitch may vary by year							

** Chain pitch may vary by year

**OREGON****SINGLE RIVET
SDA - SDE - MLE****ADVANCECUT
SX - SF - PX - MLB****ADVANCECUT HD
SP - SL - MP****CONTROL CUT PXL
SPEEDCUT TXL
VERSACUT VXL****POWERCUT
RN****DURACUT
AT****A095 124MLEA095**

A095


A095 120SDEA095 120SXEA095

A041

A041 100SDEA041 100SXEA041


A095

A095 120SDEA095 120SXEA095**A095 140SDEA095 140SXEA095****A095 160SDEA095 160SXEA095****A095 180SDEA095****A041 120SDEA041 120SXEA041****A041 140SDEA041 140SXEA041****A041 160SDEA041 160SXEA041 160SPEA041****A041 180SDEA041****A095 104TXLNA095****A095 124TXLNA095****A095 144TXLNA095****A095 164TXLNA095****K095 130MLBK095 130TXLBK095****K095 150MLBK095 150MPBK095 150TXLBK095****K095 160MLBK095 160TXLBK095****K095 180MLBK095 180MPBK095 180TXLBK095****K095 200TXLBK095**

							
	CM	INCH	INCH	MM	NARROW KERF		
33, 36, 40P, 41, 42, 44, 49, 50, 55**, 57, 133, 134, 136**, 137**, 140**, 141**, 142**, 142 e-series, 154, 234, 235, 238, 240**, 242, 242XP/XPG, 246, 246XP/XPG, 254**, 254XP/XPG**, 257**, 261**, 262**, 262XP/XPG**, 339XP, 340, 340e series, 353, 359, 360, 362 XP**, 362XPG**, 365, 435, 435e, 435 II, 435e II, 440e, 444, 445, 445e, 450, 450e, 450 II, 450e II, 455, 455 RANCHER, 455 RANCHER II, 455e RANCHER, 455e RANCHER II, 460, 460 RANCHER, 535FBX, 543XP/XPG, 545, 545 II, 545 MARK II, 550XP/XPG, 550 XP II, 550 XP Triobrake, 550 XP MARK II, 555, 560, 560XP/XPG, 562XP/XPG, 576XP/XPG, EL16, EL1200, EL1400, EL1500, EL1600	33	13	.325	1,5		21BPX - 21LPX - 21LGX	56
	38	15	.325	1,5		21BPX - 21LPX - 21LGX	64
	40	16	.325	1,5		21BPX - 21LPX - 21LGX	66
	45	18	.325	1,5		21BPX - 21LPX - 21LGX	72
** Chain pitch may vary by year							
Note: many saws fitted in .325 / 1.5mm (21) can be converted to SpeedCut narrow kerf .325 / 1.3mm (95) cutting system. In such a case, both the bar and chain have to be changed	50	20	.325	1,5		21BPX - 21LPX - 21LGX	78
55**, 55 RANCHER, 154, 254**, 254 XP/XPG**, 257**, 261**, 262**, 262 XP/XPG**, 357, 357 XP/XPG, 359, 362 XP/XPG**, 455, 455 RANCHER, 455e Rancher, 455e RANCHER II, 455 RANCHER II, 460, 460 RANCHER, 465 RANCHER, 545, 550, 550 XP, 555, 560 XP/XPG	38	15	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	56
	40	16	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	60
	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	64
	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	68
** Chain pitch may vary by year	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	68
	50	20	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	72
	60	24	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	84
61, 65, 66, 70, 77, 160, 162, 181, 185, 254, 254XP/XPG, 260, 266, 266XP, 268, 268XP, 272, 272XP/XPG, 281, 281XP, 285, 288, 288XP, 298, 298XP, 362XP**, 362 XPG**, 365, 365 XP, 371, 371XP/XPG, 372XP/XPG, 380, 385XP, 390XP, 390XPG, 394, 394XP/XPG, 395, 395XP/XPG, 455, 480, 545, 555, 560XP/XPG, 562XP/XPG, 565, 570 XP, 572 XP, 575 XP, 576XP/XPG, 585, 592 XP, 1100, 2100, 2101, 2100XP, 2101XP, 3120, 3120XP	33	13	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	52
	38	15	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	56
	40	16	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	60
	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	64
	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	68
	50	20	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	72
** Chain pitch may vary by year	55	22	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	76
	60	24	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	84
	65	26	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	89
	70	28	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	92
	75	30	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	102
	90	36	3/8	1,6		75EXL - 75LPX - 75DX - 75DPX	115
	107	42	3/8	1,6		75EXL - 75LPX - 75DX - 75DPX	135
395 XP, 592 XP, 3120, 3120 XP	55	22	.404	1,6		59L - 59ACL - 27X	68
	60	24	.404	1,6		59L - 59ACL - 27X	76
	90	36	.404	1,6		59L - 59ACL - 27X	104

**OREGON****SINGLE RIVET
SDA - SDE - MLE****ADVANCECUT
SX - SF - PX - MLB****ADVANCECUT HD
SP - SL - MP****CONTROL CUT PXL
SPEEDCUT TXL
VERSACUT VXL****POWERCUT
RN****DURACUT
AT****K095 138PXBK095 138SLBK095 138PXLBK095****K095 158PXBK095 158SLBK095 158PXLBK095 158RNBK095
158SLGK095 (*) 158VXLGK095 (*)****K095 168PXBK095 168SLBK095 168PXLBK095 168RNBK095
168VXLGK095 (*)****K095 188PXBK095 188SLBK095 188PXLBK095 188RNBK095
188SFGK095 (*) 188SLGK095 (*) 188VXLGK095 (*)****K095 208PXBK095 208VXLGK095 208RNBK095****K095 158SLHK095 158VXLHK095****K095 168VXLHK095 168RNDK095 168ATMK095****K095 188SLHK095 188VXLHK095****K095 188SFHK095 39450 188RNDK095****Z095 188VXLHZ095****K095 208VXLHK095 208RNDK095 208ATMK095****K095 248RNDK095****D009 138RNDD009****D009 158SFHD009 158SLHD009 158VXLHD009 158RNDD009****D009 168SFHD009 168VXLHD009 168RNDD009 168ATMD009****D009 188SFHD009 188SLHD009 188VXLHD009 188RNDD009 188ATMD009****D009 208SFHD009 208SLHD009 208VXLHD009 208RNDD009 208ATMD009****D009 228RNDD009****D009 248SFHD009 248RNDD009 248ATMD009****D009 268RNDD009****D009 288RNDD009 288ATMD009****D009 308RNDD009****D009 363RNDD009 363ATLD009****D009 423RNDD009****D009 243RNFD009 243ATMD009****D009 363RNFD009 363ATLD009****D009 363RNFD009 363ATLD009**

(*) .325"-12T bar alternative

						
CM	INCH	INCH	MM	NARROW KERF		
MAKITA						
BUC122RFE, DUC121, DUC122, DUC122Z, DUC122RME, DUC122RTE, UC120D,	16,0	6,5	1/4	1,3	25AP	42
BUC250, BUC250RDE, BUC250Z, DCS230T, DCS231T, DCS232T, DUC252 (Carving), UC250D,	25	10	1/4	1,3	25AP	60
BUC300, DCS 34, DUC254RF, DUC254RT2, DUC254Z, DUC300, DUC302, DUC302Z, DUC353Z*, DUC353RF2*,	25	10	3/8 LOW PROFILE	1,1	 NARROW KERF 90PX	40
DUC355Z, EA3200S*, EA3201S*, EA3202S*,	30	12	3/8 LOW PROFILE	1,1	 NARROW KERF 90PX	45
EA3203S*, EA3500S*, EA3501S*, EA3502S*, EA3503S*, UC300D, UC3010A,	30	12	3/8 LOW PROFILE	1,1	 NARROW KERF 90PX	46
UC3020A*, UC3040A*, UC3041A*, UC3510A, UC3520A*, UC3540A*, UC3541A*, UC3551A*, UC4010A, UC4020A*, UC4040A*, UC4041A*, UC4051AK	35	14	3/8 LOW PROFILE	1,1	 NARROW KERF 90PX	52
	40	16	3/8 LOW PROFILE	1,1	 NARROW KERF 90PX	56
* Gauge may vary and be 1.3mm						
3500A, 4000A, 5012B, BUC250, BUC250RDE, BUC250Z, DCS33, DCS34, DCS221TH, DCS230T, DCS231T, DCS232T, DCS330TH, DCS330/S, DCS340, DCS341, DCS344, DCS350, DCS380, DCS390, DCS400, DCS401, DCS2501, DCS3400, DCS3400TH, DCS3410, DCS3410TH, DCS3500, DCS3501, DCS4300i, DCS4610, DES300, DES330S, DES340, DES341, DES350, DES380, DES390, DES400, DES401, DUC252, DUC252PM4, DUC252RM2, DUC252Z, DUC353Z*, DUC353RF2*, DUC254, DUC306PT2B, DUC306ZB, DUC356PT2B, DUC356ZB, EA3100T, EA3110T, EA3200S, EA3200S, EA3200S*, EA3201S*, EA3202S*, EA3203S*, EA3500F, EA3500S*, EA3501F, EA3501S*, EA3502S*, EA3503S*, EA3600F, EA3601F, EA3700T, EA4300F, UC250D, UC3001A, UC3020A*, UC3030A, UC3040A*, UC3041A*, UC3050A, UC3051A, UC3501A, UC3520A*, UC3530A, UC3530AP, UC3540A*, UC3541A*, UC3550A, UC3551A*, UC4001A, UC4020A*, UC4030A, UC4030AP, UC4040A*, UC4041A*, UC4050A, UC4051A, UC4530A, UC4530AP, UC4550A, UC4551A, VC3000A	25	10	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	40
	30	12	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	45
	30	12	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	46
	35	14	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	52
	40	16	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	56
* Gauge can vary and be 1.1mm						
DCS410, DCS411, DCS430, DCS520, DCS4300, DCS4300i, DCS4300F45C-KIT, DCS4301, DCS4301-KIT, DCS5200i, EA4300F, EA4301F	33	13	.325	1,3	 NARROW KERF 95TXL	56
	38	15	.325	1,3	 NARROW KERF 95TXL	64
	45	18	.325	1,3	 NARROW KERF 95TXL	72
DCS43, DCS52, DCS430, DCS431, DCS460, DCS461, DCS500, DCS501, DCS520, DCS4300i, DCS4600S, DCS4600SH, DCS4630, DCS4630-38, DCS5000, DCS5000H, DCS5001, DCS5001H, DCS5121, DCS5200, DCS5200i, DCS6000i, DCS6800i, EA500F, EA5000P, EA5001F, EA5001P	33	13	.325	1,5	21BPX - 21LPX - 21LGX	56
	38	15	.325	1,5	21BPX - 21LPX - 21LGX	64
	40	16	.325	1,5	21BPX - 21LPX - 21LGX	66
Above models can also be fitted in 3/8" pitch	45	18	.325	1,5	21BPX - 21LPX - 21LGX	72

**OREGON**SINGLE RIVET
SDA - SDE - MLEADVANCECUT
SX - SF - PX - MLBADVANCECUT HD
SP - SL - MPCONTROL CUT PXL
SPEEDCUT TXL
VERSACUT VXLPOWERCUT
RNDURACUT
AT

A041

A041


A041 **124MLEA041**

A041

A041 **144MLEA041**A041 **164MLEA041**A041 **100SDEA041** **100SXEA041**A041 **120SDEA041** **120SXEA041**

A041

A041 **140SDEA041** **140SXEA041**A041 **160SDEA041** **160SXEA041** **160SPEA041**A041 **180SDEA041**K041 **130MLBK041**K041 **150MLBK041**K041 **180MLBK041**K095 **138PXBK095** **138SLBK095** **138PXLBK095**K095 **158PXBK095** **158SLBK095** **158PXLBK095** **158RNBK095**
158VXLGK095 (*)K095 **168PXBK095** **168SLBK095** **168PXLBK095** **168RNBK095**
168VXLGK095 (*)K095 **188PXBK095** **188SLBK095** **188PXLBK095** **188RNBK095**
188SFGK095 (*) **188VXLGK095 (*)**

						
DCS43, DCS52, DCS430, DCS431, DCS460, DCS461, DCS500, DCS501, DCS520, DCS4300i, DCS4600S, DCS4600SH, DCS4630, DCS4630-38, DCS5000, DCS5000H, DCS5001, DCS5001H, DCS5030, DCS5121, DCS5200, DCS5200i, DCS6000i, DCS6800i, EA5000P, EA5001P	38	15	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	56
Above models can also be fitted in .325" pitch	45	18	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	64
DCS6000I, DCS6100P, DCS6101P, DCS6400, DCS6400H, DCS6401, DCS6401-45, DCS7300, DCS7300H, DCS7300P, DCS7301, DCS7301P, DCS7301-45, DCS7900, DCS7900H, DCS7900P, DCS7901, DCS7901P, DCS9000, DCS9010, EA5600F, EA7300P, EA7900P	50	20	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	72
	38	15	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	56
	40	16	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	60
	43	17	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	64
	45	18	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	68
	50	20	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	72
	60	24	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	84
	70	28	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	92
	70	28	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	94
MCCULLOCH						
Li 58CS	40	16	3/8 LOW PROFILE	1,1	 NARROW KERF 90PX	56
CS35, CS 35S, CS 42S, CS 42 STE, CS330, CS340, CS340-16, CS350, CS360, CS360T, CS370, CS380, CS380T, CS390, CS400, CS400T, CS420T, CSE 1835, CSE 1935S, CSE 2020, CSE 2040S, CSE 2040, Inline 1650, Inline 1800, Inline 1800T, Inline 1900, Inline 2200T, MAC 4-18XT, Mac 4-20 XT, Mac 20X Power, Mac 335, Mac 435, MAC418XT, Mac Cat 436, Mac Cat 438, Mac Cat 440, Mac Cat 441, Mac Cat T441, Mac Cat 442, Titanium 420, MAC842	35	14	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	52
	40	16	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	56
	45	18	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	62
CS50S, CS410, CS410T, CS 410 Elite, CS 410 Elite 15, CS450, CS450 elite, CS450 Elite 18, Promac 10-42, Promac 10-49, Xtreme 3,0, Xtreme 3,4	33	13	.325	1,3	 NARROW KERF 95TXL	56
	38	15	.325	1,3	 NARROW KERF 95TXL	64
	45	18	.325	1,3	 NARROW KERF 95TXL	72
OLEO-MAC						
GST 250, 932 CK	25	10	1/4	1,3	25AP	58
	25	10	1/4	1,3	25AP	60
GS 260	25	10	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	40
GSi30	30	12	3/8 LOW PROFILE	1,1	 NARROW KERF 90PX	45
EP 90, EP 100, EP 120, PPX-271	25	10	3/8 LOW PROFILE	1,1	 NARROW KERF 90PX	39
GS 220 Li-ion	30	12	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	45
932 C, 936, 940, GST 360	30	12	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	45
	35	14	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	52
937, 941 C, GS 35, GS 35C, GS 37, GSH 40, GS 41*, GS 180 E, GS 200 E, GS 350, GS 350C, GS 370, GS 371*, GSH 400, GS 410 C, GS 411*	35	14	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	52
	35	14	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	53
	40	16	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	56
	40	16	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	57
* Pitch may vary	40	16	3/8 LOW PROFILE	1,3	POWERSHARP	56
937 P.S., GS 370 P.S. (PowerSharp)	33	13	.325	1,3	 NARROW KERF 95TXL	56
GS 41*, GS 44, GS 45, GS 371*, GS 410 CX, GS 411*, GS 440, GS 451, 941 CX	38	15	.325	1,3	 NARROW KERF 95TXL	64
	40	16	.325	1,3	 NARROW KERF 95TXL	66
	45	18	.325	1,3	 NARROW KERF 95TXL	72

**OREGON****SINGLE RIVET
SDA - SDE - MLE****ADVANCECUT
SX - SF - PX - MLB****ADVANCECUT HD
SP - SL - MP****CONTROL CUT PXL
SPEEDCUT TXL
VERSACUT VXL****POWERCUT
RN****DURACUT
AT**

K153

158SLHK153

K153

188SLHK153**188VXLHK153**

K153

D009

158SFHD009**158SLHD009****158VXLHD009****158RNDD009**

D009

168SFHD009**168VXLHD009****168RNDD009****168ATMD009**

D009

178VXLHD009**178RNDD009****178ATMD009**

D009

188SFHD009**188SLHD009****188VXLHD009****188RNDD009****188ATMD009**

D009

208SFHD009**208SLHD009****208VXLHD009****208RNDD009****208ATMD009**

D009

248SFHD009**248RNDD009****248ATMD009**

D009

288RNDD009**288ATMD009**

D009

A041

164MLEA041

A041

140SDEA041**140SXEA041**

A041

160SDEA041**160SXEA041****160SPEA041**

A041

180SDEA041

K095

130MLBK095**130TXLBK095**

K095

150MLBK095**150MPBK095****150TXLBK095**

K095

180MLBK095**180MPBK095****180TXLBK095**

A041

100SDAA041

A041

A041

100SDEA041**100SXEA041**

A318

104MLEA318

A041

120SDEA041**120SXEA041**

A041

120SDEA041**120SXEA041**

A041

140SDEA041**140SXEA041**

A041

140SDEA041**140SXEA041**

A041

A041

160SDEA041**160SXEA041****160SPEA041**

A041

A041

160SDEA041

K041

130MLBK041

K041

150MLBK041


K041

160MLBK041

K041

180MLBK041

(*) .325"-12T bar alternative

							
	CM	INCH	INCH	MM	NARROW KERF		
GSH 51*, GSH 56*, GSH 510*, GSH 560*	33	13	.325	1,3	 NARROW KERF	95TXL	56
* Pitch and/or gauge may vary	38	15	.325	1,3	 NARROW KERF	95TXL	64
	40	16	.325	1,3	 NARROW KERF	95TXL	66
	45	18	.325	1,3	 NARROW KERF	95TXL	72
938, 947, 952, 956*, 962*, GSH 51*, GSH 56*, GSH 510*, GS 520, GSH 560*	33	13	.325	1,5		21BPX - 21LPX - 21LGX	56
* Pitch and/or gauge may vary	38	15	.325	1,5		21BPX - 21LPX - 21LGX	64
	40	16	.325	1,5		21BPX - 21LPX - 21LGX	66
	45	18	.325	1,5		21BPX - 21LPX - 21LGX	72
	50	20	.325	1,5		21BPX - 21LPX - 21LGX	78
	50	20	.325	1,5		21BPX - 21LPX - 21LGX	80
956*, 962*, 965 HD, GSH 51*, GSH 56*, GSH 510*, GSH 560*	40	16	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	60
* Pitch and/or gauge may vary	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	68
	50	20	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	72
GS 650, GS 651	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	68
	50	20	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	72
	60	24	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	84
261, 264, 350, 481, 482, GS 720, GS 820	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	68
	50	20	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	72

OREGON

PS600	25	10	1/4	1,3		25AP	58
PS250	20	8	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	34
PS750	20	8	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	33
CS1200	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	52
CS1400	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	56
CS1500	40	16	3/8 LOW PROFILE	1,3		POWERSHARP	56
	45	18	3/8 LOW PROFILE	1,3		POWERSHARP	62
CS250	35	14	3/8 LOW PROFILE	1,3		POWERSHARP	52
CS300	40	16	3/8 LOW PROFILE	1,3		POWERSHARP	56

RYOBI

OPP1820, OPS1820Li, RPP1815S, RPP182015, RPP182015S, RPP18020Li, RPP182020, RPP182025, RPP182025F	20	8	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	33
RPP720, RPP750S, RPP750450, RPP755E	25	10	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	40
OCS1830, RCS36, RCS36 AKKU, RCS 1830 Akku, RCS18X3050F	30	12	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	45
RY36CSX35A-0, RY36CSX35A-150, RCS36X3550HI	35	14	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	52
35B, CS36C, CS41, CSE385CB, CSE3330, HC31, HC36, HC41, HCS31, HCS36	30	12	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	44
	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	49
	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	55
KS33B-SET, PCN-3335, RCS33, RCS35, RCS40, RCS42, RCS1935B2C, RCS-3335C, RCS3535A, RCS3535B, RCS3535CA, RCS3535CB, RCS3535C2, RCS3835T, RCS 3550 Akku, RCS18352C	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	52
RCS3840T, RCS4040CA, RCS4240B, RY36CSX40B-0, RY36CSX40B-160	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	56
ECS2040, RCS1935, RCS2340, RCS3540C, RZC3540C	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	57
RCS4046C	46	18	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	62

**OREGON****SINGLE RIVET**
SDA - SDE - MLE**ADVANCECUT**
SX - SF - PX - MLB**ADVANCECUT HD**
SP - SL - MP**CONTROL CUT PXL**
SPEEDCUT TXL
VERSACUT VXL**POWERCUT**
RN**DURACUT**
AT

K095		130MLBK095		130TXLBK095	
K095		150MLBK095	150MPBK095	150TXLBK095	
K095		160MLBK095		160TXLBK095	
K095		180MLBK095	180MPBK095	180TXLBK095	
K095		138PXBK095	138SLBK095	138PXLBK095	
K095		158PXBK095	158SLBK095	158PXLBK095	158RNBK095
K095		168PXBK095	168SLBK095	168PXLBK095	168RNBK095
K095		188PXBK095	188SLBK095	188PXLBK095	188RNBK095
K095		188SFGK095 (*)	188SLGK095 (*)	188VXLGK095 (*)	188RNBK095
K095		208PXBK095		208VXLGK095	208RNBK095
K095					
K095				168VXLHK095	168RNDK095
K095		188SFHK095	39450		188RNDK095
K095				208VXLHK095	208RNDK095
D009		188SFHD009	188SLHD009	188VXLHD009	188RNDD009
D009		208SFHD009	208SLHD009	208VXLHD009	208RNDD009
D009		248SFHD009			248RNDD009
D024					
D024		208SFHD024			208ATMD024


A041	100SDAA041		
A041	084MLEA041		
A041	080SDEA041		
A041	140SDEA041	140SXEA041	
A041	160SDEA041	160SXEA041	160SPEA041
A041	160SDEA041		
A041	180SDEA041		
A041	140SDEA041		
A041	160SDEA041		

A318	120SDEA318	
A318	140SDEA318	
A318	160SDEA318	160SXEA318

A041	140SDEA041	140SXEA041
------	-------------------	-------------------


A041	160SDEA041	160SXEA041	160SPEA041
A041	160SDEA041	160SXEA041	
A041	180SDEA041		

(*) .325"-12T bar alternative

						
CM	INCH	INCH	MM	NARROW KERF		
SHINDAIWA						
250TCS, 251TCS, 269TCS, 280TCS	25	10	1/4	1,3	25AP	58
	25	10	1/4	1,3	25AP	60
250TS, 251TS	25	10	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	40
280TS	25	10	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	40
	30	12	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	45
	30	12	3/8 LOW PROFILE	1,3	on Original Equipement Bar 91P - 91PX - 91VXL	47
251WS, 269TS, 305S, 320TS, 352S, 353S, 360, 360TS, 361WS, 362TS, 362WS	30	12	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	45
	30	12	3/8 LOW PROFILE	1,3	on Original Equipement Bar 91P - 91PX - 91VXL	47
	35	14	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	52
	35	14	3/8 LOW PROFILE	1,3	on Original Equipement Bar 91P - 91PX - 91VXL	53
	40	16	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	56
	40	16	3/8 LOW PROFILE	1,3	on Original Equipement Bar 91P - 91PX - 91VXL	57
	40	16	3/8 LOW PROFILE	1,3	on Original Equipement Bar 91P - 91PX - 91VXL	58
377, 390SX	33	13	.325	1,3	 NARROW KERF 95TXL	56
	38	15	.325	1,3	 NARROW KERF 95TXL	64
	40	16	.325	1,3	 NARROW KERF 95TXL	66
451S*	33	13	.325	1,3	 NARROW KERF 95TXL	56
	38	15	.325	1,3	 NARROW KERF 95TXL	64
	45	18	.325	1,3	 NARROW KERF 95TXL	72
389S, 405S, 451S*, 452S, 452GS, 488, 488P, 490, 501SX	33	13	.325	1,5	21BPX - 21LPX - 21LGX	56
	38	15	.325	1,5	21BPX - 21LPX - 21LGX	64
	40	16	.325	1,5	21BPX - 21LPX - 21LGX	66
	45	18	.325	1,5	21BPX - 21LPX - 21LGX	72
	50	20	.325	1,5	21BPX - 21LPX - 21LGX	80
598, 600, 600SX, 601SX	40	16	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	60
	45	18	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	64
	45	18	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	68
	50	20	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	72
	60	24	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	84
757, 757C	70	28	3/8	1,5	73EXL - 73LPX - 73DX - 73DPX	92
SOLO by AL-KO						
613, 620, 621, CS 4235	30	12	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	45
	35	14	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	52
	40	16	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	57
6436, 6238, 6240, 6442	35	14	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	53
	40	16	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	57
614, 630, 633, 635, 635 Eco, 636, 637, 640, 643, CC 1936, CC 2740	30	12	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	45
	35	14	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	52
	40	16	3/8 LOW PROFILE	1,3	91P - 91PX - 91VXL	56
	40	16	3/8 LOW PROFILE	1,3	on Original Equipement Bar 91P - 91PX - 91VXL	57

**OREGON**SINGLE RIVET
SDA - SDE - MLEADVANCECUT
SX - SF - PX - MLBADVANCECUT HD
SP - SL - MPCONTROL CUT PXL
SPEEDCUT TXL
VERSACUT VXLPOWERCUT
RNDURACUT
AT

A041	100SDAA041				
A041					
A041	100SDEA041	100SXEA041			
A041	100SDEA041	100SXEA041			
A041	120SDEA041	120SXEA041			
A041					
A041	120SDEA041	120SXEA041			
A041					
A041	140SDEA041	140SXEA041			
A041					
A041	160SDEA041	160SXEA041	160SPEA041		
A041					
A041					
K041		130MLBK041			
K041		150MLBK041			
K041		160MLBK041			
K095		130MLBK095		130TXLBK095	
K095		150MLBK095	150MPBK095	150TXLBK095	
K095		180MLBK095	180MPBK095	180TXLBK095	
K041		138PXBK041			
K041		158PXBK041		158PXLBK041	
K041		168PXBK041		168VXLGK041	
K041				188VXLGK041	
K041					
D009		168SFHD009		168VXLHD009	168RNDD009 168ATMD009
D176				188VXLHD176	
D009		188SFHD009	188SLHD009	188VXLHD009	188RNDD009 188ATMD009
D009		208SFHD009	208SLHD009	208VXLHD009	208RNDD009 208ATMD009
D009		248SFHD009			248RNDD009 248ATMD009
D009					288RNDD009 288ATMD009
A041	120SDEA041	120SXEA041			
A041	140SDEA041	140SXEA041			
A041	160SDEA041	160SXEA041			
A041	140SDEA041	140SXEA041			
A041	160SDEA041	160SXEA041			
A095	120SDEA095	120SXEA095			
A095	140SDEA095	140SXEA095			
A095	160SDEA095	160SXEA095			
A095					

					 NARROW KERF		# 
	CM	INCH	INCH	MM			
639, 641, 643 IP, 644, 644 SP, 645, 646, 647, 650, 651, 651 C, 651 SP, 652, 654, 656 *, 656 C *, CC 3045, 3351, 3352, 4051, 4256, 6646, 6651, 6656 *	33	13	.325	1,5		21BPX - 21LPX - 21LGX	56
	38	15	.325	1,5		21BPX - 21LPX - 21LGX	64
	40	16	.325	1,5		21BPX - 21LPX - 21LGX	66
	45	18	.325	1,5		21BPX - 21LPX - 21LGX	72
* Pitch may vary and be 3/8							
656 *, 656 C *, 6656 *	40	16	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	60
	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	68
	50	20	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	72
* Pitch may vary and be .325							
	38	15	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	56
	40	16	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	60
	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	68
	50	20	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	72
	60	24	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	84
662, 665, 667, 670, 675, 680, 681, 690	70	28	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	92
STIGA							
SPR 255 C, SPR 276 C	25	10	1/4	1,3		25AP	60
SP 316 C	30	12	1/4	1,3		25AP	64
MP 500, MP 700, SMT 500 AE, SPR 255, SPR 276, SPS 700 AE, SE 1.6, SE 1.8, SE 182, SP 340	25	10	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	40
	30	12	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	44
	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	50
P382S	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	56
SPR 500 AE	30	12	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	45
ES 1814, SE 1835	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	52
A 375, A 405, C1.8 E, C1.8 ET, C2.0 E, C2.0 ET, C2.2 E, C2.2 ET, C38, C38T, CP40, CS48Li14, EA1800, EA2000Q, EL2416Q, ES 2040, ES 2040T, SC48AE, SE 180, SE 180 Q, SE 190, SE 1814 Q, SE 2016 Q, SE 2216 Q, SEV 2416 Q, SP350, SP352, SP375, SP375 Q, XC 238, XC 240	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	52
	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	57
ES 2016 Q, ES 2216 Q, SC 80 AE, SE 2240 Q	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	56
A 3700, A 4000, SP37, SP316, SP372, SP375, SP375Q, SP386	30	12	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	45
	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	53
	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	57
SP246, SP 370, SP 405 Q, SP 410, SP 426	33	13	.325	1,3	 NARROW KERF	95TXL	56
	38	15	.325	1,3	 NARROW KERF	95TXL	64
	40	16	.325	1,3	 NARROW KERF	95TXL	66
PS46, PS52, PS460, PS510, SP 466, SP 526	33	13	.325	1,5		21BPX - 21LPX - 21LGX	56
	38	15	.325	1,5		21BPX - 21LPX - 21LGX	64
	40	16	.325	1,5		21BPX - 21LPX - 21LGX	66
	45	18	.325	1,5		21BPX - 21LPX - 21LGX	72

**OREGON****SINGLE RIVET
SDA - SDE - MLE****ADVANCECUT
SX - SF - PX - MLB****ADVANCECUT HD
SP - SL - MP****CONTROL CUT PXL
SPEEDCUT TXL
VERSACUT VXL****POWERCUT
RN****DURACUT
AT**

K095		138PXBK095	138SLBK095	138PXLBK095		
K095		158PXBK095	158SLBK095 158SLGK095 (*)	158PXLBK095 158VXLGK095 (*)	158RNBK095	
K095		168PXBK095	168SLBK095	168PXLBK095 168VXLGK095 (*)	168RNBK095	
K095		188PXBK095 188SFGK095 (*)	188SLBK095 188SLGK095 (*)	188PXLBK095 188VXLGK095 (*)	188RNBK095	
K095				168VXLHK095	168RNDK095	168ATMK095
K095		188SFHK095	39450		188RNDK095	
K095				208VXLHK095	208RNDK095	208ATMK095
D009		158SFHD009	158SLHD009	158VXLHD009	158RNDD009	
D009		168SFHD009		168VXLHD009	168RNDD009	168ATMD009
D009		188SFHD009	188SLHD009	188VXLHD009	188RNDD009	188ATMD009
D009		208SFHD009	208SLHD009	208VXLHD009	208RNDD009	208ATMD009
D009		248SFHD009			248RNDD009	248ATMD009
D009					288RNDD009	288ATMD009


A041	100SDEA041	100SXEA041	
A074	120SDEA074	120SXEA074	120SPEA074
A074	140SDEA074	140SXEA074	140SPEA074
A074	160SDEA074		
A041	120SDEA041	120SXEA041	
A041	140SDEA041	140SXEA041	

A041	140SDEA041	140SXEA041	
------	-------------------	-------------------	--

A041	160SDEA041	160SXEA041	
------	-------------------	-------------------	--

A041	160SDEA041	160SXEA041	160SPEA041
A041	120SDEA041	120SXEA041	
A041	140SDEA041	140SXEA041	
A041	160SDEA041	160SXEA041	
K041		130MLBK041	
K041		150MLBK041	
K041		160MLBK041	

K095		138PXBK095	138SLBK095	138PXLBK095		
K095		158PXBK095	158SLBK095 158SLGK095 (*)	158PXLBK095 158VXLGK095 (*)	158RNBK095	
K095		168PXBK095	168SLBK095	168PXLBK095 168VXLGK095 (*)	168RNBK095	
K095		188PXBK095 188SFGK095 (*)	188SLBK095 188SLGK095 (*)	188PXLBK095 188VXLGK095 (*)	188RNBK095	

	 CM INCH	 INCH	 MM	 NARROW KERF		
STIHL						
HT 56, HT 70, HT 75, HT 100, HT 101***, HT 130, HT 131***, HTE 60	30	12	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX 44
*** Gauge may vary						
009, 017, 019, 019T, 023L, E14, E140, MS170, MS 170-D, MS 171, MS 180**, MS 180 C-BD**, MS 180 C-BE**, MS 181***, MS 181C-BE**, MS 190***, MS 190T***, MS 192, MS 192C-E***, MS 192T***, MS 193 C-E***, MS 194 C-E, MS 200T***, MS 201T***, MSE 140***, MSE 140 C-BQ, MSE 141, MSE 141 C, MSE 141 C-Q, MSE 170***, MSE 170C-Q, MSE 170C-BQ	30	12	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX 44
	35	14	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX 50
** 1.1 mm gauge as from year 2014. 1.3 mm gauge until year 2013.	40	16	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX 55
*** Gauge may vary						
009, 010, 011, 012, 015, 018/CQT, 020, 020T, 021/CQT, 023/C, 023/CQT, 025, AV Electronic, E10, E14, E160, E180/CQT, HT 101***, HT 131***, MS 180**, MS 180 C-BD**, MS 180 C-BE**, MS 181***, MS 181 C-BE**, MS 190***, MS 190T***, MS 191, MS 191T, MS 192C-E***, MS 192T***, MS 192TC-E, MS 193 C-E***, MS 193T, MS 200, MS 200T***, MS 201, MS 201 C-M, MS 201T***, MS 201TC-M, MS 210, MS 210 C-BE, MS 210 C-BQ, MS 211, MS 211C-BE, MS 230, MS 230 C-BE, MS 231 *, MS 231 C-BE *, MS 241 *, MS 241C-BEM *, MS 241C-M *, MS 241C-MQ *, MS 241C-M VW *, MS 250, MS 250 C-BE, MS 251 *, MS 251 C-BE *, MSA 220 C-B, MSE 140***, MSE 160, MSE 160 C-BQ, MSE 170***, MSE 180, MSE 180 C-BQ, MSE 190 C-B, MSE 190C-Q, MSE 190C-BQ, MSE 200, MSE 200 C-BQ, MSE 210, MSE 230	30	12	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL 44
	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL 50
* Chain pitch and/or gauge may vary by year ** 1.3 mm gauge until year 2013. 1.1 mm gauge as from year 2014 *** Gauge may vary	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL 55
MSE 210 C B, MSE 210 C BQ, MSE 230 C B, MSE 230 C BQ	30	12	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL 45
	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL 51
Above models with rapid chain tensioner & 7 tooth sprocket take an extra drive link	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL 56
MS 251 *	35	14	.325	1,3	 NARROW KERF	95TXL 56
* Chain pitch and/or gauge may vary by year	40	16	.325	1,3	 NARROW KERF	95TXL 62
MS 251 C-BE *	35	14	.325	1,3	 NARROW KERF	95TXL 57
* Chain pitch and gauge may vary by year	40	16	.325	1,3	 NARROW KERF	95TXL 63
MS 261, MS 261 C-BM, MS 261 C-M, MS 261 C-M VW, MS 271, MS 271 C-BE	35	14	.325	1,3	 NARROW KERF	95TXL 60
	38	15	.325	1,3	 NARROW KERF	95TXL 62
New fit up as from 2020	40	16	.325	1,3	 NARROW KERF	95TXL 67



OREGON



SINGLE RIVET
SDA - SDE - MLE

ADVANCECUT
SX - SF - PX - MLB

ADVANCECUT HD
SP - SL - MP

CONTROL CUT PXL
SPEEDCUT TXL
VERSACUT VXL

POWERCUT
RN

DURACUT
AT

A074 124MLEA074

A074 124MLEA074

A074 144MLEA074

A074

A074 120SDEA074 120SXEA074 120SPEA074

A074 140SDEA074 140SXEA074 140SPEA074

A074 160SDEA074 160SXEA074 160SPEA074

A074 120SDEA074 120SXEA074 120SPEA074

A074 140SDEA074 140SXEA074 140SPEA074

A074 160SDEA074 160SXEA074 160SPEA074

A074

A074


A074

A074

D025

D025

D025

							
	CM	INCH	INCH	MM			
MS 231 *, MS 241 *, MS 241 C-M *, MS 251 *	35	14	.325	1,6		22BPX - 22LPX - 22LGX	56
* Chain pitch and/ or gauge may vary by year	40	16	.325	1,6		22BPX - 22LPX - 22LGX	62
	45	18	.325	1,6		22BPX - 22LPX - 22LGX	68
MS 231 C-BE *, MS 251 C-BE*, MS 251 C-BEQ *	35	14	.325	1,6		22BPX - 22LPX - 22LGX	57
	40	16	.325	1,6		22BPX - 22LPX - 22LGX	63
* Chain pitch and/ or gauge may vary by year	45	18	.325	1,6		22BPX - 22LPX - 22LGX	68
032*, 034*, 036*, 039*, MS 240, MS 260, MS 260 C-B, MS 260-W, MS 260-DW, MS 260 C-BW, MS 261, MS 261 C-BE, MS 261 C-Q, MS 261 C-M, MS 261 C-M VW, MS 261 C-BM, MS 261-VW, MS 270, MS 270 C-B, MS 271, MS 271 C-BE, MS 280, MS 280 C-B, MS 280 C-BQ, MS 280 I, MS 280 C-BI, MS 280 C-BQI, MS 291 *, MS 360*	33	13	.325	1,6		22BPX - 22LPX - 22LGX	56
	38	15	.325	1,6		22BPX - 22LPX - 22LGX	62
	40	16	.325	1,6		22BPX - 22LPX - 22LGX	67
	45	18	.325	1,6		22BPX - 22LPX - 22LGX	74
* Chain pitch may vary by year	50	20	.325	1,6		22BPX - 22LPX - 22LGX	81
029, 031, 032*, 034*, 036*, 038, 039*, 041, 042, 044, 045, 046, 048, 056, 064, 066, MS 290, MS 291 *, MS 310, MS 311, MS340, MS 341, MS 360*, MS 361, MS 361 C-B, MS 361 C-BQ, MS 361 C-Q, MS 361-W, MS 361-VW, MS 362, MS 362 C-B, MS 362 C-Q, MS 362 C-M, MS 362 C-MQ, MS 362 C-M VW, MS 362 V-W, MS 390, MS 391, MS 400 C-M, MS 440, MS 440-D, MS 440-W, MS 441, MS 441 C-M, MS 441 C-M W, MS 441-W, MS 441 C-Q, MS 460, MS 460-D, MS 460-W, MS 461, MS 462 C-M, MS 462 C-M VW, MS 650, MS 660, MS 660-W, MS 661, MS 661 C-M, MS 661 C-M VW, MSE 220 C-Q **, MSE 250, MSE 250 C-BQ, MS 500i, MS 500i W	38	15	3/8	1,6		75EXL - 75LPX - 75DX - 75DPX	56
	40	16	3/8	1,6		75EXL - 75LPX - 75DX - 75DPX	60
	45	18	3/8	1,6		75EXL - 75LPX - 75DX - 75DPX	66
	50	20	3/8	1,6		75EXL - 75LPX - 75DX - 75DPX	72
	55	22	3/8	1,6		75EXL - 75LPX - 75DX - 75DPX	77
	60	24	3/8	1,6		75EXL - 75LPX - 75DX - 75DPX	84
	70	28	3/8	1,6		75EXL - 75LPX - 75DX - 75DPX	91
* Chain pitch may vary by year ** 57 drive link for 15 bar	90	36	3/8	1,6		75EXL - 75LPX - 75DX - 75DPX	114
	105	42	3/8	1,6		75EXL - 75LPX - 75DX - 75DPX	135
07S, 08, 08S, 050, 051, 075, 076, 084, 088, E30, MS 780, MS 880, MS 881	43	17	.404	1,6		59L - 59ACL - 27X	60
	53	21	.404	1,6		59L - 59ACL - 27X	68
	63	25	.404	1,6		59L - 59ACL - 27X	80
070, 090	63	25	.404	1,6		59L - 59ACL - 27X	84
	75	30	.404	1,6		59L - 59ACL - 27X	92
	90	36	.404	1,6		59L - 59ACL - 27X	104
	104	42	.404	1,6		59L - 59ACL - 27X	122

WORX

WG349E, WG349E.9	20	8	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	33
WG322, WG322.9, WG322E.1, WG322E.9, WG323, WG323.9	25	10	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	40
WG381, WG381E, WG381E.1, WG381.9	30	12	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	45
WG384, WG384.9, WG384E.9, WG384E9	35	14	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	52
WG385E, WG385.9	40	16	3/8 LOW PROFILE	1,1	 NARROW KERF	90PX	56
WG303, WG303E, WG303.1	40	16	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	57
WG305, WG305E, WG305.1, WG305.2	35	14	3/8 LOW PROFILE	1,3		91P - 91PX - 91VXL	52

**OREGON****SINGLE RIVET
SDA - SDE - MLE****ADVANCECUT
SX - SF - PX - MLB****ADVANCECUT HD
SP - SL - MP****CONTROL CUT PXL
SPEEDCUT TXL
VERSACUT VXL****POWERCUT
RN****DURACUT
AT**

A074

A074

163SLBA074**163PXLBA074**

A074

183PXBA074**183PXLBA074**

A074

A074

163SLBA074**163PXLBA074**

A074

183PXBA074**183PXLBA074**

D025

133PXLBD025

D025

153SFGD025**153VXLGD025**

D025

163SFGD025**163VXLGD025****163RNBD025****163ATMD025**

D025

183SFGD025**183VXLGD025****183RNBD025****183ATMD025**

D025

203VXLGD025**203ATMD025**

D025

153SFHD025**153VXLHD025**

D025

163SFHD025**163SLHD025****163VXLHD025****163RNDD025****163ATMD025**

D025

183SFHD025**183SLHD025****183VXLHD025****183RNDD025****183ATMD025**

D025

203SFHD025**203SLHD025****203VXLHD025****203RNDD025****203ATMD025**

D025

223RNDD025

D025

243SFHD025**243RNDD025****243ATMD025**

D025

283RNDD025

D025

363RNDD025**363ATMD025**

D025

423RNDD025

E031

E031

E031

E099

253ATLE099

E099

303ATLE099

E099

363ATLE099

E099

A041

084MLEA041

A041

A041

124MLEA041

A041

144MLEA041

A041

164MLEA041

A041

160SDEA041**160SXEA041**

A041

140SDEA041**140SXEA041**



75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged. Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents. Engineering is the bedrock of our reputation.



PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS.

OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2024 - AD100-002-EN




Discover more of our products at
OregonProducts.com

OREGON[®]

CHAIN AND BAR MAINTENANCE

CBM_1.2
EN/EUR

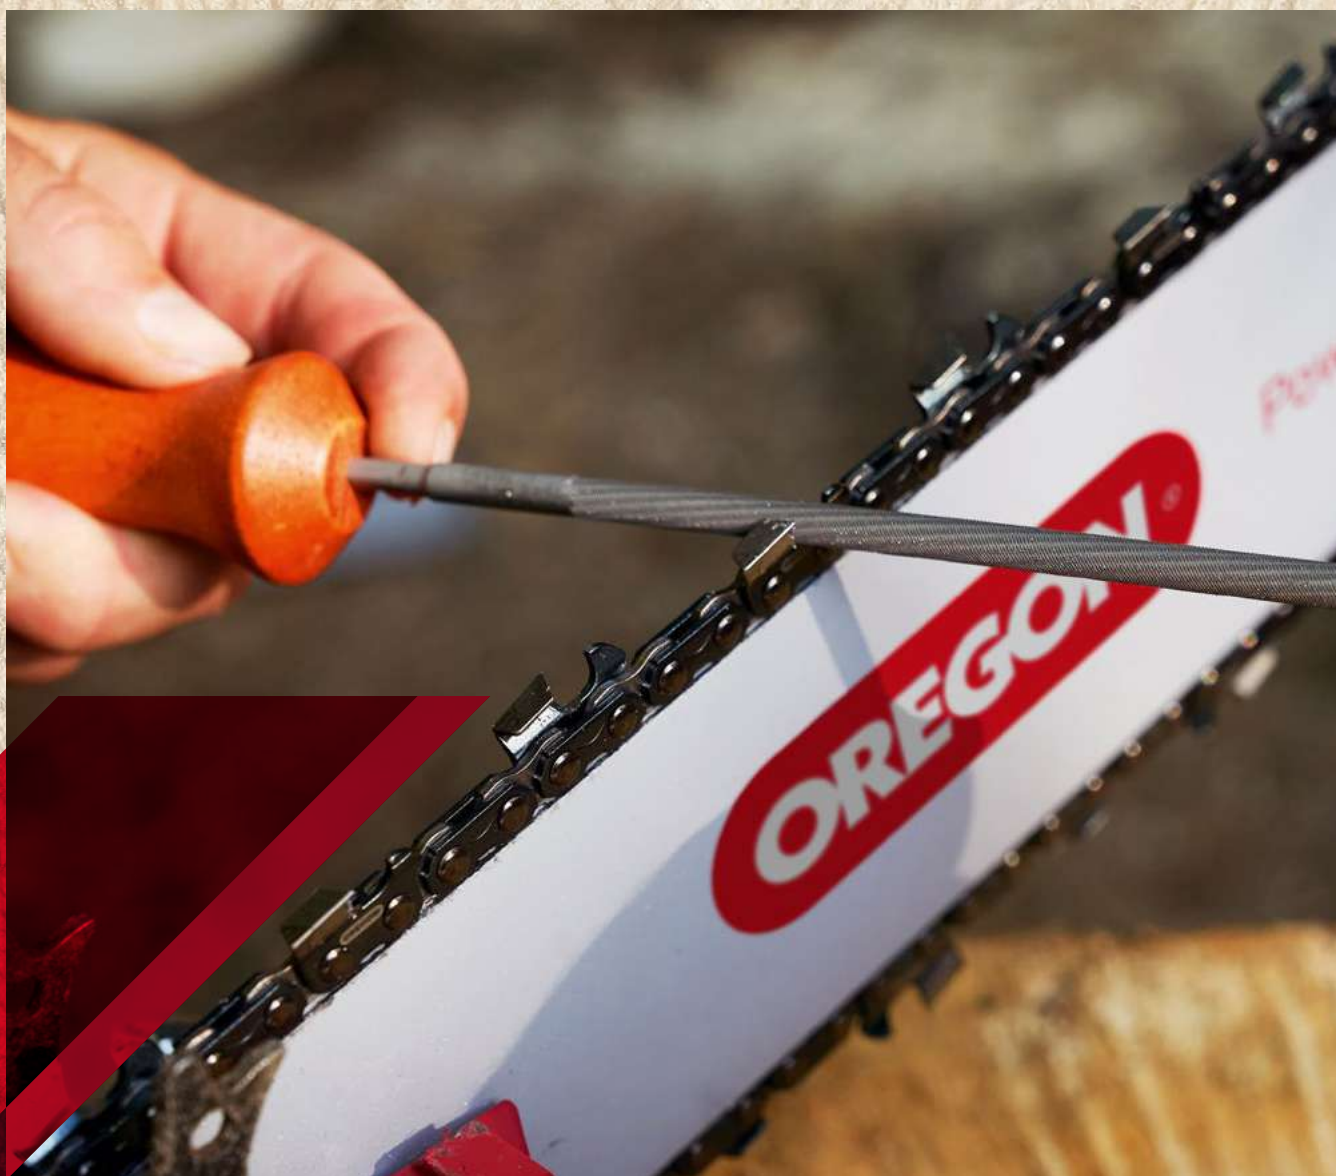





OREGON®

Oregon® understands that the needs of woodcutters – professionals and novices – are as diverse as the terrains and environments in which they work.

To keep your saw's performance at its best, Oregon offers a wide range of professional-grade maintenance tools & accessories.

Quality and Performance can only last through an equal high standard of maintenance. This is why at Oregon® we spend as much attention & time providing you with professional grade maintenance tools & accessories.



WORKSHOP CHAIN MAINTENANCE

Chain Grinders

The Oregon Chain Grinder range provides benefits for both dealers and professional end users seeking an efficient, consistent and high-quality grind in less time. Oregon grinders combine premium quality and ease of use to deliver precise and accurate sharpening on all chain pitches.

Whether you are looking for the convenience and space optimization of a bench minigrinder or the heavy duty, high-volume efficiency of a hydraulic assisted model, there is always an Oregon chain grinder to suit your sharpening needs.

COMPACT BENCH GRINDER

- Single phase, direct-drive, one-way, 230V AC, 50 Hz, 85 watt
- The compact alternative to full-size bench grinders
- Ideal for chain saw owners and small workshops
- Precise grinding and durable



Grinder **590181** 1/4" ▶.404" 1,1▶ 2,0mm

Grinding wheels **106547P** 1/4", 3/8" Low Pro
106548P .325", 3/8", .404"

PROFESSIONAL COMPACT BENCH GRINDER

- Single-phase, direct-drive, one-way, 230V-AC, 50 Hz, 214 watt
- Long lasting motor.
- Precise grinding and durable.
- Built-in-light
- One-way motor rotation for safe operation
- Easy-to-use adjustments
- Bench or wall mount



Grinder **410-230** 1/4" ▶.404" 1,1▶ 2,0mm

Grinding wheels **32659P** 1/4", 3/8" Low Pro
32660P .325", 3/8", .404"
32661P depth gauge all chain types

PROFESSIONAL BENCH GRINDER

- Single-phase, direct-drive, one-way, 230V-AC, 50 Hz, 214 watt
- Torsion spring for comfort grinding
- Indexing chain stop assembly
- Advanced vise setting for precision grinding
- Built-in light
- Bench or wall mount



PROFESSIONAL HYDRAULIC ASSIST BENCH GRINDER

- Single-phase, direct-drive, one-way, 230V-AC, 50 Hz, 214 watt
- Hydraulic assist for automatic vise clamping
- Precise and accurate sharpening
- Grinds all chains up to 3/4" pitch
- Wide clamping area and clear markings for easy adjustment
- Built-in 15 watt light
- Bench or wall mount



	OREGON		
Grinder	520-230	1/4" ▶ .404"	1,1 ▶ 2,0mm

Grinding wheels	32659P	1/4", 3/8" Low Pro
	32660P	.325", 3/8", .404"
	OR534-516	3/4"
	32661P	depth gauge all chain types

	OREGON		
Grinder	620-230	1/4" ▶ 3/4"	1,1 ▶ 3,1mm

Grinding wheels	32659P	1/4", 3/8" Low Pro
	32660P	.325", 3/8", .404"
	OR534-516	3/4"
	32661P	depth gauge all chain types



PRODUCT NAME					SPECIFICATIONS	
			MM	INCH		



ROUND FILES

Round File (12 pack)	14012		3,2	1/8	• Superior performance and long stay-sharp • Sharp teeth with smooth bite • 12/box • Swiss-made	25
	70504	1/4" .325" LowPro 3/8" LowPro 91	4,0	5/32		
	70511	3/8" LowPro 90	4,5	11/64		
	70503	.325"	4,8	3/16		
	70505	3/8" .404"	5,2	13/64		
	70502	3/8" .404"	5,5	7/32		
	70501		6,4	1/4		
	70504T	1/4" .325" LowPro 3/8" LowPro 91	4,0	5/32		
	70511T	3/8" LowPro 90	4,5	11/64		
	70503T	.325"	4,8	3/16		
Round File (4X3 pack)	70505T	3/8" .404"	5,2	13/64	• 4x3 Pack include 4 convenient vinyl packs with 3 files each	20
	70502T	3/8" .404"	5,5	7/32		
	Q70509C	1/4" .325" LowPro 3/8" LowPro 91	4,0	5/32		
	Q70512C	3/8" LowPro 90	4,5	11/64		
Round File (3-pack blister)	Q70508C	.325"	4,8	3/16	• High performance and long stay-sharp • Sharp teeth with smooth bite • Resists clogging	55
	Q70507C	3/8" .404"	5,5	7/32		



PRODUCT NAME	OREGON			SPECIFICATIONS		
				MM	INCH	

FLAT FILES

Flat File
12 pack

12211

- Aggressive flat file for chain cutter depth gauge maintenance
- For use in combination with an Oregon depth gauge tool
- Superior performance and long stay-sharp
- Sharp teeth with smooth bite
- 12/box
- Swiss-made

25



DEPTH GAUGE TOOLS

27530

1/4"
.325" LowPro
3/8" LowPro 90-91
.325"

0,63 .025

- Makes accurate and consistent depth gauge setting easy for safety and performance

20



22291

.404"

0,76 .030

- 22291 (10-pack)

WOODEN FILE HANDLE

534370

- Fits round and flat files

240



FILE HOLDERS

Q16265C

1/4"
.325" LowPro
3/8" LowPro 91

4,0 5/32

Q29192C

3/8" LowPro 90

4,5 11/64

- Grips file securely and keeps it at the correct depth
- Lines on the frame for easy file alignment

20

Q18228C

.325"

4,8 3/16

Q13252C

3/8"
.404"

5,5 7/32



PRODUCT NAME	OREGON				SPECIFICATIONS	
			MM	INCH		



SHARPENING KITS

Display Pack	Q90405	1/4" .325" LowPro 3/8" LowPro 91	4,0	5/32	• Kits include: • Fully assembled file guide with file and wooden handle for chain top-plate maintenance • Assembled wooden handle and flat file and one depth gauge tool for chain depth gauge maintenance. • Bar groove cleaner to clean guide bars groove and oil holes • .025" depth gauge tool • 90406 Kit includes the .030" depth gauge tool	16
	Q105860	3/8" LowPro 90	4,5	11/64		
	Q90407	.325"	4,8	3/16		
	Q90404	3/8"	5,5	7/32		
	90406	.404" (26, 27X/R)	5,5	7/32		
Pouch	558488	1/4" .325" LowPro 3/8" LowPro 91	4,0	5/32	• Easy-to-carry rolled-up pouch • Highly visible red colour • Easy to attach on waist belt • Pouch includes: • Bar, chain and file measuring tool • User manual • Fully assembled file guide with file and wooden handle for chain top-plate maintenance • Assembled wooden handle and flat file and one depth gauge tool for chain depth gauge maintenance. • Bar groove cleaner to clean guide bars groove and oil holes • .025" depth gauge tool	16
	558549	3/8" LowPro 90	4,5	11/64		
	558550	.325"	4,8	3/16		
	558551	3/8"	5,5	7/32		



ELECTRIC SURE SHARP

12V Grinder

585015

1/4"

.325" LowPro

3/8" LowPro 91

3/8" LowPro 90

.325"

3/8"

.404"

- Fast grinding
- Runs on standard 12-Volt auto-type battery or using cigarette lighter plug
- Includes 4 sizes of grinding stones (4.0 mm, 4.5 mm, 4.8 mm and 5.5 mm)
- Includes battery clips and collet wrench
- Spindle lock for easy stone replacement
- 5-meter long power cord



Grinding stones 3 pack	31397	1/4" .325" LowPro 3/8" LowPro 91	4,0	5/32
	32628	3/8" LowPro 90	4,5	11/64
	31396	.325"	4,8	3/16
	31398	3/8" .404"	5,5	7/32

- Fits 585015 Sure Sharp grinder

10



MAGNETIC FILE ANGLE PLATES

90610

- Attaches to the guide bar with two integrated magnets
- Lines on the plate help to align the file correctly
- 90610 has 25° angle marks on one side and 30° angle marks on the other
- 90610A has 30° and 35° angle marks

1



90610A

PRODUCT NAME	OREGON	SPECIFICATIONS	
--------------	--------	----------------	---



FILING CLAMP

26368A

- To be secured on a wood stump for for easy and precise chain maintenance

12




FILING GUIDE

557849

- Easy to install on the saw guide bar with the chain in place
- For accurate and consistent sharpening
- File not included

6

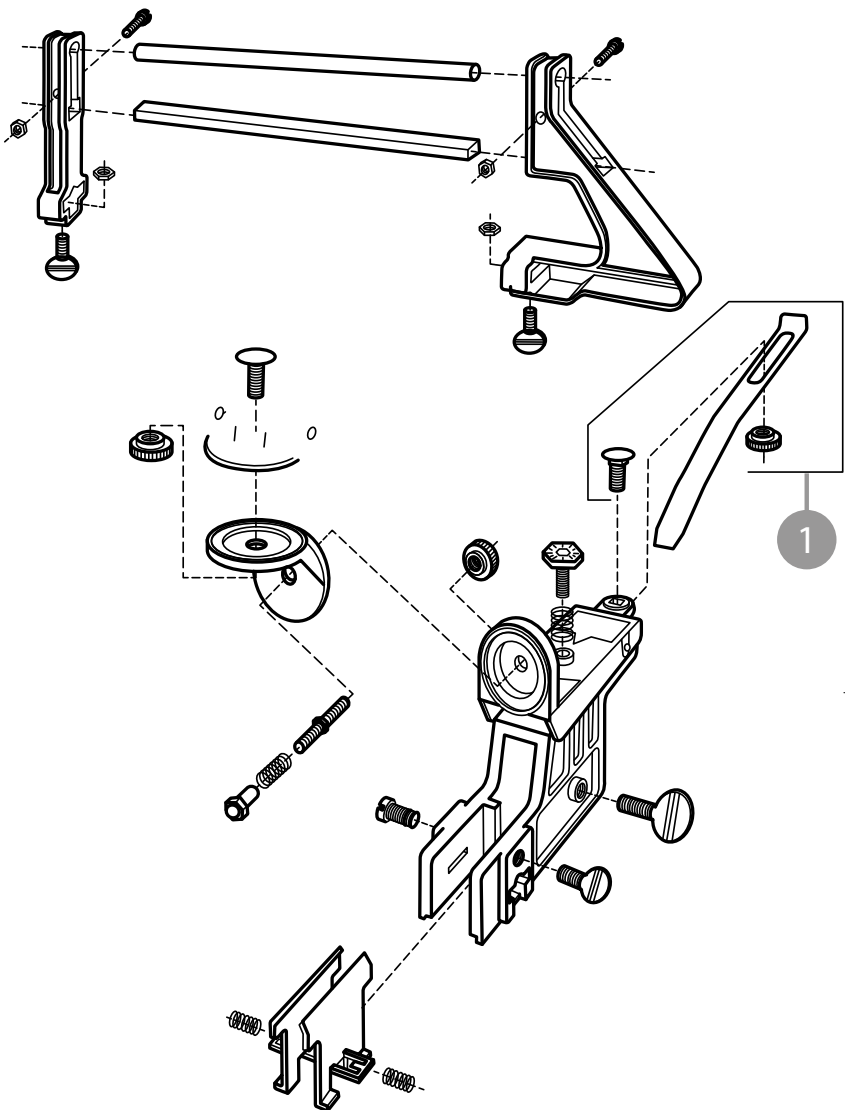

N°	DESCRIPTION	OREGON
1	STOP-SPRING KIT	39495

PRODUCT NAME	OREGON	SPECIFICATIONS	
--------------	--------	----------------	--



CHAIN MEASURING TOOL


Pocket-size
Chain measuring
tool

556418

Pocket-sized gauge for quick and easy identification. Measures the following:

- A. Chain pitch
- B. Chain gauge
- C. Bar groove width
- D. File size

50

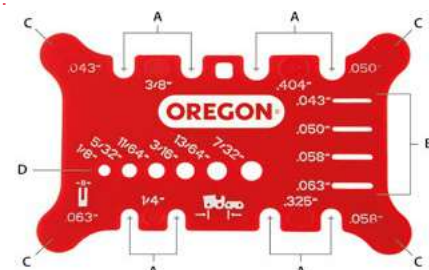

GREASE GUN

Grease gun


21939

250

Grease gun
and grease sachet
(blister pack)

90484

- To grease bar noses
- Reduces friction and enhances performance in a variety of chainsaw applications
- Helps prevent premature wear



Red fluid grease
sachet

90476

100



BAR GROOVE CLEANER

13616

- Cleans bar grooves and oil holes

300



BAR COVERS

38614

- 35 cm
- Protects chain and bar from damage and accidental contact

48

28934

- 40 cm
- Protects chain and bar from damage and accidental contact

24

28933

- 50 cm
- Protects chain and bar from damage and accidental contact

24



PRODUCT NAME	OREGON			SPECIFICATIONS	
			MM INCH		



CHAIN GRINDERS

Compact Bench grinder

590181


1/4",
.325" LowPro
3/8" LowPro 90
3/8" LowPro 91
.325"
3/8"
.404"

1,1
mm
▼
2,0
mm

.043"
▼
.08"

- Single phase, direct-drive, one way, 230V-AC, 50 Hz, 85 watt
- Manual chain clamping vise
- Ideal for chainsaw owners and small workshops
- Includes two grinding wheels (3,2 mm and 4,7mm)
- Net weight 2 kg

6

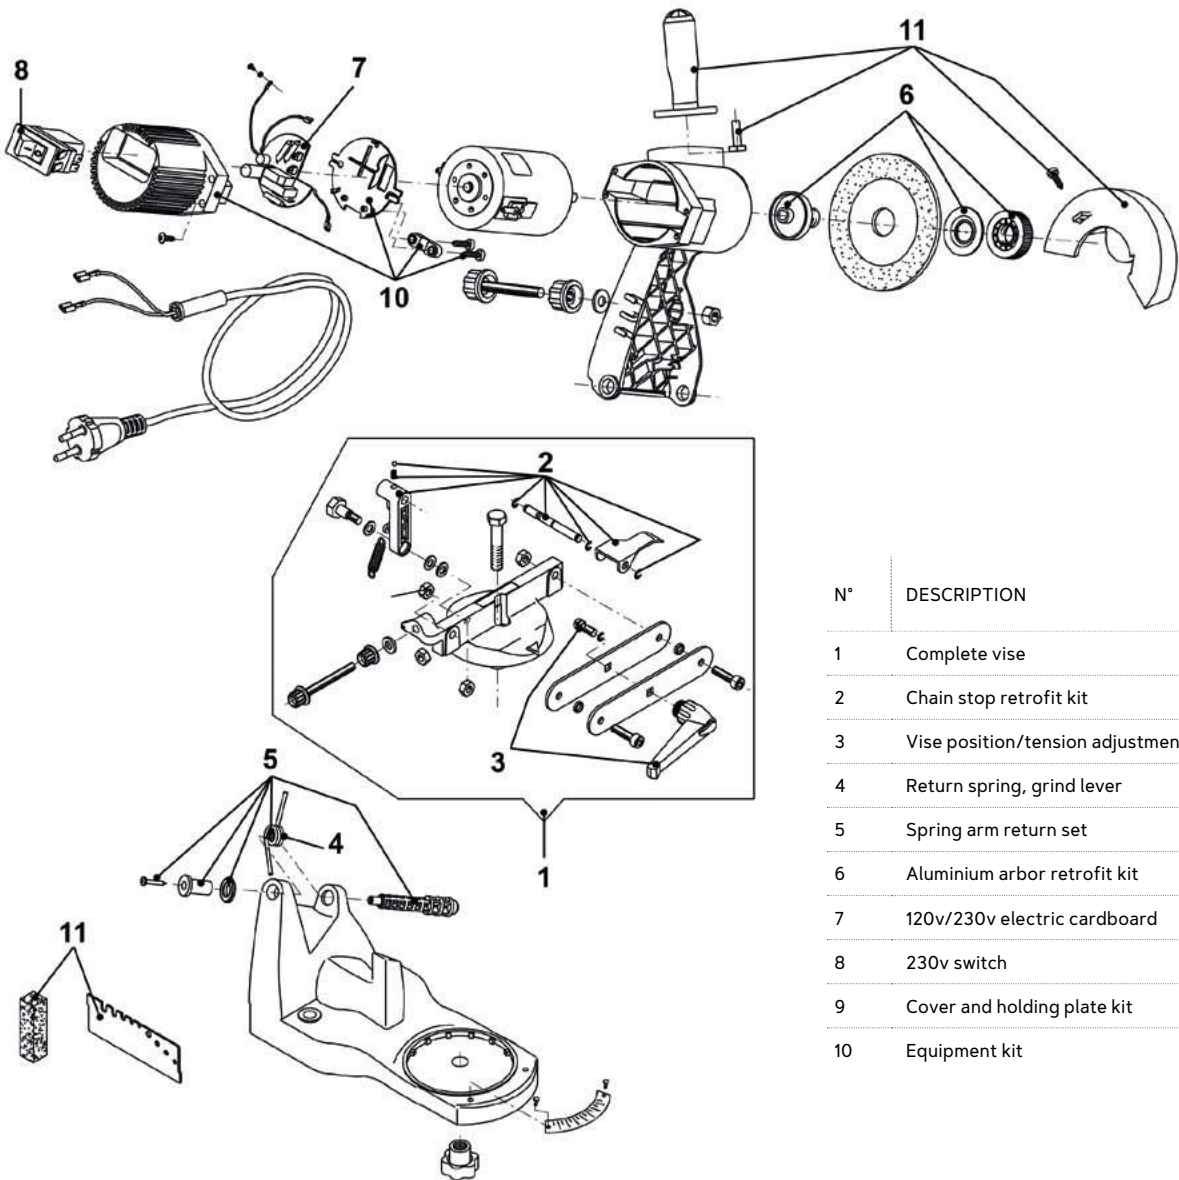

N°	DESCRIPTION	OREGON
1	Complete vise	108476
2	Chain stop retrofit kit	110579
3	Vise position/tension adjustment knob	109171
4	Return spring, grind lever	109175
5	Spring arm return set	537888
6	Aluminium arbor retrofit kit	111941
7	120v/230v electric cardboard	519971
8	230v switch	295387A
9	Cover and holding plate kit	111014
10	Equipment kit	554650

PRODUCT NAME	OREGON				SPECIFICATIONS	
			MM	INCH		



Professional Compact Bench Grinder


410-230

1/4",
.325" LowPro
3/8" LowPro 90
3/8" LowPro 91
.325"
3/8"
.404"

1,1
mm
▼
2,0
mm

.043"
▼
.08"

- Single phase, direct-drive, one way, 230V-AC, 50 Hz, 214 Watt
- Sharpens up to .404" pitch chain
- Manual chain clamping vise
- Includes three grinding wheels (3,2mm, 4,7mm, 8 mm)
- Easy to use adjustments
- Built-in light and one-way motor rotation for safe operation
- 7,3 kgs weight and 41 cm height.

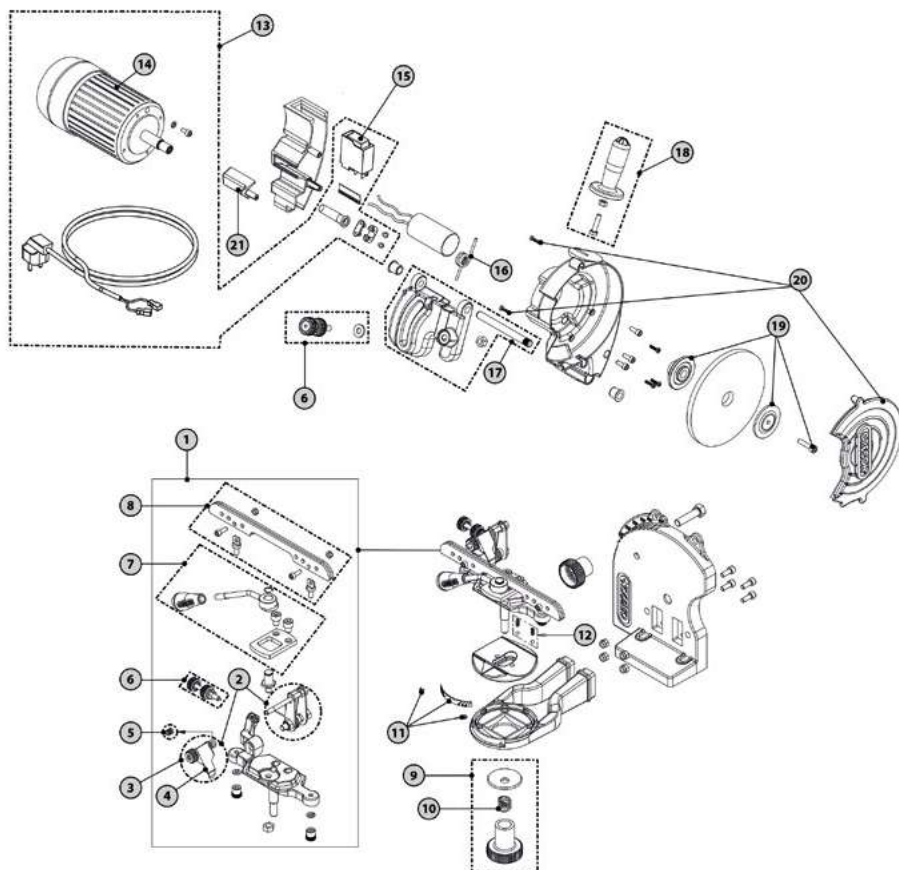

N°	DESCRIPTION	OREGON
1	Complete vise assembly	572119
2	Chain hold kit	537411
3	Chain stop vise assembly	522688
4	Chain stop (5 pk)	32677
5	Pawl center spring kit (5 pk)	32681
6	Adjustment knobs kit	572522
7	Lever vise assembly chain locking	572202
8	Vise jaws	572203
9	Vise locking kit	572524
10	Spring	35590
11	Scales	572525
12	Spring and ball kit	32678
13	E-motor, switch, cables kit	581321
14	End motor cap	572526
15	Switch 230v (new type)	295387A
16	Spring arm return	572527
17	Bracket arm support	572529
18	Handle kit	105538
19	Motor flange kit	537409
20	Metal shield	572528
21	Led light and cover	582332

PRODUCT NAME	OREGON				SPECIFICATIONS	
			MM	INCH		

OREGON

Professional Bench Grinder

520-230

1/4",		
.325" LowPro	1,1	.043"
3/8" LowPro 90	mm	
3/8" LowPro 91	▼	▼
.325"	2,0	.08"
3/8"	mm	
.404"		

- Single phase, direct-drive, one way, 230V-AC, 50 Hz, 214 Watt
- Sharpens up to .404" pitch chain (for 3/4" chain, use Oregon 571887 adaptor kit)
- Manual chain clamping vise
- Forward/aft sliding vise for a perfect centering and accurate grinding
- Includes three grinding wheels (3,2mm, 4,7mm, 8 mm)
- Easy to use adjustments
- One-way motor rotation for safe operation
- Built-in light for better visibility
- 7,3 kgs weight and 41 cm height

(3/4 pitch adaptor kit for 520-230 not included)




571887

3/4"

.122"

- 3/4" adaptor kit for bench grinder 520-320

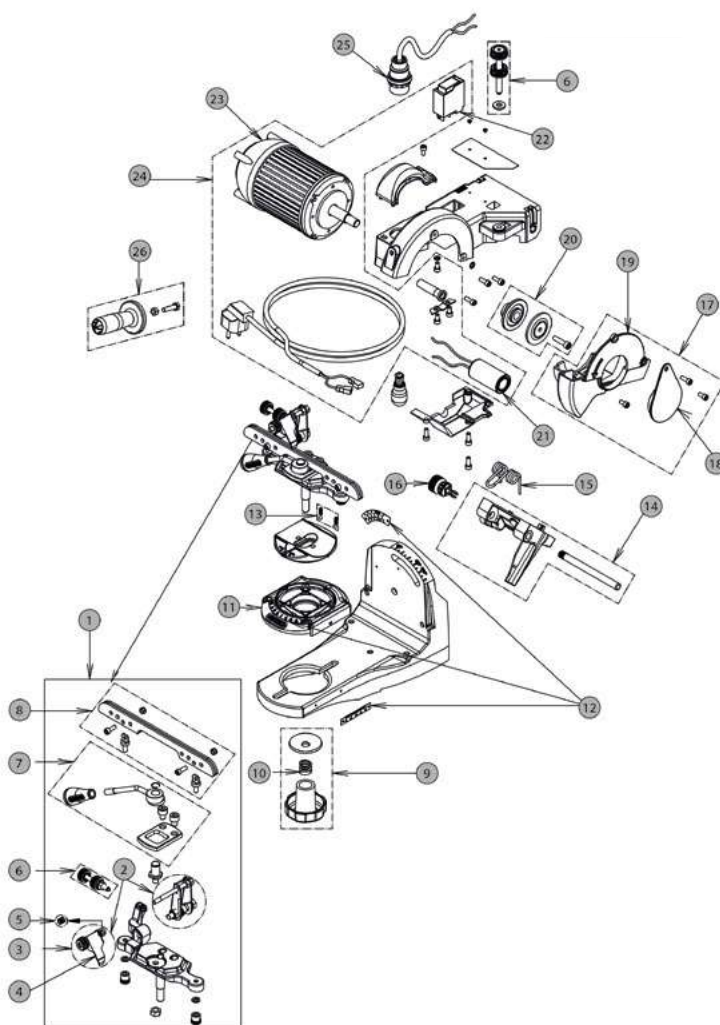

N°	DESCRIPTION	OREGON
1	Complete vise assembly	572119
2	Chain hold kit	537411
3	Chain stop vise assembly	522688
4	Chain stop	32677
5	Pawl center spring kit	32681
6	Adjustment knobs kit	537412
7	Lever vise assembly chain locking	572202
8	Vise jaws	572203
9	Vise locking kit	537413
10	Spring	35590
11	Sliding support	522685
12	Scales kit	537410
13	Spring and ball kit	32678
14	Bracket arm support	522649
15	Spring arm return	522651
16	Safety pin	522670
17	Shield wheel protector	554651
18	Shield kit	105654
19	Metal shield	109248
20	Motor flange kit	537409
21	Capacitor	295386A
22	Switch	295387A
23	End motor cap	37947
24	Complete electrical assembly	581054
25	Light socket	108505
26	Handle kit	105538

PRODUCT NAME	OREGON				SPECIFICATIONS	
			MM	INCH		


OREGON

Professional Hydraulic assist Bench Grinder

620-230

1/4",		
.325" LowPro		
3/8" LowPro 90	1,1 mm	.043"
3/8" LowPro 91		
.325"	▼	▼
3/8"	3,1 mm	.122"
.404"		
3/4"		

- Single phase, direct-drive, one way, 230V-AC, 50 Hz, 214 Watt
- Hydraulic assist for hands-free automatic vise clamping
- Delivers precision and accuracy on all chain pitches up to 3/4"
- Wide clamping area and clear markings for easy adjustments
- Includes three grinding wheels (3.2mm, 4.7mm, 8 mm)
- Built-in 15 watt light for better visibility
- 7,7 kg weight and 48 cm height

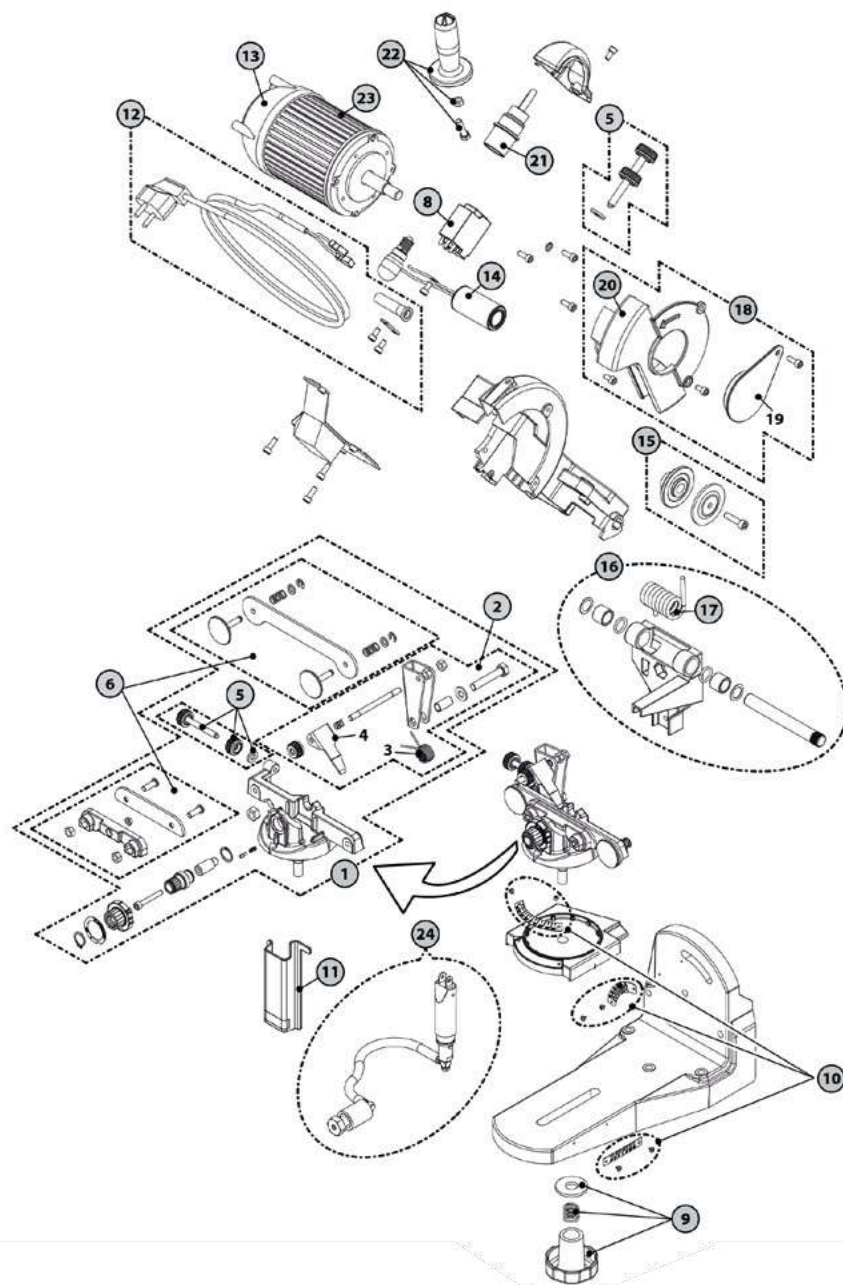

N°	DESCRIPTION	OREGON
1	Vise support	546949
2	Vise adjust. Spring	546945
3	Chain stop spring	35606
4	Longer pawl	546948
5	Adjustment knobs, kit	537412
6	Complete vise kit	546947
7	Switch 230v	295387A
8	Vise locking kit	537413
9	Scales kit	537410
10	Cylinder protection	546952
11	Cable kit complete with plug - 230v	295389A
12	End motor cap	37947
13	Capacitor 230v	295386A
14	Motor flange kit (outer and inner)	537409
15	Arm support assembly	546951
16	Head return spring	546946
17	Shield wheel protector	554651
18	Shield kit	105654
19	Metal shield	109248
20	Light socket e14 w/wires - 230v	108505
21	Handle kit	105538
22	E-motor 230v	295388A
23	Complete hydraulic a.Bly	546950

PRODUCT NAME	OREGON		 MM	SPECIFICATIONS	
--------------	--------	---	---	----------------	---



105MM GRINDING WHEELS

5-pack	106547P	1/4" .325" LowPro 3/8" LowPro 90 3/8" LowPro 91	105	22,2	3,2	
4-pack	106548P	.325" 3/8" .404"	105	22,2	4,7	• Resists burning of the cutters and leaves a precision finish • Suitable for Oregon 590181 Compact Bench Grinder • Grinding wheel 106547P can also be used for 325" pitch chain as an alternative
3-pack	106549P	All*	105	22,2	6	

*DEPTH GAUGE GRIND ONLY



PRODUCT NAME	OREGON		 MM	SPECIFICATIONS	
--------------	--------	---	---	----------------	---



145MM GRINDING WHEELS

5-pack	32659P	1/4" .325" LowPro 3/8" LowPro 90 3/8" LowPro 91	145	22,3	3,2	• High quality corundrum (Aluminium oxide) grinding wheels • Medium density for "lightly" damaged chains • Resists burning of the cutters and leaves a precision finish • Suitable for Oregon 620-230, 520-230 and 410-230 chain grinders • Grinding wheel 32659P can also be used for 325" pitch chain as an alternative	5
4-pack	32660P	.325" 3/8" .404"	145	22,3	4,7		
3-pack	32661P	All*	145	22,3	6		
1-pack	OR534-516	3/4"	145	22,3	7,9		


*DEPTH GAUGE GRIND ONLY



PRODUCT NAME	OREGON			SPECIFICATIONS	
--------------	--------	---	---	----------------	---

CHAIN BREAKER

Chain breaker	24548B	1/4"	1,1 mm ▼ 2,0 mm	- Complete product including punch 38594 and anvil 111939 - Easy operating lever action and ergonomic handle	10
		3/8" LowPro 90 3/8" LowPro 91 .325" 3/8" .404"			

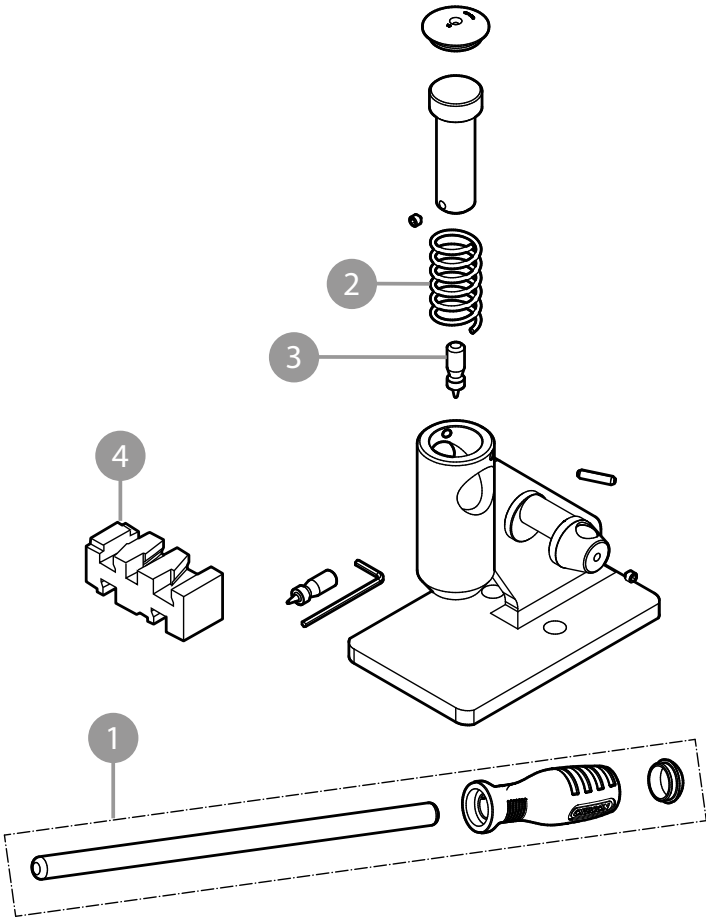

N°	DESCRIPTION	OREGON
1	Handle assembly	572121
2	Spring	38593
3	Standard punch	38594
4	5 Slots anvil	111939

Punch	109644	1/4" 3/8" LowPro 90	Punch for chain breaker 24548B
	38594	1/4" 3/8" LowPro 90 3/8" LowPro 91 .325", 3/8", .404"	

Anvil	111939	1/4" 3/8" LowPro 90 3/8" LowPro 91 .325", 3/8", .404"	- Slotted anvil for chain breaker 24548B - Adjustable anvil for chain breaker 24548B
	105530	1/4" 3/8" LowPro 90 3/8" LowPro 91 .325", 3/8", .404"	



PRODUCT NAME	OREGON			SPECIFICATIONS	
--------------	--------	---	---	----------------	---

HEAVY-DUTY CHAIN BREAKER

Heavy-duty Chain breaker


24548-SI

1/4"
3/8" LowPro 90
3/8" LowPro 91
.325"
3/8"
.404"
3/4"

1,1 mm
▼
3,1 mm

- Multi-purpose tool to break all chain pitches (including 3/4")
- Can also be used to drive out bar nose rivets, including those on big 3/4" pitch harvester bars
- Heavy-duty materials and top quality components for a long service time
- Includes punches for all chain types
- Anvils for 3/4" pitch chain (25049) and for harvester bar noses (505033) must be purchased separately

1

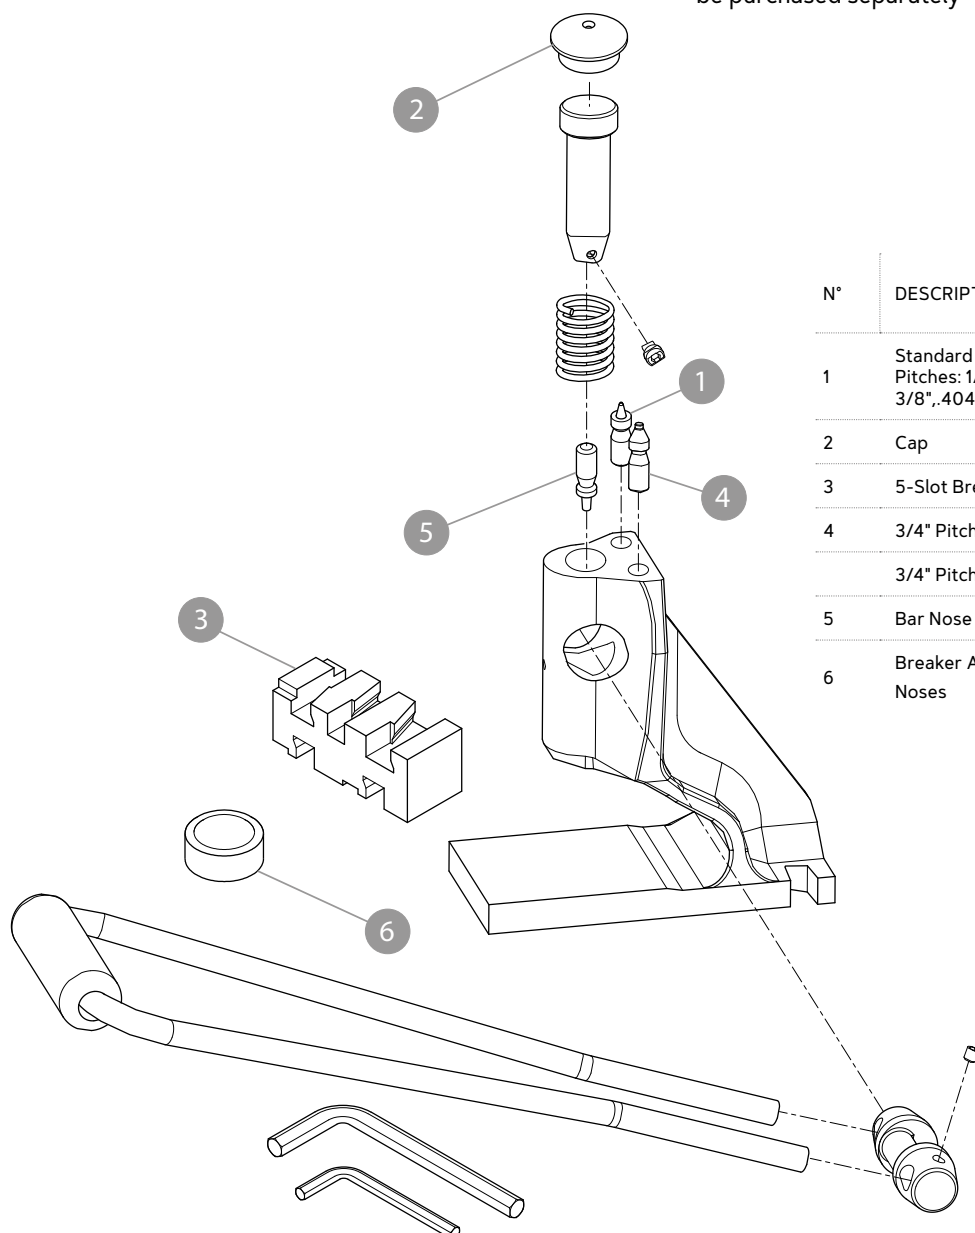


N°	DESCRIPTION	OREGON
1	Standard Chain Punch for Chain Pitches: 1/4", 3/8 Low Profile, .325", 3/8", .404"	38594
2	Cap	38595
3	5-Slot Breaker Anvil	111939
4	3/4" Pitch Chain Punch	110438SI
	3/4" Pitch Breaker Anvil	25049
5	Bar Nose Rivet Punch	102623SI
6	Breaker Anvil for Harvester Bar Noses	505033

MANUAL RIVET SPINNER

Rivet spinner	24549B	1/4" 3/8" LowPro 90 3/8" LowPro 91 .325" 3/8" .404"	1,1 mm ▼ 2,0 mm
	38599	3/8" LowPro 90 3/8" LowPro 91 .325" 3/8" .404" 1/2"	

- Complete product including spinner anvils and take-up handles
- Ergonomic handle design
- Produces consistent rivet spins and minimizes risk of chain breakage

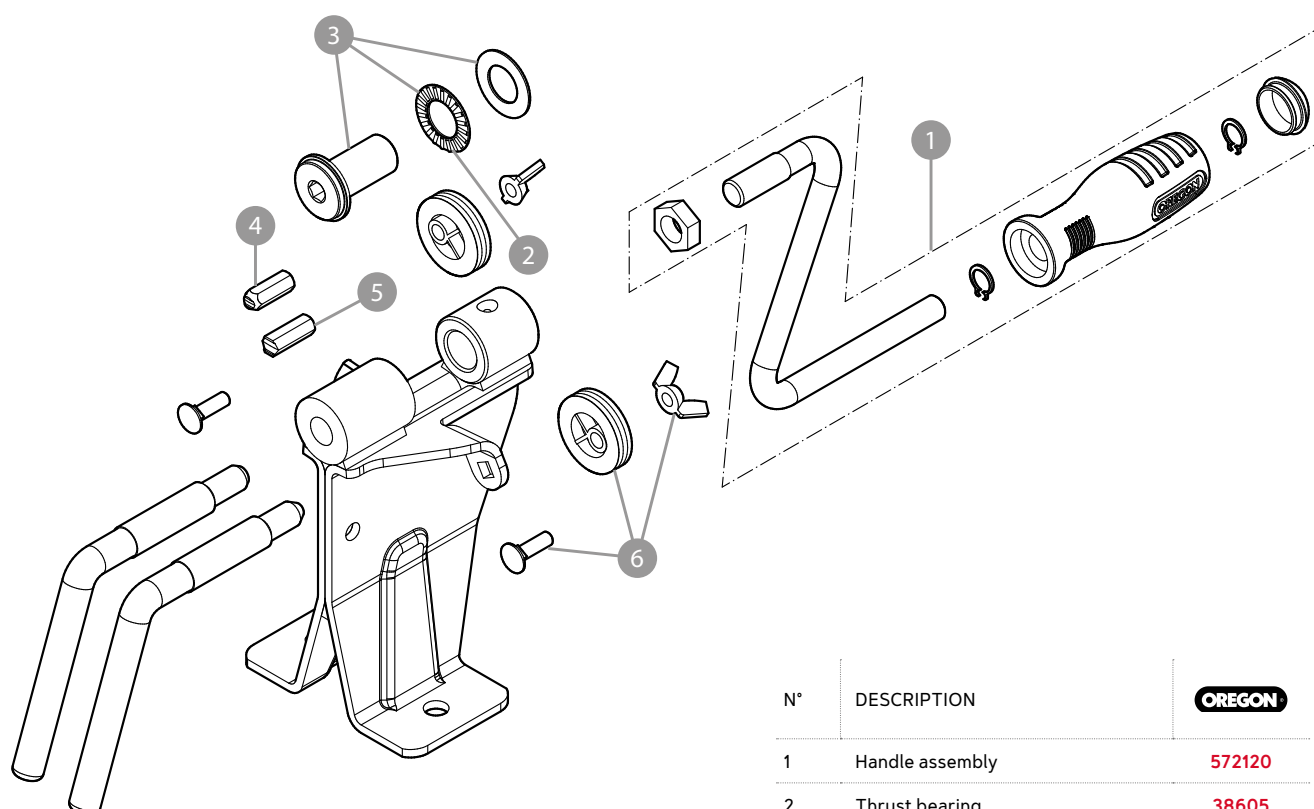

N°	DESCRIPTION	OREGON
1	Handle assembly	572120
2	Thrust bearing	38605
3	Sleeve + bearing + washer	38604
4	A" spinner anvil for for 3/8" and .404" pitch chains	38597
5	"B" Spinner anvil for 1/4", 3/8" LowPro 90-91, .325"	38598
6	Chain support disc.+Bolt+nut	38603

PRODUCT NAME	OREGON			SPECIFICATIONS	
-----------------	--------	---	---	----------------	---



HEAVY-DUTY RIVET SPINNER


Heavy-duty
Rivet spinner

24549-SI

1/4"
3/8" LowPro 90
3/8" LowPro 91
.325"
3/8"
.404"
3/4"

1,1 mm
▼
3,1 mm

- Designed to meet all rivet spinning needs
- Spins all chain rivets up to .404" pitch
- Adapts easily for spinning 3/4" pitch rivets when used with the 3/4" pitch adapter 108742si

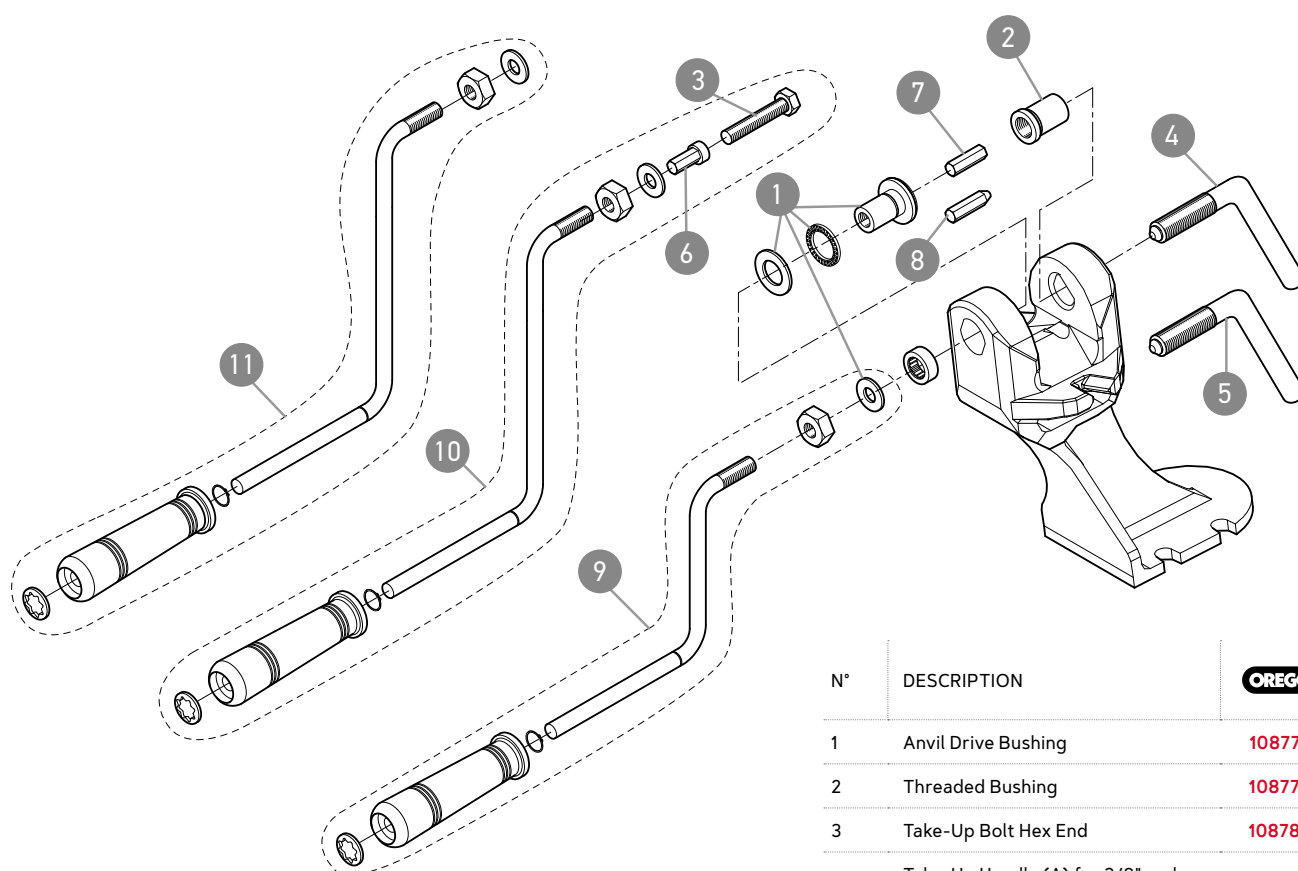


N°	DESCRIPTION	OREGON
1	Anvil Drive Bushing	108777SI
2	Threaded Bushing	108778SI
3	Take-Up Bolt Hex End	108789SI
4	Take-Up Handle (A) for 3/8" and .404" Saw Chain	108780SI
5	Take-Up Handle (B) for 1/4", 3/8" Low Profile™ and .325" Saw Chain	108781SI
6	3/4" Pitch Spinner Anvil	108790SI
7	Spinner Anvil (A) for 3/8" and .404" Saw Chain	38597
8	Spinner Anvil (B) for 1/4", 3/8" Low Profile and .325" Saw Chain	38598
9	Handle Assembly	108779SI
10	3/4" Pitch Adapter Kit (This item is not sold with the tool)	108742SI
11	Extra-Long Handle	108788SI

FILING SPECIFICATIONS


OREGON®

TECHNICAL INFORMATIONS

PROPER SHARPENING GEOMETRY FOR ALL OREGON® SAW CHAIN

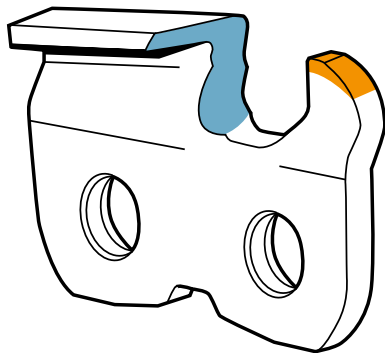

- A** Top Plate Filing Angle
- B** File Down Angle
- C** Hook angle
- D** Depth Gauge Setting

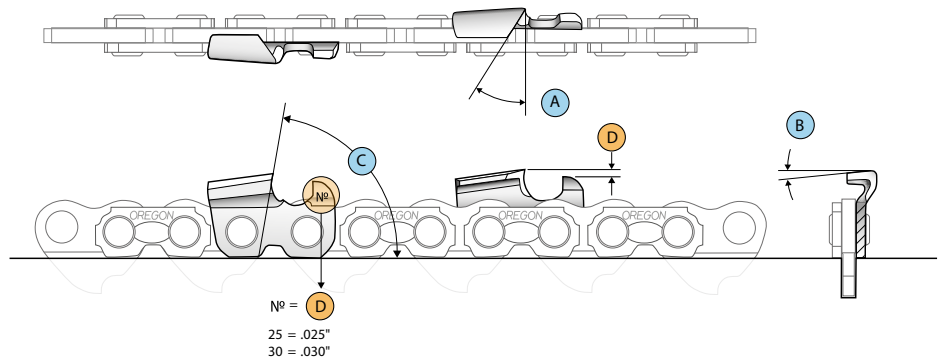

ROUND FILES

	5/32" - 4,0 mm
	11/64" - 4,5 mm
	3/16" - 4,8 mm
	7/32" - 5,5 mm

12 Pack



70504
70511
70503
70502

3 Pack



Q70509C
Q70512C
Q70508C
Q70507C

File Holder



Q16265C
Q29192C
Q18228C
Q13252C

Sharpening Kit



Q90405
Q105860
Q90407
Q90404
90406

Sharpening Kit
+ Pouch



558488
558549
558550
558551

FLAT FILE

12211 (12-Pack)



DEPTH GAUGE TOOLS

27530 (1 each)
.025"



22291 (10-Pack)
.030"






A

B

C

D

- A Top Plate Filing Angle
 B File Down Angle
 C Hook angle
 D Depth Gauge Setting



1/4" LOW PROFILE	24AP	1/8" 3,2 mm	30°	10°	85°	.020"
1/4"	25AP	5/32" ● 4,0 mm	30°	10°	85°	.025"
.325" LOW PROFILE	80TXL	5/32" ● 4,0 mm	30°	10°	70°	.025"
3/8" LOW PROFILE	90PX	11/64" ● 4,5 mm	30°	0°	75°	.025"
	91P, 91PX, 91VXL, M91VXL	5/32" ● 4,0 mm	30°	0°	80°	.025"
	91R	5/32" ● 4,0 mm	5°	0°	85°	.025"
.325"	95TXL/VPX, M95VPX 20, 21, 22BPX	3/16" ● 4,8 mm	30°	10°	70°	.025"
	20, 21, 22LPX/LGX M20, 21, 22LPX	3/16" ● 4,8 mm	25°	10°	60°	.025"
3/8"	72, 73, 75EXL/EXJ LGX/LPX M72, M73, M75LPX	7/32" ● 5,5 mm	25°	10°	60°	.025"
	72, 73, 75 DX/DPX	7/32" ● 5,5 mm	30°	10°	80°	.025"
	72, 73, 75RD	7/32" ● 5,5 mm	10°	10°	75°	.025"
.404"	26, 27X	7/32" ● 5,5 mm	30°	10°	65°	.030"
	27R	7/32" ● 5,5 mm	10°	10°	75°	.030"
	58, 59L	7/32" ● 5,5 mm	25°	10°	60°	.025"
	59ACL	7/32" ● 5,5 mm	35°	10°	90°	.035"
	18HX, 19HX	7/32" ● 5,5 mm	35°	10°	80°	.050"
3/4"	11H	5/16" ● 7,9 mm	30°	0°	80°	.070"

1 When using an Oregon® file holder, ALWAYS hold it level, 0-degrees flat on the Top Plate.


2 Flat File must be used in combination with Oregon Depth Gauge Tools.

GRINDING SPECIFICATIONS


OREGON®

TECHNICAL INFORMATION

PROPER GRIND ANGLES FOR ALL OREGON® SAW CHAIN

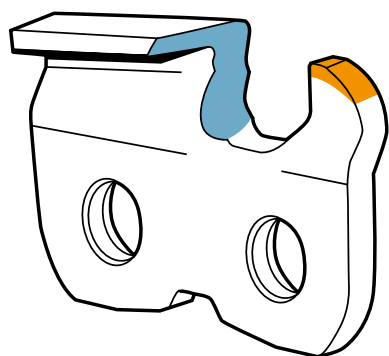

- A Top Plate Filing Angle
- B File Down Angle
- C Hook angle
- D Depth Gauge Setting

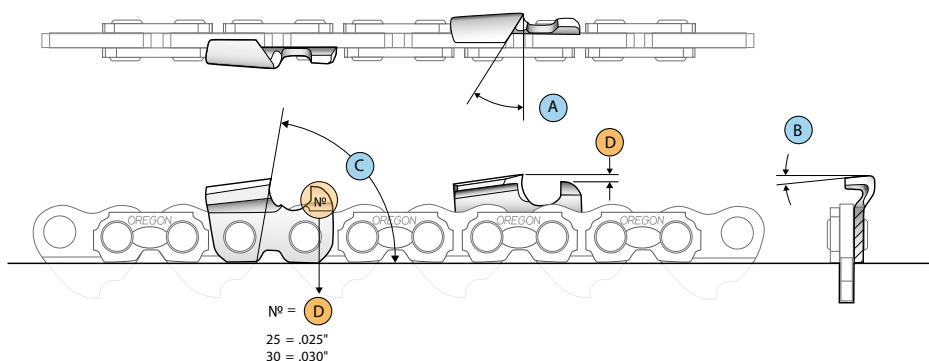

Compact bench grinder

590181

1/4" ▶ .404" 1,1 ▶ 2,0



105 mm

Professional compact bench grinder

410-230

1/4" ▶ .404" 1,1 ▶ 2,0



145 mm



Professional bench grinder

520-230

1/4" ▶ .404" 1,1 ▶ 2,0
(3/4) 3,1



145 mm

Professional hydraulic assist bench grinder

620-230

1/4" ▶ 3/4" 1,1 ▶ 3,1



145 mm



- A Top Plate Grinding Angle
- B Vise Tilt Angle
- C Grinding Wheel Angle
- D Depth Gauge Setting





|←X→|



145 mm



105 mm



Chain Type

1/4" LOW PROFILE	24AP	32659P	106547P	3,2 mm	30°	10°	55°	.020"	27530
	25AP	32659P	106547P	3,2 mm	30°	10°	55°	.025"	27530
.325" LOW PROFILE	80TXL	32659P	106547P	3,2 mm	30°	10°	70°	.025"	27530
3/8" LOW PROFILE	90PX 91P, 91PX 91VXL, M91VXL	32659P	106547P	3,2 mm	30°	0°	55°	.025"	27530
	91R	32659P	106547P	3,2 mm	5°	0°	55°	.025"	27530
.325"	95TXL/VPX, M95VPX 20, 21, 22BPX	32660P	106548P	4,7 mm Alternative 3,2 mm	30°	10°	55°	.025"	27530
	20, 21, 22LPX/LGX M20, 21, 22LPX	32660P	106548P	4,7 mm Alternative 3,2 mm	25°	10°	55°	.025"	27530
3/8"	72, 73, 75EXL/EXJ LGX/LPX M72, M73, M75LPX	32660P	106548P	4,7 mm	25°	10°	55°	.025"	27530
	72, 73, 75 DX/DPX	32660P	106548P	4,7 mm	30°	10°	55°	.025"	27530
	72, 73, 75RD	32660P	106548P	4,7 mm	10°	10°	50°	.025"	27530
.404"	26, 27X	32660P	106548P	4,7 mm	30°	10°	55°	.030"	22291 10-PACK
	27R	32660P	106548P	4,7 mm	10°	10°	50°	.030"	22291 10-PACK
	58, 59L	32660P	106548P	4,7 mm	25°	10°	55°	.025"	27530
3/4"	59ACL	32660P	106548P	4,7 mm	30°	10°	60°	.035"	-
	18HX, 19HX	32660P	106548P	4,7 mm	35°	10°	60°	.050"	38850 10-PACK
	11H	OR534-516	—	7,9 mm	30°	0°	50°	.070"	-







75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged. Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents. Engineering is the bedrock of our reputation.



PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS.

OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2024 - AD100-003-EN



Discover more of our products at
OregonProducts.com

OREGON®

TOOLS AND ACCESSORIES

TA_1.2
EN/EUR







OREGON®

OREGON®

NEW

HAND SAWS

Superior cutting performance and ergonomics

Get your cutting done easier and faster. The new Oregon® arborist saws provide superior cutting performance and ergonomics to increase work efficiency and minimise fatigue.

CURVED HAND SAW 33CM/13" (Includes Scabbard for Blade)

600136

Japanese premium high carbon steel

Impulse hardened with 6.5 teeth per inch

Durable polypropylene handle and sheath

Replaceable curved blade 33cm/13-Inch

600139

- Replaceable blade available separately for purchase
- Chrome plated for rust prevention
- Taper ground blade to reduce friction and last longer compared to set teeth blades



STRAIGHT HAND SAW 30CM/12"

(Includes Scabbard for Blade)

600138

Blade tang spans the full length of the handle and is attached with two screws for strong and reliable attachment



600140



The Oregon logo, featuring the word "OREGON" in white, bold, sans-serif capital letters inside a red rounded rectangle. A small registered trademark symbol (®) is located to the upper right of the word.

MARKING SPRAY

Luminous and durable marking

Featuring a wide variety of classic and fluorescent colors, Oregon marking sprays are specifically designed for outdoor applications, providing an excellent resistance to ultraviolet and adverse weather conditions and a durability of up to **2 years**. Their ergonomic and multi-directional cap can be used upside down and the color dries fast even on wet surfaces, making them an extremely versatile product for all working conditions.

The Oregon multipurpose marking sprays are suitable for a wide variety of applications, including tree and log marking, road works, building, construction...





519410



519411



519412



519413



519441



519414



519415



TOOL BELTS

Tools belt
with harness
and holster set

584147

- Polyester fabric belt with high resistance to abrasion
- Comfortable foam belt
- Adjustable harness on front and back
- Reflective stripes for higher visibility
- Marking spray holster
- Spanner, wedge & lifting tongs holster
- File holder, flat file, spanner, safety aid kit and logger tape holster
- Hook, wedge and logger tape holster

10



PRODUCT NAME	OREGON	SPECIFICATIONS	
--------------	--------	----------------	--



MARKING SPRAYS

Red fluo	519410	
Green fluo	519411	
White	519412	• 500ml cans • Temporary marking up to 2 years • Ergonomic and multi-directional cap, can be used upside down • Very good resistance to ultraviolet and adverse weather conditions • Free of fluorocarbons and heavy metals • Rapid drying even on wet surfaces • Reliable operation with a constant flow
Orange fluo	519413	
Yellow fluo	519414	
Blue fluo	519415	
Pink fluo	519441	



12



MARKING CRAYONS

White	295364	
Blue	295360	
Red	295361	• Pack of 12 crayons • Diameter 12mm; length 120mm • Six-sided shape to prevent rolling • Allows writing and marking on: wood, metal, stone, concrete, tiles, ceramic, plastic, glass, rubber...
Green	295362	
Yellow	295363	
Black	295365	
Crayon holder	520272	• For round and hexagonal 10-12mm crayons • Avoids dirty hands when using the crayon • Made of durable metal, fits into pocket with clip

36



10



PRODUCT NAME	OREGON	 M	SPECIFICATIONS	
--------------	--------	--	----------------	---




LOGGER TAPES

	106510	15m	24	
	106512	20m	24	
Logger Tape				• Heavy-duty gears for smooth operation • Powerful auto-rewind spring • Strong, nylon coated metal tape with clear graduations and markings • Release nail to better secure tape end on wood • Hanger suitable for use with tool holster 41898 and tools belt 584147
	106513	25m	12	



N°	DESCRIPTION	106510 15m	106512 20m	106513 25m
1	Post screw	106482	106482	106482
2	Gear housing with bearing		106473	106474
3	Main shaft and gear	106477	106477	106477
4	Idler gear and pinion	106478	106478	106478
5	Idler bearing with screw, nut			
6	Gear cover plate	106466	106466	106467
7	Nylon guide post with screws	106480	106480	106480
8	Spacer post with 2 screws	106495	106495	106495
9	Tape refill screw	106483	106483	106483
10	Release hook	106492	106492	106492
11	Tape refill blade with release hook	106459	106461	106463
12	Spool with pinion gear			106476
13	Spring cover plate with bearing	106468	106468	106469
14	Spring assembly complete			
15	Hanger and swivel clip	106494	106494	106494
16	Locking ring	106464	106464	106465
17	1/2 metre plastic end			
17	1 metre plastic end			
18	Hinge			
19	Rubber stop			
20	Extra long eyelets			
Not illustrated	Tape repair end 19" with release hook	106489	106489	106489
	25 metre bulk leader tape		106490	106490

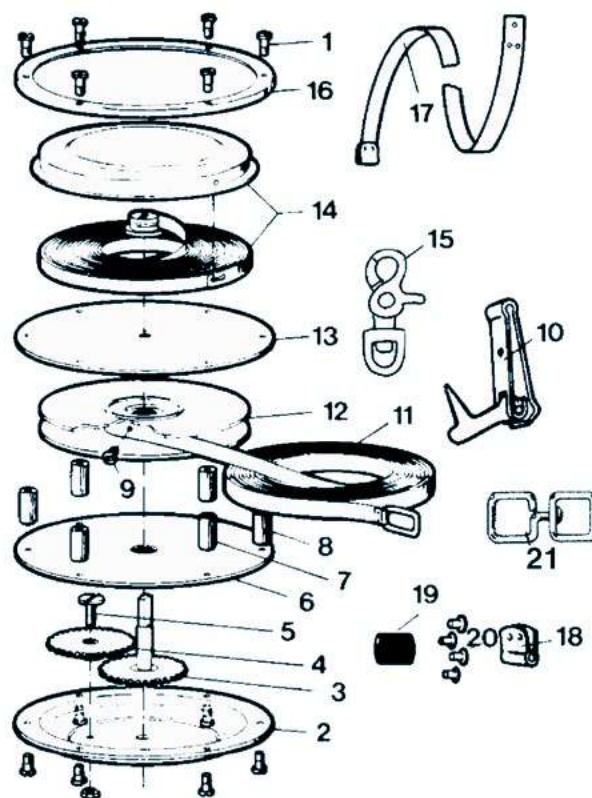

PLASTIC FELLING WEDGES

561109

14

5 1/2"

180



570726

20

8"

12



Plastic

Felling

Wedges

- Strong, tough and lightweight
- Serrations hold wedge in the tree securely
- Highly resistant polyamid material for 561109 and 570726

23560

25

10"

12



26782

30

12"

12



FELLING LEVERS

Felling Lever	536304	• Heavy-duty forged lever • Sliding, forged cant hook • Bent handle provides extra leverage • Comfortable non-slip handle • Length: 80 cm • Weight: 2,4 kg	10	
	536305	• Heavy-duty forged lever • Sliding, forged cant hook • Bent handle provides extra leverage • Comfortable non-slip handle • Length: 130 cm • Weight: 3,5 kg		
	541248	• Sliding Part	1	

LIFTING PICKS

Lifting Pick	536319	• Ergonomic, lightweight aluminium handle • Sharp tip grips the wood easily • Non-slip handle with stop end • Notches for extra grip in frozen wood • Length: 50 cm • Weight: 0,45 kg	40	
	536320	• Ergonomic, lightweight aluminium handle • Sharp tip grips the wood easily • Non-slip handle with stop end • Notches for extra grip in frozen wood • Length: 70 cm • Weight: 0,54 kg		

LIFTING HOOKS

Lifting hook	536308	• Forged steel hook • Non-steel ergonomic plastic handle • Weight: 0.35 kg	 40	
Lifting hook with transverse handle	536307	• Forged steel hook • Non-steel ergonomic plastic handle • Weight: 0.45 kg	 30	

LIFTING TONGS

	536321	• Forged steel tong • 180mm jaw opening • Non-slip ergonomic leather handle • Weight: 0.485 kg	 30	
Lifting Tong	536306	• Forged steel tong • 265 jaw opening for handling large logs • Non-slip comfortable handle • Weight: 0.95 kg	 20	




SAW HORSES

Eco
saw horse

584145

- Foldable and light, easy to carry and store
- Maximum load 80kg
- Adjustable height and width
- With teeth to keep the wood stable when cutting

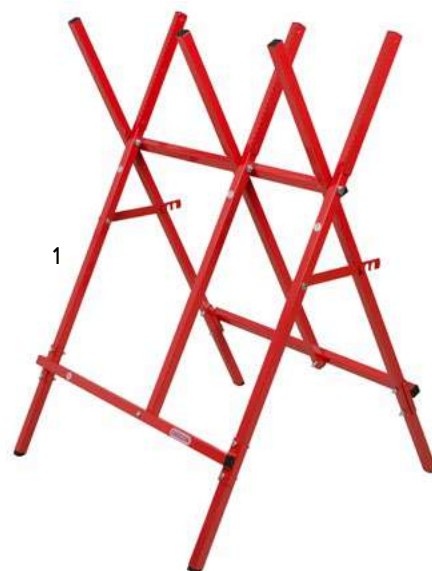

Heavy duty
saw horse

584146

- Highly stable construction and design
- Laminated steel to provide high resistance
- High wood capacity load (maximum 160 kg)
- Easy to mount



PRODUCT NAME	OREGON	25 26		SPECIFICATIONS	
		MM	INCH		



HAND SAWS

Curved
hand saw

600136

33

13

- Japanese premium high carbon steel
- Impulse hardened with 6,5 teeth per inch
- Chrome plated for rust prevention
- Tri-edge teeth with 3 cutting angles for a smooth and clean cut
- Ergonomic handle
- Includes scabbard with leg straps



10

Straight
hand saw

600138

30,5

12



600139

33

13

- Curved replacement blade



600140

30,5

12

- Straight replacement blade



600137

- Replacement Nuts for handle



PRODUCT NAME	OREGON	CAPACITY	SPECIFICATIONS	
--------------	--------	----------	----------------	--



FUEL & CHAIN OIL COMBI-CANS

Combi-can Red	562410	3L + 1,5L	• Holds 3 litres of fuel and 1,5 litres of chain oil • Measuring scale on both cans • Safety cap	6	
Combi-can White	562409	3L + 1,5L			
Combi-can Red	562407	5L + 3L	• Holds 5 litres of fuel and 3 litres of chain oil • Measuring scale on both cans • Safety cap	4	
Combi-can White	562408	5L + 3L			
Combi-can Red	562405	6L + 3L	• Holds 6 litres of fuel and 3 litres of chain oil • Measuring scale on both cans • Safety cap • Large handle. Easy to transport even with logger gloves	6	
Combi-can White	562406	6L + 3L	• Low profile for high stability • Tool bag available (542035)		
Safety spout	562611		• Universal safety spout for fuel	10	
	562612		• Universal safety spout for chain oil		

PRODUCT NAME	OREGON	CAPACITY	SPECIFICATIONS	
--------------	---------------	----------	----------------	---



FUEL-CANS

NOT SOLD IN U.K.

Fuel can
5L Red
+ flexible spout

O42-970

5 L

- Conform to rigorous UN/
BAM Safety regulations

12



Fuel can
5L Green
+ flexible spout

O42-971

5 L

- Conform to rigorous UN/
BAM Safety regulations

12

Fuel can
5L White
+ flexible spout

O42-972

5 L

- Conform to rigorous UN/
BAM Safety regulations

12



Fuel can
10 L
Red

O42-973

10 L

- Conform to rigorous UN/
BAM Safety regulations

6



Fuel can
10 L
Black

O42-974

10 L

- Conform to rigorous UN/
BAM Safety regulations

6



Fuel can
20 L
Black

O42-975

20 L

- Conform to rigorous UN/
BAM Safety regulations

4



Funnel with filter

O42-978

16cm

- Suitable for use with
Oil and Fuel
- Plastic

1



PRODUCT NAME	OREGON	CAPACITY	SPECIFICATIONS	
--------------	--------	----------	----------------	--

SPRAYERS

Sprayers 16 L	518769	16 L	• Non-Pressurised tank type. Working capacity 16 or 20 litres • Pressurised chamber capacity 0.9 Litres • Max working pressure 0.2 – 0.3 Mpa • Maximum pressure 1.0 Mpa • Includes lance and 2 adjustable spray nozzles • Total length of flexible tube and spray lance +/- 2.0 Metres • Shoulder strap, spare seal kit included • Easy to store • Complies with 2006/42/EC • 3.6 kgs (16 L) • 3.7 kgs (20L)	1
Sprayers 20 L	518771	20 L		1
	525753		• Seals, Gaskets, Nozzle and elbow kit	1
	572030		• Metal Wand	
	572037		• Hose	
	572018		• Air chamber pressure lid	
	572017		• Tank lid with diaphragm	
	572031		• Sealing washer for tank lid	
	572049		• Felt washer for air chamber pressure lid	
	572015		• Pump repair kit	





HARNESS

Pro Harness

539172

- For intensive use
- Ergonomic harness with cushioned shoulder strap
- Cushioned waist belt
- Fully adjustable – evenly spreads the load over both shoulders
- Back ventilation hole
- Safety quick release system
- Thigh protection pad with release hook

10



Light Harness

Q539173

- For occasional use
- Light, double shoulder strap with thigh pad
- Easy to adjust
- Safety quick release system

28





75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged. Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents. Engineering is the bedrock of our reputation.



PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS.

OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2024 - AD100-004-EN



Discover more of our products at
OregonProducts.com



HARVESTER CHAINS AND GUIDE BARS

HAR_1.2
EN/EUR





OREGON®

SHARPER BY NATURE

1946 ushered in a better way of woodcutting when logger Joseph Buford Cox realised how easily timber-beetle larvae can chew through timber, creating the first revolutionary Oregon saw chain that duplicated their alternating C-shaped jaws in steel. From the invention of modern saw chain to research innovations that reduce injury-causing kickback, Oregon has always been the industry leader. There's a reason we're the world's number-one in saw chain, guide bars, sprockets, forestry accessories, lawnmower blades and outdoor equipment parts.



UPTIME IS THE BOTTOM LINE.

We made SpeedMax™ XL
for those who live to get
the job done right —
every cut, every day.

DETAILS AND DEPENDABILITY

They put more wood
on the ground. They
keep you in the cab. It
all translates into more
uptime, all the time.

That's why we've been
working for generations
to deliver faster, stronger,
longer-lasting cutting
systems for the most
demanding timber
harvesters in the world.

Oregon is the only
manufacturer to design a
complete saw chain, guide
bar and sprocket cutting
system for industrial
harvesting equipment.



**SPEEDMAX XL™
GUIDE BAR**
with Replaceable Sprocket Nose

SPEEDMAX™ XL

BUILT FOR YOUR TOUGHEST DAY.

The SpeedMax XL Cutting System
offers more uptime because it is
faster, stronger, and long-lasting.
It's a complete chain, bar, and
sprocket system that delivers precise,
engineered components working
together to deliver unparallel
efficiency, performance, and
durability.

**FASTER.
STRONGER.
LONG-LASTING.**

19HX SAW CHAIN

Optimized for high-flow, high-power heads and saw motors for faster cutting speed. Featuring tall chamfer chisel cutters that combine best-in-class durability with improved chip clearance to deliver faster and more consistent cuts.



INVENTORS OF THE MODERN SAW CHAIN

Almost 75 years ago, Joseph Buford Cox witnessed the sawing motion of a timber beetle larvae burrowing through a piece of wood. Curious, Joe took the larvae back to his Portland, Oregon, basement for a closer inspection. By observing C-shaped jaws under a magnifying glass, he designed, manufactured and patented the "chipper saw chain" and started the Oregon Saw Chain Company in 1947. Today, all the saw chain produced in the world utilizes the design Joe Cox developed in the 40s. Our founder's ingenuity in finding inspiration from nature to design a more efficient tool is a big part of who we are, but we are still going to push our talent, creativity and imagination to continually reimagine and redefine what is possible.



**JOSEPH B. COX
FOUNDER**

CUTTING SYSTEM



.404\"/>



OREGON®



**DESIGNED &
ENGINEERED
IN THE USA**


OREGON®

HARVESTER CHAINS




Saw Chain Terminology


PARTS OF A SAW CHAIN

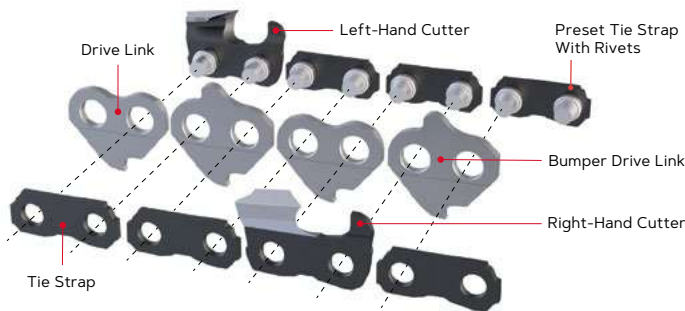

PARTS OF A CUTTER

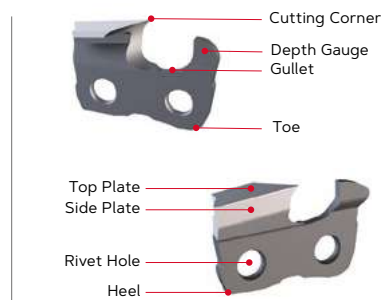

PARTS OF A RIVET



A harvesting machine is only as good as its cutting attachments. That's why discerning consumers choose Oregon®. Our harvester bars, chains and sprockets make your machine rise to its potential -maximizing your cutting efficiency while minimizing your down time.




PATENTED STEEL

All of our harvester chain is built with patented Oregon® OCS-01 steel, which was developed specifically for use in high performance applications.




INDUCTION HARDENING

Induction Hardening: Increase the longevity of your bar with precision heat-treated rails. Our induction hardening process offers superior resistance to wear and chipping.



JET-FIT™

The Jet-Fit bar-mount system reduces bar change-out time to seconds. The tail slots make fitting simple. Solid-body Jet-Fit bars offer the same durability and reliability as solid harvester bars with standard mounts.



STUMP SPRAY

Stump Spray helps to control stumproting fungus (Heterobasidion annosum). Oregon developed Stump Spray bars with harvester operators and forest research agencies to better protect conifers.




LubriTec™ OILING SYSTEM

You want tools to work smarter and last longer. We designed LubriTec to deliver the best possible lubrication for your saw chain. Keeping lubrication where it's needed most means a longer lasting saw chain and guide bar and less down time. Here's how it works:


LUBRITEC FOR THE CHAIN

- Lubricant is held inside LubriTec reservoirs.
- Oil flows freely into and around the saw chain parts and the guide bar. Oil is held in the high-friction zone where the saw chain and guide bar groove walls make contact.
- The presence of lubricant lowers friction during the start-up period before the saw's oiling system reaches its peak function.
- LubriTec strengthens the saw chain tie straps and reduces their tendency to flex during operation, making a more stable and durable saw chain.

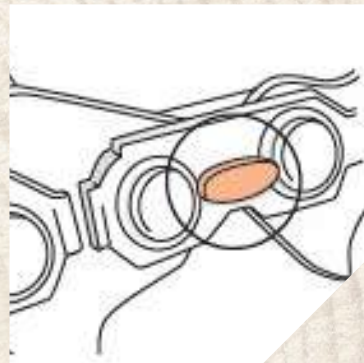

LUBRITEC FOR THE GUIDE BAR

- Our LubriTec guide bar dam is cleverly designed to keep lubricant where it's needed most. It looks like a small barrier and is found in the bottom of the guide bar's groove, just behind the oil hole. It both increases available oil and reduces oil hole plugging. Resulting in better overall lubrication.
- The LubriTec angled oil hole virtually eliminates guide bar oil hole plugging. The oil hole slopes up toward the top of the guide bar and forward toward the nose. It's approximately 40% smaller in diameter than a standard hole, increasing velocity as oil enters the guide bar. It also helps clear sawdust and debris away from the hole during operation.

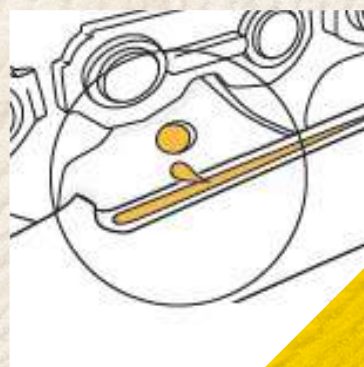

Chain part numbers and family overview



19 HX 086 E

			
CHAIN PITCH AND GAUGE	CHAIN FAMILY	LENGTH number of drivelinks	PACKAGING TYPE
.404"	18 .080" 2,0mm HX Harvester	086 86	
	19 .080" 2,0mm H Harvester	050 50 ft	
3/4"	11 .122" 3,1mm BC Harvester	100 100 ft	
			E Loops R 100 ft Reels

Chain spare parts

							
	18HX	.080" (2,0 mm)	512890	512891	518812	512893	512892
	19HX	.080" (2,0 mm)	597691	597692	597693	597694	597695
	11H	.122" (3,1 mm)	P107541	P107542	P24569	P24577	P107543

19HX CHAMFER CHISEL®

+ Patented saw chain steel provides proven Oregon durability, especially in cold cutting conditions.

+ A tall and aggressive chamfer chisel cutter designed to deliver faster cutting speed.

+ Oregon's largest and thickest .404 components designed to provide superior strength and durability.

+ Blued cutters provide superior corrosion resistance.



18HX



18HX features Micro Chisel Cutters with small-radius working corners for precision performance and easy maintenance. 18HX introduces thicker coined drive links for increased strength, larger rivets for lowered saw chain stretch, and a wider kerf for reduced guide bar bending. 18HX delivers plenty of power and reliable cutting performance with less horsepower output.

 .404"	 7	 18 : 2,0mm	 4,7 mm	 5,5 mm	 35°	 60°	 1,27mm
53 	55 	58 	66 	70 	71 	72 	
18HX053E	18HX055E	18HX058E	18HX066E	18HX070E	18HX071E	18HX072E	
74 	75 	76 	77 	78 	79 	80 	
18HX074E	18HX075E	18HX076E	18HX077E	18HX078E	18HX079E	18HX080E	
81 	82 	85 	86 	87 	88 	89 	
18HX081E	18HX082E	18HX085E	18HX086E	18HX087E	18HX088E	18HX089E	
90 	91 	92 	93 	94 	95 	96 	
18HX090E	18HX091E	18HX092E	18HX093E	18HX094E	18HX095E	18HX096E	
97 	98 	99 	100 	101 	102 	103 	
18HX097E	18HX098E	18HX099E	18HX100E	18HX101E	18HX102E	18HX103E	
104 	105 	108 	109 	1480 			
18HX104E	18HX105E	18HX108E	18HX109E	18HX100R			

19HX



19HX features a new, taller and more aggressive Chamfer Chisel, designed to deliver faster cutting speed and improved chip clearance. 19HX introduces Oregon's thickest and largest components featured on a saw chain, delivering unparalleled cutting speed over the 18HX. 19HX delivers faster, more consistent cuts in all types of wood due to its high-flow, high-power heads and saw motors. Best used with high horsepower output machines.

   80 : 2,0mm	 4,7 mm	 5,5 mm	 35°	 60°	 1,27 mm	
73 	74 	82 	85 	86 	87 	88 
19HX073E	19HX074E	19HX082E	19HX085E	19HX086E	19HX087E	19HX088E
89 	90 	91 	93 	94 	95 	96 
19HX089E	19HX090E	19HX091E	19HX093E	19HX094E	19HX095E	19HX096E
97 	100 	101 	102 	103 	104 	105 
19HX097E	19HX100E	19HX101E	19HX102E	19HX103E	19HX104E	19HX105E
109 	110 	1480 				
19HX109E	19HX110E	19HX100R				

11H



Semi Chisel chains offer superior strength and durability. Featuring 3/4" pitch and a rounded edge on the cutters, the Semi Chisel is perfect for high-performance tasks.

							
45 	46 	52 	55 	60 	75 	383 	
11H045E	11H046E	11H052E	11H055E	11H060E	11H075E	11H050R	

11BC



The Chipper Chisel delivers a reliable stay-sharp performance. The 3/4" pitch and .122" gauge chain are durable, and the large cutters take bigger bites out of the toughest wood.

Technical drawing of the 11BC050R blade showing various dimensions and features:

- Top left: **3/4"** (width)
- Top left: **?** (feature)
- Top left: **122 : 3,1mm** (width)
- Top left: **7,9 mm** (height)
- Top left: **7,9 mm** (height)
- Top left: **30°** (angle)
- Top left: **50°** (angle)
- Top right: **1,52 mm** (height)

Bottom left: **383** (part number)

Bottom left: **11BC050R** (model name)



**DESIGNED &
ENGINEERED
IN THE USA**

OREGON®

HARVESTER GUIDE BARS



Guide bar part numbers and family overview

Oregon bar part numbers are printed on the bar package and etched onto the bar body.



75 2 RH F L149				
				
LENGTH CM	GAUGE INCHES (MM)	BAR TYPE	PITCH	BAR MOUNT
.404"	42	HS Solid harvester	F .404"	B149
	48	HL Stump Spray Left Hand		B163
	54	HR Stump Spray Right Hand		D104
	59	RH Solid Harvester RSN		D149
	60	SM SpeedMax™		D163
	64			L104
	67			L114
	75			L149
	80			L163
	82			L172
	90			M104
	00 (100)			N104
	13 (113)			N114
				P149
				Q104
				Q114
3/4"	36"	SN Solid Harvester RSN	C 3/4"	Q149
	40"			Q163
	45"			R104
	61"			R114
				R149
				S149
				S163

SpeedMax™ XL



Minimize the time between cuts and reduce vibration for your entire cutting system. The SpeedMax XL Replaceable Sprocket Nose (RSN) guide bar features a wider and stronger body with a re-engineered tail contour that is less likely to throw chain.

.404"

54-100cm

2,0mm

LubriTec™
OILING SYSTEM

		54cm	59cm	60cm Jet-Fit™	64cm	64cm Jet-Fit™	67cm Jet-Fit™	75cm
Q	PN	542SMRQ104	592SMRQ104	602SMRQ163	642SMRQ114	642SMRQ163	672SMRQ163	752SMRQ114
		75cm Jet-Fit™	80cm	82cm Jet-Fit™	90cm	90cm Jet-Fit™	100cm	
12-13T	PN	752SMRQ149	802SMRQ114	822SMRQ149	902SMRQ114	902SMRQ149	002SMRQ114	

		64cm	67cm Jet-Fit™	75cm	75cm Jet-Fit™	80cm	82cm Jet-Fit™	90cm Jet-Fit™
R	PN	642SMRR104	672SMRR163	752SMRR114	752SMRR149	802S MRR114	822SMRR149	902SMRR149
14-16T								

		60cm Jet-Fit™	67cm Jet-Fit™	75cm Jet-Fit™	82cm Jet-Fit™	90cm Jet-Fit™
S	PN	602SMRS163	672SMRS163	752SMRS149	822SMRS149	902SMRS149
17-18T						

		75cm Jet-Fit™	82cm Jet-Fit™
P	PN	752SMRP149	822SMRP149
14-16T			

		75cm SpeedMax™ LH Spray
R	PN	752SLRR149
14-15T		



Nose kit for SpeedMax™ XL	SMR14T
Rivets kit for SpeedMax™ XL	578147

Solid Harvester RSN



The Solid Harvester Replacement Sprocket Nose (RSN) guide bar delivers a superior performance for high-speed mechanical harvesting conditions.

.404"

64-82cm

2,0mm

Nose kit for (RSN) .404" 537245

		75cm	75cm Jet-Fit™	82cm Jet-Fit™			75cm Jet-Fit™	82cm Jet-Fit™
L	PN	752RHFL114	752RHFL149	822RHFL149	B	PN	752RHFB149	822RHFB149
		90cm						
11-12T		902RHFL114			13-14T			
		64cm	80cm				75cm Jet-Fit™	82cm Jet-Fit™
N	PN	642RHFN104	802RHFN114		D	PN	752RHFD149	822RHFD149
14-15T					16-18T			

Solid Harvester RSN 3/4"



Oregon® 3/4" Harvester Replacement Sprocket Nose (RSN) guide bars fit a broad range of timber harvesting equipment. Built tough using specialized 3/8" thick alloy-steel with precision-milled grooves. Replacement nose kits are available to maximize bar life.

3/4"

28-61"

3,1mm



Nose kit for (RSN) 3/4" 40603A

		28"	36"	40"	45"	61"
T	PN	281SNCT138	361SNCT138	401SNCT138	451SNCT138	611SNCT138
9-10T						

Solid Harvester



Oregon® Solid Harvester (Sprocket-Nose) guide bars deliver superior performance in demanding, high-speed conditions. This bar resists chipping and features outstanding spring-back. High-grade alloy-steel material and induction-hardened bar rails make it tough and durable.

.404"

42-113cm

2,0mm



Sprocket kit .404" Solid Harvester 101918

		55cm Jet-Fit™	60cm Jet-Fit™	75cm	75cm Jet-Fit™	82cm Jet-Fit™
		PN 552HSFL163	602HSFL163	752HSFL114	752HSFL172	822HSFL149
L						
		88cm	90cm	90cm Jet-Fit™	113cm	
		PN 882HSFL114	902HSFL114	902HSFL149	132HSFL114	
11-12T						

		67cm Jet-Fit™	75cm Jet-Fit™	82cm Jet-Fit™			90cm
		PN 672HSFB163	752HSFB149	822HSFB149			PN 902HSFN114
B					N		
13-14T					14-15T		

		75cm Jet-Fit™	82cm Jet-Fit™			42cm	48cm
		PN 752HSFD149	822HSFD149			PN 422HSFM104	482HSFM104
D				M			
15-18T				9-10T			

Stump Spray



Prevent stump-rotting fungus with the Stump Spray feature on this Solid Harvester guide bar. The bar incorporates all the other patented features of the .404" Solid Harvester guide bar.

.404"

75cm

2,0mm



Left hand


		75cm Jet-Fit™
		PN 752HLFL149
L		
11-12T		

.404"

Jet-Fit™ Tail Mounts


B 149

	13, 14
1	.586" x 3,288" 14,9 x 83,5 mm
2	.413" x .542" 10,5 x 13,8 mm
3	.492" 12,5 mm

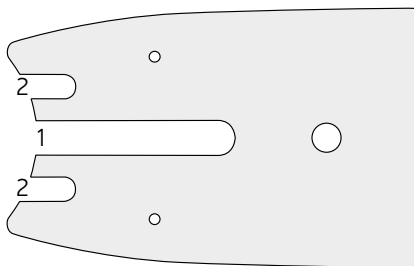


B 163

	13, 14
1	.586" x 3,288" 14,9 x 83,5 mm
2	.413" x .542" 10,5 x 13,8 mm

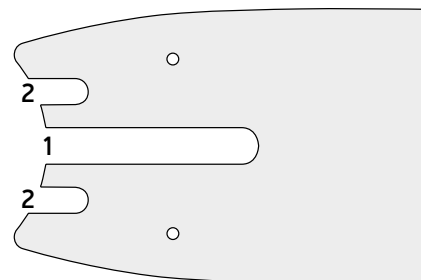


D 149

	16, 17, 18
1	.586" x 3,288" 14,9 x 83,5 mm
2	.413" x .542" 10,5 x 13,8 mm
3	.492" 12,5 mm

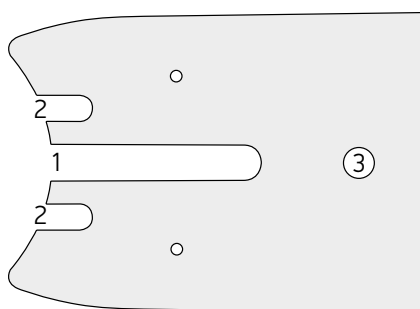


L 149

	11, 12
1	.586" x 3,288" 14,9 x 83,5 mm
2	.413" x .542" 10,5 x 13,8 mm
3	.492" 12,5 mm

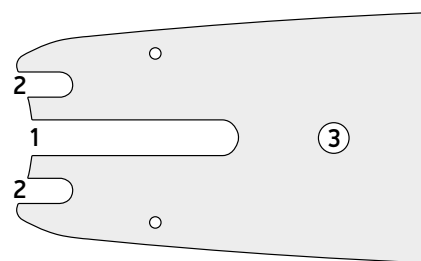


L 163

	11, 12
1	.586" x 3,288" 14,9 x 83,5 mm
2	.413" x .542" 10,5 x 13,8 mm

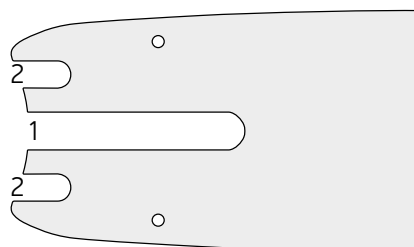


Q/R/P/S 149

	Q: 12, 13 R: 14, 15 P: 15, 16 S: 17, 18
1	.586" x 3,288" 14,9 x 83,5 mm
2	.413" x .542" 10,5 x 13,8 mm
3	.492" 12,5 mm

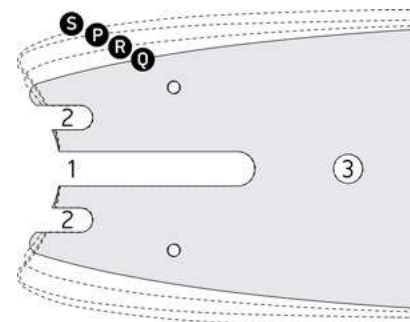

Q/S 163

	Q: 12, 13 S: 17, 18
1	.586" x 3,288" 14,9 x 83,5 mm
2	.413" x .542" 10,5 x 13,8 mm

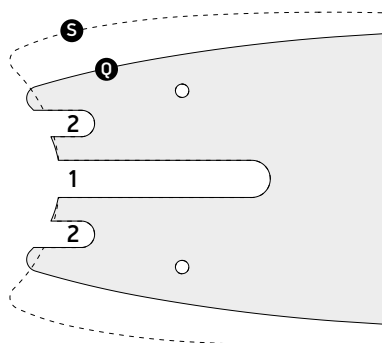


.404"

Standard Tail Mounts


L 104

	11, 12
1	.399" x 3,338" 10 x 84,8 mm
2	.404" x .555" 10,3 x 14,1 mm

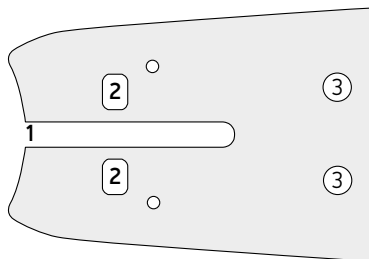


L 114

	11, 12
1	.399" x 3,338" 10 x 84,8 mm
2	.404" x .555" 10,3 x 14,1 mm
3	.435" 11 mm

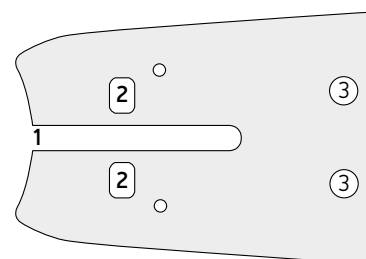


M 104

	9, 10
1	.399" x 3,338" 10 x 84,8 mm
2	.404" x .555" 10,3 x 14,1 mm

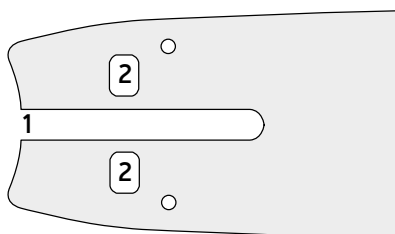


N 104

	14, 15
1	.399" x 3,338" 10 x 84,8 mm
2	.404" x .555" 10,3 x 14,1 mm

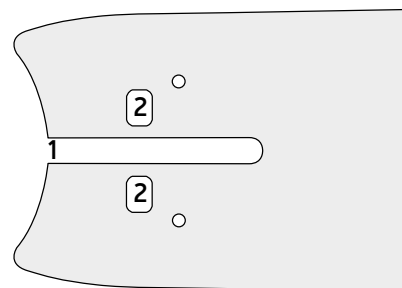


N 114

	14, 15
1	.399" x 3,338" 10 x 84,8 mm
2	.404" x .555" 10,3 x 14,1 mm
3	.435" 11 mm

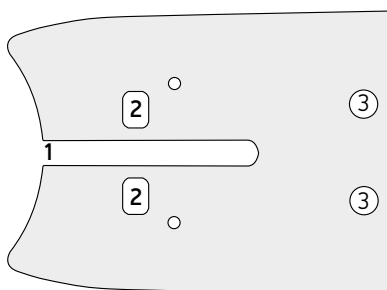**3/4"**

T 138

	9, 10
1	.635" x 7,410" 16,1 x 188,2 mm
2	.650" 16,5 mm

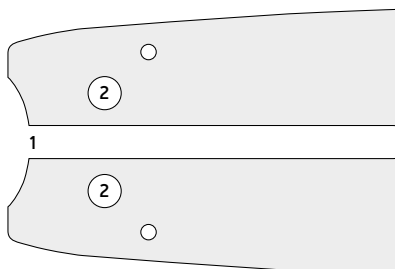



**DESIGNED &
ENGINEERED
IN THE USA**

OREGON®

HARVESTER DRIVE SPROCKETS






DRIVE SPROCKETS

.404"


Our precision-balanced rim sprockets are machined from durable solid-billet steel. They feature a raised-tooth design with a precision match to Oregon .404 chains to reduce chain stretch, and improved debris ejection with tapered side-ports. Patent-pending wear-marks indicate when to replace worn sprockets.



	A	B	C	D
				
				
10				
11		ORB11404XL	ORC11404XL	
12		ORB12404XL	ORC12404XL	
13			ORC13404XL	
14		ORB14404XL	ORC14404XL	ORD14404XL
15			ORC15404XL	
16			ORC16404XL	
17			ORC17404XL	
18			ORC18404XL	

Shims

Type	PN
Shims type C 0,5mm 3-pack	OR-C050-3




It may be necessary to use shims to ensure that the guide bar and harvester drive sprocket are correctly aligned.



A worn drive sprocket causes increased wear on the saw chain and the guide bar. Sprockets should therefore be checked and replaced regularly.


OREGON®

TECHNICAL INFORMATION

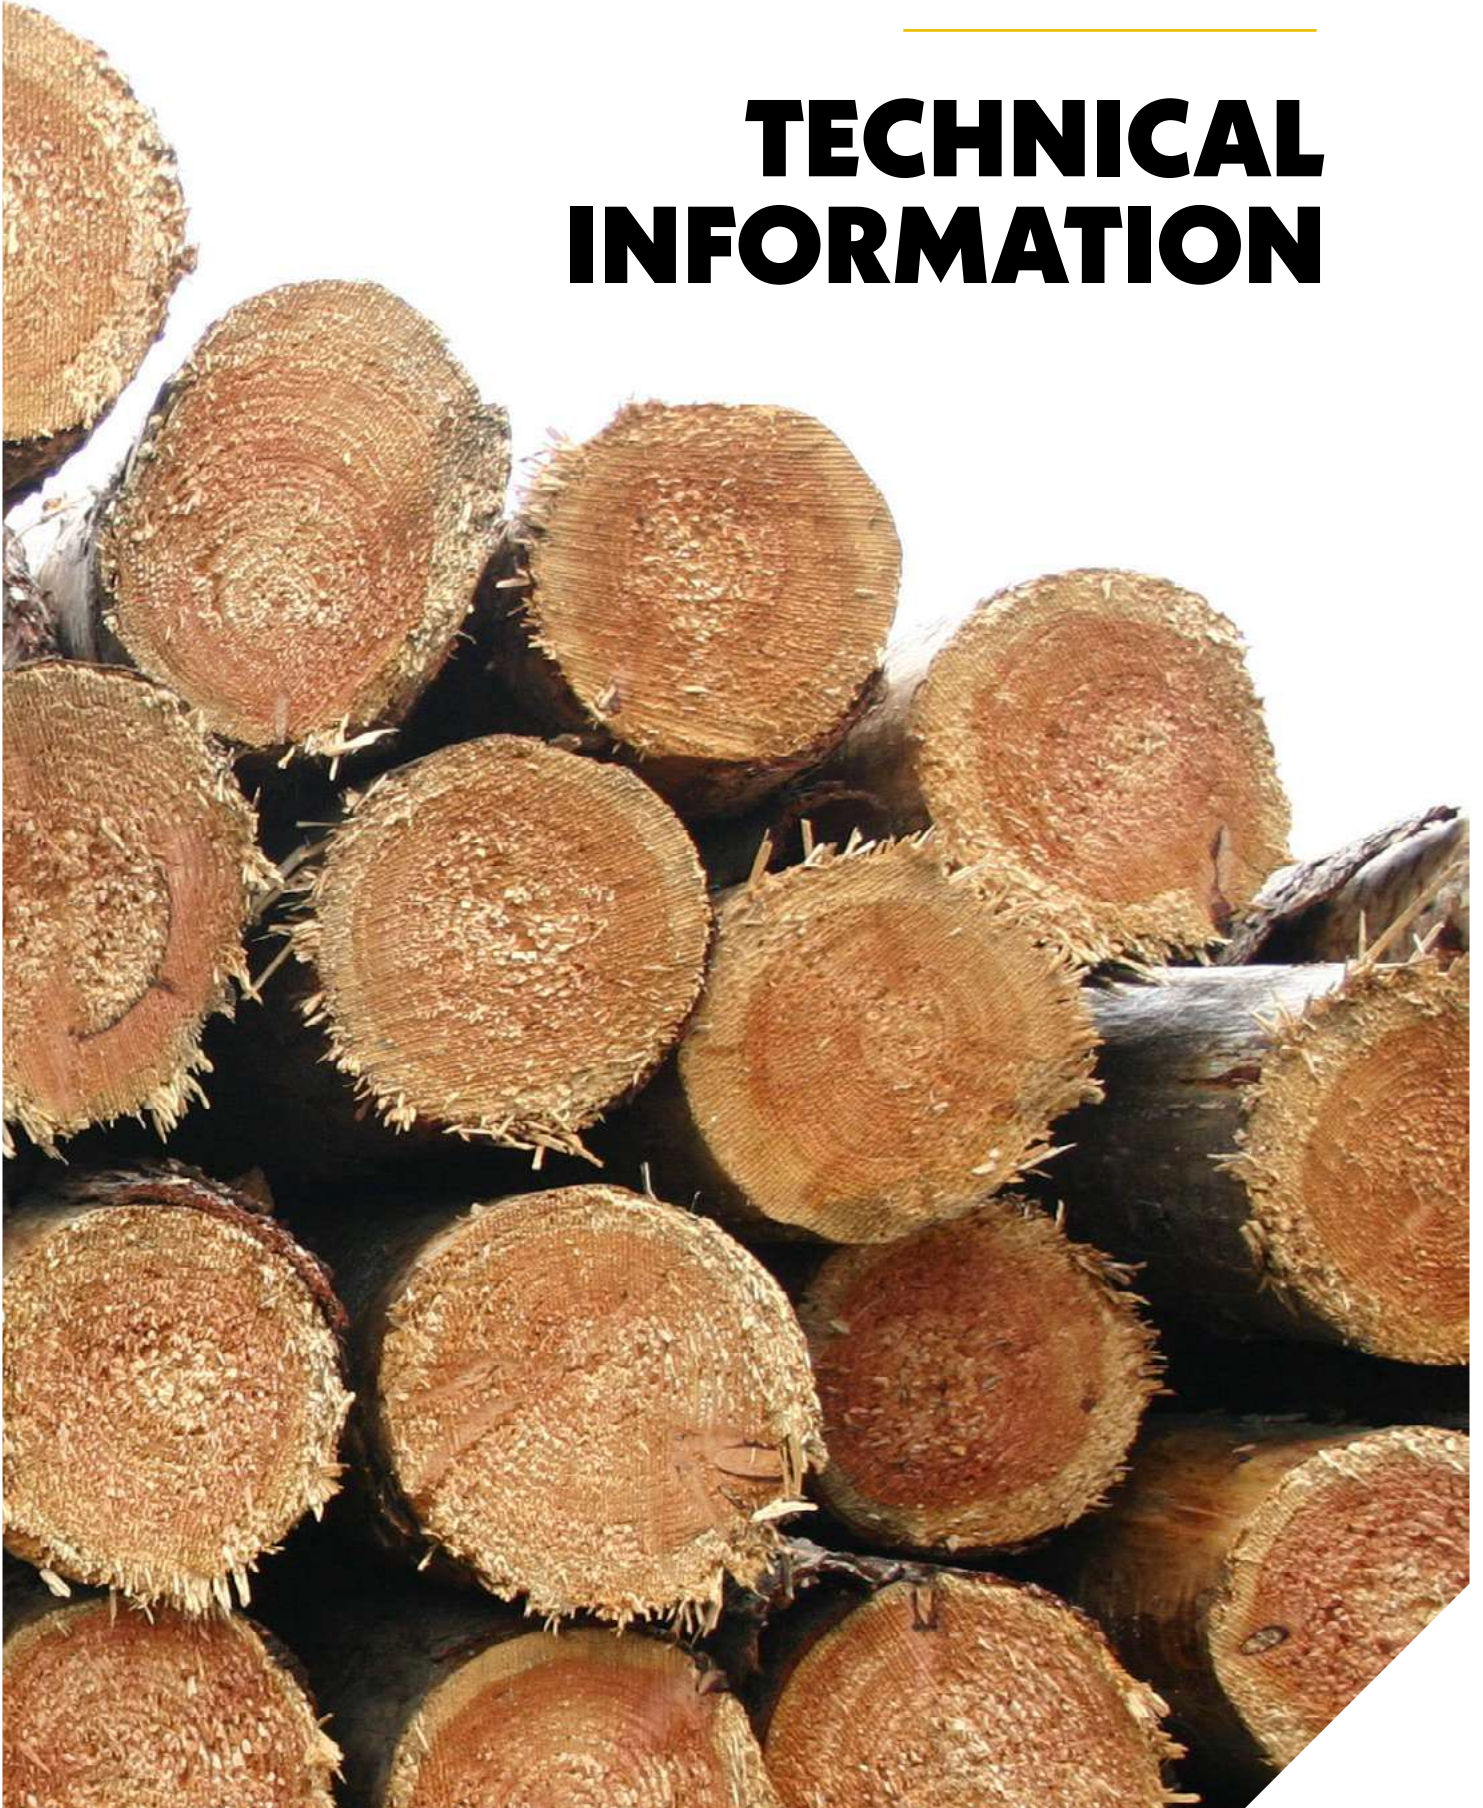

Harvester Multi-Purpose Maintenance Tools

.404" 533689




A. Bar Alignment Tool




B. Bar Groove Cleaner



C. Bar Straightener



D. Bar Groove Depth Gauge



E. Chain Stretch Gauge



F. Grinding Wheel Dress Gauge

Chain Speed, Feed Force, Service Life & Safety: It is well recognized that higher chain speeds and/or feed forces (with attendant power input) generally equate to faster cutting speeds. It is also well recognized that faster chain speeds equate to a shorter service life of the chain, bar, and sprocket. In general, higher chain speeds result in increased wear, shorter service life, and increased occurrence of chain breakage and potential injury.

For more information on safety-related subjects including "how to" details on the maintenance, inspection, and replacement of chains, bars, and sprockets; chain-speed calculations; chain sharpening; and troubleshooting your harvester chain, bar, and sprocket - Oregon® urges operators and dealers to use the Oregon® Harvester Handbook, available from your authorized Oregon® distributor, or by visiting Oregon® directly at www.OregonProducts.com.

Important Safety Information

For maximum protection, machines should be equipped with the appropriate safety attachments (Figure 1). Please follow the recommendations contained in your equipment's operator manuals.


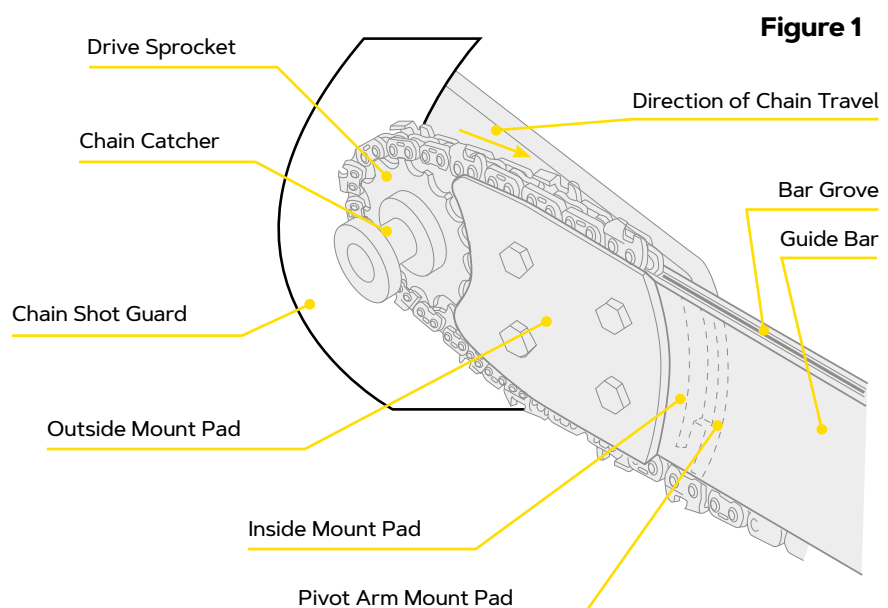


Figure 1

Chain Shot Safety Information

⚠ Chain shot can cause saw chain parts to be thrown in many directions along the cutting plane of the guide bar. The “Shot Cone Zone” reflects where saw chain pieces usually travel in the event of a broken/shot chain (Figure 2).

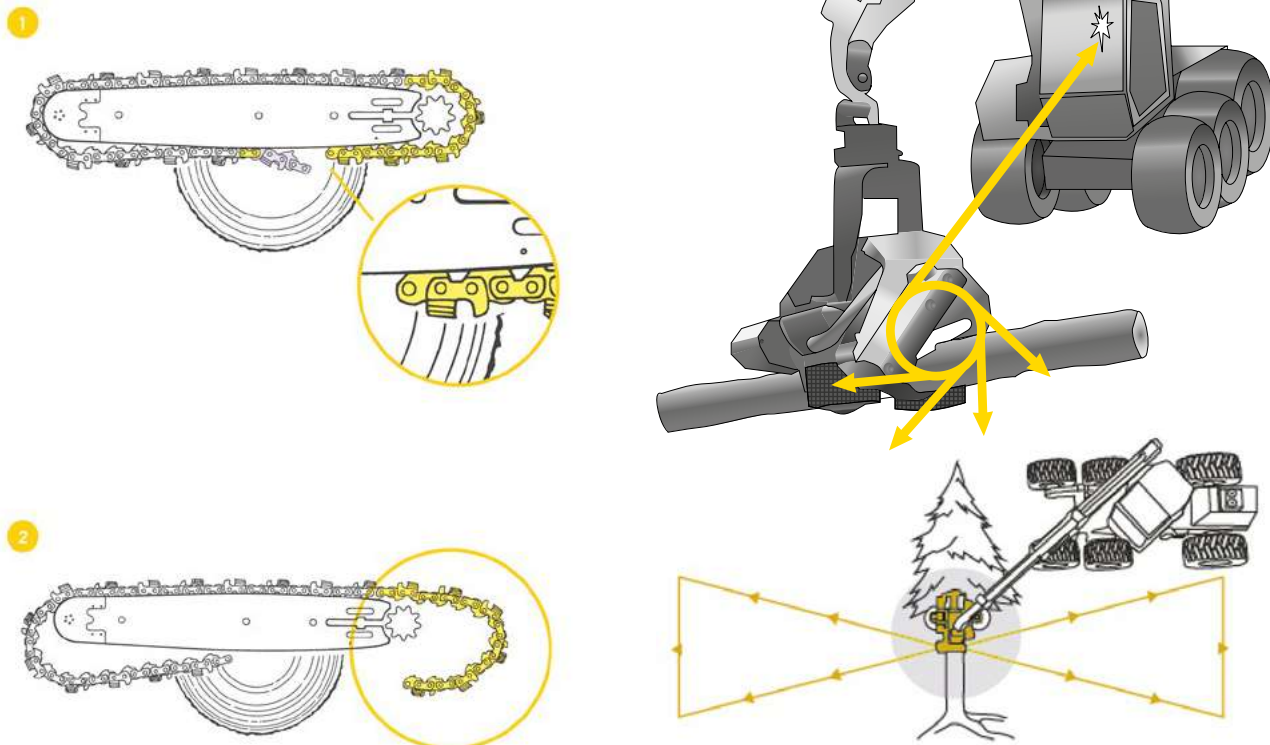

WARNING: There is risk of serious injury or death to the machine operator, ground personnel and bystanders from chain shot. Chain shot occurs when a piece or pieces of cutting chain from the end of a broken saw chain in mechanized timber harvesting or processing is ejected at a high velocity. Chain shot typically originates near the drive end of the cutting system but can also originate from the guide bar tip area. Saw chain pieces usually travel in the cutting plane of the guide bar, but can deviate to either side. Do not use saw chain that:

- Has broken twice.
- Is severely damaged.
- Has excessive saw chain stretch.
- Has broken or cracked components.
- Has loose rivet joints—if you can rotate the rivets with your fingers, they are too loose.

Guards & Shields: Because of the high speeds, high stress, heavy loads, wear factors, and varying levels of repair and maintenance given to saw chain-based mechanized wood harvesters/processors, there is a possibility that saw chain or saw chain pieces can be thrown from the machine at high speed and velocity. Machine operators, ground personnel, and bystanders are exposed to a risk of serious injury or death. Equipment should be equipped with appropriate guards, shields, and window enclosures. Care should be taken to minimize the exposure of the machine operator, ground personnel, and bystanders to the cutting plane of the guide bar. Bystanders and ground personnel should be kept at least 300 feet away.

Chain Shot Guard: A chain shot guard is a piece of material mounted behind the drive sprocket.

This guard performs two functions:

- Absorbs the energy of a broken saw chain coming into contact with the saw box, and is designed to prevent saw chain parts from breaking off and being ejected.
- Acts as an extension of the saw box, designed to reduce the opportunity for thrown saw chain or saw chain parts to escape the saw box (Figure 1).

Operational Recommendations:

- Never engage in a cut with ground personnel or bystanders in the shot cone zone.
- Always engage in a cut as close to the ground as possible.
- Always keep bar and chain pointed away from the cab and operator.



**DESIGNED &
ENGINEERED
IN THE USA**


A yellow and black Oregon harvester is shown in a forest, harvesting a tree. The machine is equipped with a long boom and a grapple. The background shows a dense forest of evergreen trees under a clear blue sky. The foreground is covered in fallen leaves and branches.


OREGON®


HARVESTER APPLICATION GUIDE


									
AFM									
45 Corona	64	.404"	78	ORC13404XL			642RHFN104	642SMRR104	
45 Corona, 45L, 50 Corona, 50L	67	.404"	81	ORC14404XL	●	672HSFB163		672SMRR163	
50, 60, 60 Combi	75	.404"	88	ORC14404XL	●	752HSFB149	752RHFB149	752SMRR149	
60 EUCA	67	.404"	81	ORC14404XL	●	672HSFB163		672SMRR163	
75 FH	82	.404"	95	ORC14404XL	●	822HSFB149	822RHFB149	822SMRR149	
ECO LOG									
HH 45	54	.404"	66	ORC12404XL				542SMRQ104	
HH 55, HH65	64	.404"	75				642RHFN104	642SMRR104	
HH 75	75	.404"	86					752SMRR114	
HH 300	59	.404"	69	ORC12404XL				592SMRQ104	
HH 500	64	.404"	74	ORC12404XL				642SMRQ114	
HH 700	75	.404"	85	ORC12404XL			752RHFL114	752SMRQ114	
HH 701	80	.404"	90	ORC12404XL				802SMRQ104	
Log Max 4000	59	.404"	70	ORC12404XL				592SMRQ104	
Log Max 5000, 6000, 7000	64	.404"	74	ORC12404XL			642RHFN104	642SMRR104	
	75	.404"	85	ORC12404XL				752SMRR114	
	80	.404"	90	ORC12404XL				802SMRQ104	
Huldtins Super Cut	75	.404"	85	ORC12404XL	●	752HSFL149	752RHFL149	752SMRQ149	
	82	.404"	93	ORC12404XL	●		822RHFL149	822SMRQ149	
HULTDINS									
F28, F28S	42	.404"	52	ORC11404XL		422HSFM104			
Super Cut 100	75	.404"	88	ORC14404XL	●	752HSFB149	752RHFB149	752SMRR149	
	82	.404"	95	ORC14404XL	●	822HSFB149			
	90	.404"	102	ORC14404XL	●			902SMRR149	
Super Saw 550	90	.404"	99	ORC14404XL		902HSFL114			
	100	.404"	109	ORC14404XL		002HSFL114			
Super Cut 300	40"	3/4"	60						
Superfell 851 / FL85	40"	3/4"	60				401SNCT138		
	45"	3/4"	67				451SNCT138		
HYPRO									
500, 755	54	.404"	66	ORB12404XL				542SMRQ104	

									
JOHN DEERE									
570, 730, 731, 732, 732B, 735	42	.404"	53	ORB10404XL		422HSFM104			
740, 735/45, 743, 750GP, 870	54	.404"	64	ORB11404XL				542SMRQ104	
742.	59	.404"	70	ORB12404XL				592SMRQ104	
745.	64	.404"	74	ORC11404XL				642SMRQ114	
746, 732 C	59	.404"	69	ORB11404XL				592SMRQ104	
762, 746 B, 746 C	64	.404"	74	ORB12404XL				642SMRQ114	
642, 755, 755 B, 756, 756 B	75	.404"	84	ORB12404XL			752RHFL114	752SMRQ114	
750, 754, 758, 762 B	75	.404"	85	ORC11404XL			752RHFL114	752SMRQ114	
762 C	80	.404"	90	ORC12404XL				802SMRQ104	
670, 260, 706/250, 707/280	75	.404"	85	ORB11404XL			752RHFL114	752SMRQ114	
770, 772, 773 Grip Saw	75	.404"	85	ORC12404XL			752RHFL114	752SMRQ114	
705/270, 705/260, 706/206 S	75	.404"	85	ORB12404XL			752RHFL114	752SMRQ114	
H412	60	.404"	72	ORC12404XL	●	602HSFL163		602SMRQ163	
H414	67	.404"	79	ORC12404XL	●			672SMRQ163	
	75	.404"	87	ORC13404XL	●	752HSFB149	752RHFB149	752SMRR149	
H415	82	.404"	96	ORC13404XL	●	822HSFB149	822RHFB149	822SMRR149	
	90	.404"	101	ORC13404XL	●			902SMRR149	
H 480 Super Cut	75	.404"	86	ORB12404XL	●	752HSFL149	752RHFL149	752SMRQ149	752HLFL149
	82	.404"	93	ORB12404XL	●		822RHFL149	822SMRQ149	
732C Super Cut	55	.404"	67	ORB11404XL	●	552HSFL163			
742 Super Cut	60	.404"	70	ORB11404XL	●	602HSFL163		602SMRQ163	
742 Super Cut, 754 Super Cut	67	.404"	78	ORB11404XL	●			672SMRQ163	
745 Super Cut	75	.404"	85	ORC11404XL	●	752HSFL149	752RHFL149	752SMRQ149	752HLFL149
752 Super Cut	75	.404"	86	ORC12404XL	●	752HSFL149	752RHFL149	752SMRQ149	752HLFL149
H 752 Super Cut	60	.404"	70	ORC11404XL	●	602HSFL163		602SMRQ163	
	67	.404"	78	ORC11404XL	●			672SMRQ163	
	75	.404"	86	ORB12404XL	●	752HSFL149	752RHFL149	752SMRQ149	752HLFL149
758 Super Cut, 758 HD Super Cut, 762 Super cut	75	.404"	86	ORC12404XL	●	752HSFL149	752RHFL149	752SMRQ149	752HLFL149
	82	.404"	93	ORC12404XL	●		822RHFL149	822SMRQ149	
Fiber Pack	40"	3/4"	58				401SNCT138		

	 cm/ inch				 Jet-Fit™	 Solid Harvester	 Solid Harvester RSN	 SpeedMax™	 Stump Spray
KESLA / PATU, FORESTRI									
Patu 30	38"	3/8"	56			158RNDD009			
Patu fall grip	43"	3/4"	64						
Patu / 400 RH / 405 RH	54	.404"	65	ORC13404XL				542SMRQ104	
Patu. LF40 / 355 RH	48	.404"	58	ORC10404XL		482HSFM104			
405 RH / 410 SH	54	.404"	64	ORC12404XL				542SMRQ104	
Foresteri 20 RH, 22 RH, 25 RH, 30 RH	64	.404"	76	ORC14404XL			642RHFN104	642SMRR104	
	75	.404"	87	ORC14404XL				752SMRR114	
505 RH, 506 SH	75	.404"	87	ORC14404XL				752SMRR114	
L-F Delimber	54	.404"	65	ORC12404XL				542SMRQ104	
KETO									
50. Forst	42	.404"	53	ORB10404XL		422HSFM104			
51, 51LD, 51Viktor, 100	54	.404"	64	ORB11404XL				542SMRQ104	
100, 150	64	.404"	74	ORC14404XL			642RHFN104	642SMRR104	
150, 500L/LS, 525, 525 TS	75	.404"	85	ORC11404XL			752RHFL114	752SMRQ114	
500 HD	80	.404"	90	ORC11404XL				802SMRQ104	
525 Top Saw	42	.404"	52			422HSFM104			
750, 1000 Top Saw	48	.404"	58			482HSFM104			
1000, 750, 750 TS	40"	3/4"	60				401SNCT138		
800 Seprim	40"	3/4"	60				401SNCT138		
KOMATSU									
901, 935, 701/GM 626, 711/GM626	42	.404"	53			422HSFM104			
935, 942, 945, 948, 330	54	.404"	64					542SMRQ104	
	64	.404"	74					642SMRQ114	
945, 955, 960	64	.404"	74					642SMRQ114	
960, 965, 900T, 902H, 993, 994, 985 S2	64	.404"	76				642RHFN104	642SMRR104	
	75	.404"	87					752SMRR114	
990, 990S-2	64	.404"	74					642SMRQ114	
985TVIGG, 940, 955, After # 220	64	.404"	74					642SMRQ114	
960 Tensioner	64	.404"	76				642RHFN104	642SMRR104	
330.1	54	.404"	64	ORB11404XL				542SMRQ104	

    		Jet-Fit™	Solid Harvester	Solid Harvester RSN	SpeedMax™	Stump Spray
KOMATSU (suite)						
330.2, 330.2DUO, 340	54	.404"	66	ORC12404XL		542SMRQ104
	59	.404"	70	ORC12404XL		592SMRQ104
	64	.404"	74	ORC12404XL		642SMRQ114
370.2	82	.404"	96	ORC14404XL	●	752HSFB149 752RHFB149 752SMRR149
360, 360.2, 370, 370E	75	.404"	89	ORD14404XL	●	752HSFB149 752RHFB149 752SMRR149
	82	.404"	96		●	822HSFB149 822SMRR149
	90	.404"	104		●	902SMRR149
350, 365, C144	67	.404"	82	ORC14404XL	●	672HSFB163
	75	.404"	89	ORC14404XL	●	752HSFB149 752RHFB149 752SMRR149
	82	.404"	96	ORC14404XL	●	822HSFB149 822RHFB149 822SMRR149
Top Saw 370	54	.404"	65			
Top Saw 385, 385 Maxi, 395	54	.404"	65	ORB11404XL		
380	75	.404"	87		●	752HSFB149 752RHFB149 752SMRR149
385	34"	3/4"	54			
385 Maxi	90	.404"	103	ORD14404XL	●	902SMRR149
S82	67	.404"	82		●	672HSFB163 672SMRR163
395	38"	3/4"	60			
LOGMAX						
728, 425, 626, 828	42	.404"	53	ORB10404XL		422HSFM104
828ESB, 928	48	.404"	58	ORB10404XL		482HSFM104
3000 10cc	59	.404"	69	ORC11404XL		592SMRQ104
3000 19cc/F2	59	.404"	70	ORC12404XL		592SMRQ104
5000.	64	.404"	74	ORC12404XL		642SMRQ114
4000 10cc	59	.404"	69	ORC11404XL		592SMRQ104
4000 19cc/F2	59	.404"	70	ORC12404XL		592SMRQ104
5000 ESB, 7000	75	.404"	85	ORC12404XL		752RHFL114 752SMRQ114
5000 ESB HD 98XL	75	.404"	86	ORC12404XL	●	752HSFL149 752RHFL149 752SMRQ149
7000, 9000	80	.404"	90	ORC12404XL		802SMRQ104
7000 98 XL	75	.404"	86	ORC12404XL	●	752HSFL149 752RHFL149 752SMRQ149
7000 98 XL, 9000 98 XL	82	.404"	93	ORC12404XL	●	822RHFL149 822SMRQ149
9000 98 XL	90	.404"	101	ORC12404XL	●	902SMRQ149

									
5000 Top Saw	48	.404"	60	ORC11404XL		482HSFM104			
7000, 9000 Top Saw	59	.404"	70	ORC12404XL				592SMRQ104	
Log Max 1200	90	.404"	106	ORC15404XL					
	40"	3/4"	60	9T					
	42"	3/4"	67	9T					
Top saw	75	.404"	85	ORC12404XL					
Log Max 9000	90	.404"	101						
5-55	64	.404"	75	ORB11404XL				642SMRQ114	
6-55	64	.404"	75	ORC11404XL				642SMRQ114	
5-55L	75	.404"	86	ORB11404XL			752RHFL114	752SMRQ114	
6-65	75	.404"	86	ORC11404XL			752RHFL114	752SMRQ114	
4M	54	.404"	64	ORC11404XL				542SMRQ104	
5M	59	.404"	69	ORC11404XL				592SMRQ104	
6M	64	.404"	75	ORC11404XL				642SMRQ114	
7L	64	.404"	75	ORC11404XL				642SMRQ114	
7L	75	.404"	86	ORC11404XL			752RHFL114	752SMRQ114	
8L	75	.404"	86	ORC11404XL	●	752HSFL149	752RHFL149	752SMRQ149	
8L	82	.404"	93	ORC11404XL	●		822RHFL149	822SMRQ149	
PONSSE									
H 40, H 50	54	.404"	65					542SMRQ104	
H 50	59	.404"	70	ORB11404XL				592SMRQ104	
H 53, H 60, H 73	64	.404"	76	ORC13404XL			642RHFN104	642SMRR104	
	75	.404"	87	ORC13404XL				752SMRR114	
H60, H73 Whit 16 to 17 Rims	75	.404"	88	ORC16404XL					
	80	.404"	94	ORC16404XL					
30cc whit 16 to 17 Rims	75	.404"	90	ORC16404XL	●	752HSFD149	752RHFD149	752SMRS149	
H73 / 30cc whit 16 to 17 Rims	82	.404"	97	ORC16404XL	●	822HSFD149	822RHFD149	822SMRS149	
H73 / 19cc whit 13 Rims	82	.404"	95	ORC13404XL	●	822HSFB149	822RHFB149	822SMRR149	
H7, H8, New Heds	75	.404"	88	ORC16404XL	●	752HSFD149	752RHFD149	752SMRS149	
	82	.404"	97	ORC16404XL	●	822HSFD149	822RHFD149	822SMRS149	

									
ROTTNE									
2000/ 828 PAN	42	.404"	53	ORC11404XL		422HSFM104			
2000/ 828 ESB	48	.404"	58	ORC11404XL		482HSFM104			
770, 780 Snoken, EGS 88	54	.404"	65	ORC11404XL				542SMRQ104	
EGS 400, EGS 405,	59	.404"	71	ORC11404XL				592SMRQ104	
EGS 85	64	.404"	74	ORC11404XL				642SMRQ114	
810/860, RF 81, 600	75	.404"	85	ORC11404XL			752RHFL114	752SMRQ114	
602 B	80	.404"	91	ORC14404XL			802HRFN114	802SMRR114	
EGS 402	58.5	.404"	71	ORB11404XL				592SMRQ104	
EGS 550, EGS 602, EGS 604	75	.404"	87	ORC14404XL				752SMRR114	
	80	.404"	92	ORC14404XL			802HRFN114	802SMRR114	
EGS 590, EGS 700, EGS 706	75	.404"	87	ORC12404XL	●	752HSFL149	752RHFL149	752SMRQ149	
	82	.404"	96	ORC12404XL	●		822RHFL149	822SMRQ149	
	90	.404"	101	ORC12404XL	●			902SMRQ149	
SP MASKIN									
SP 730, SP 21, FX 350	42	.404"	53	ORB10404XL		422HSFM104			
SP 735/45, SP 740, FX 450	54	.404"	64	ORB10404XL				542SMRQ104	
FX 550	64	.404"	74	ORB10404XL				642SMRQ114	
SP 551	64	.404"	75	ORC12404XL				642SMRQ114	
FX 650, FX 750	75	.404"	85	ORB12404XL			752RHFL114	752SMRQ114	
SP 451 LF, SP461 LF	54	.404"	66	ORC12404XL				542SMRQ104	
	59	.404"	70	ORC12404XL				592SMRQ104	
	64	.404"	74	ORC12404XL				642SMRQ114	
SP 551 LF, SP 561 LF	60	.404"	72	ORC12404XL	●	602HSFL163		602SMRQ163	
	67	.404"	79	ORC12404XL	●			672SMRQ163	
	75	.404"	86	ORC12404XL	●		752RHFL149	752SMRQ149	
SP 650	64	.404"	74	ORC12404XL				642SMRQ114	
	75	.404"	85	ORC12404XL		752HSFL149	752RHFL114	752SMRQ114	
	80	.404"	90	ORC12404XL		902HSFL114	902RHFL114	902SMRQ114	
SP591LX, SP401EH, SP421EH	27"	.404"	43				271SNCK225		



75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged. Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents. Engineering is the bedrock of our reputation.



PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS.

OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2023 - AD100-005-EN



Discover more of our products at
OregonProducts.com

OREGON®

PERSONAL PROTECTIVE EQUIPMENT

PPE_1.2
EN/EUR







OREGON®

DESIGNED TO PROTECT

Oregon® understands that the needs of woodcutters – professionals and novices – are as diverse as the terrains and environments in which they work.

We have organized our product into families with key characteristics that different users will value. These product families will ensure that you choose the right Safety Equipments for your every day needs. It will make understanding the differences between our product range effortless.

All our products are classified in 3 categories to help you to identify the products that are right for you.

Three product families, differentiated by Packaging color, to simplify your selection process.

GOOD

OCCASIONAL USERS

Occasional Users products are safe, simple to use, lightweight, and provide added value by saving you money.

BETTER

FREQUENT USERS

Landscapers, homeowners, and other frequent users prize simplicity and reliability. Oregon frequent user products were designed for reliable performance.

Oregon frequent user products are safe, simple to use, lightweight, and provide added value by saving you money.

BEST

PROFESSIONAL USERS

Loggers, arborists, orchardists, millwrights, forestry workers, and other highly skilled woodcutters require products designed for the demands of their tough professions. Oregon makes products that are strong, durable, and reliable, and our state-of-the-art innovations promotes a long lifespan.

You demand top performance from your equipment. Oregon "BEST" safety equipment are designed to the highest safety standards and comfort. Durability, Versatility and Security combined.

OREGON®

PERSONAL PROTECTIVE EQUIPMENT

DESIGNED TO PROTECT

Every feature of the Oregon® protective equipment range has been designed with your safety in mind, but is also engineered to ensure comfort, versatility and durability. With Oregon personal protective equipment you can do your job in the safest and most efficient manner.

- **Robust** to stand up against, scratches, chemicals...
- So **light** that you can forget about it
- **Ventilated** for optimum working comfort
- Allowing full **freedom of movement** so you can work without restriction.

HIGH PROTECTION

All Oregon protective equipment grant the same level of protection against chainsaw cuts (according to the Class they are certified to). The differences between models are based on features like weight, comfort, durability and number of pockets.

We offer a wide selection of models with various features to cover your different needs and preferences.

Class corresponds to the chain speed 20, 24, 28 m/s at which the cut test has been done.




Class 1 (20m/s)



Class 2 (24m/s)




Class 3 (28m/s)

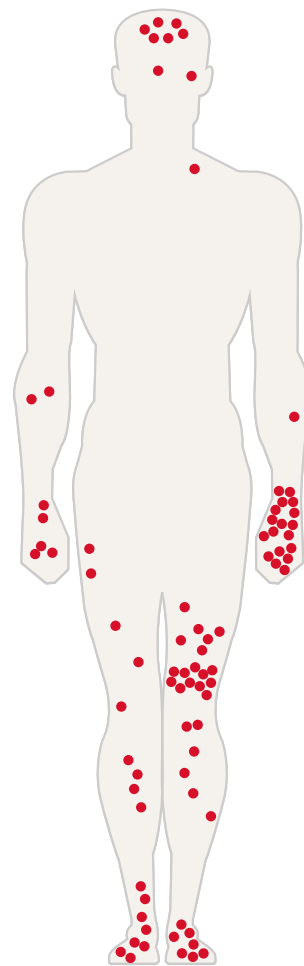

Main areas of chainsaw injuries


TYPE A

Recommended for fully trained chainsaw operators.



TYPE C

Recommended for occasional chainsaw users and those engaged in off the ground tree work such as tree surgeons.



	Chaps	Yukon	Yukon+	Waipoua	Fiordland
Class 1 Protection (20 m/s)	•	•	•	•	•
Additional protection		Type C (front/rear)			
Frequency of chainsaw use	•	••	•••	••••	•••••
Total Weight (size M)	1kg	1.05 kg	1.15kg	1.38kg	1.35kg
Stretch Comfort	•	•	•	•	•
Number of pockets (Only on trousers, bib and brace)		3	3	3	5
Extra double tool pocket				•	•
Hi-vis color		•		•	•
Protective pads in friction areas			•	•	•
Zipper ventilation openings				•	•
Free movement system on shoulders					•
Rubberised zipper pockets					•
Reinforced with Armortex®					•

HOW TO FIND THE RIGHT SIZE

Ensure tape measure is tight against skin

A. CHEST


Measure the circumference around the fullest part of your chest and under the arms.

B. WAIST

Measure the circumference around your natural waist (smallest part of the waist).

C. INSIDE LEG

Measure from the inside leg at the crotch to where the trouser hem is to sit on the shoe.

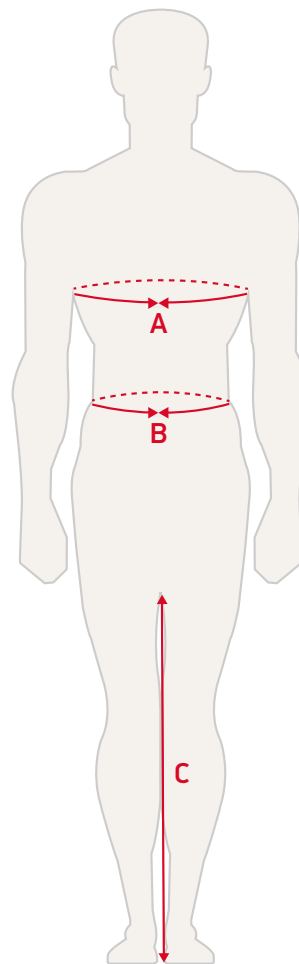

CLOTHING SIZE CHART

Size	Size EU	A Chest	B Waist	C Inseam
S	42 - 44	105 cm	78 - 82 cm	80 cm
M	46 - 48	111 cm	83 - 87 cm	81 cm
L	50 - 52	117 cm	88 - 92 cm	82 cm
XL	54 - 56	123 cm	93 - 97 cm	83 cm
2XL	58 - 60	129 cm	98 - 102 cm	84 cm
3XL	62 - 64	135 cm	103 - 107 cm	84 cm

KWF CERTIFIED

Independent test institute in Germany. Many Oregon PPE products carry the KWF Standard or KWF-Profi label. KWF is an renowned independent entity in Germany that provides advice and support to key players in the Forestry sector. KWF tests and certifies tools and protective equipment and grants the right to print the KWF Standard or FPA logos on products as an indicator of superior quality.



Kuratorium für
Walдарbeit und
Forsttechnik e.V.



NEW

WAIPOUA

DESIGNED TO PROTECT

Taking the forestry user experience one step further, Oregon® introduces the new range of Waipoua protective equipment, with a new, modern design and enhanced features for increased comfort and durability.

BETTER



EN ISO 11393-2:2019



Class 1 (20m/s)

DURABILITY AND COMFORT ALL DAY LONG

- New Hi-Vis design in two colours
- Breathable: zipper ventilation at back
- Comfortable: 4-way stretch
- Lightweight: 1.38 kg (size M trousers)
- Practical: zipper pockets at front and double tool pocket at back.
- Durable: tear and scratch resistant polyester, protective nylon pads on friction areas.

CUT, ABRASION, HEAT, OIL AND FUEL RESISTANT.



295469

295466





LEATHER CHAINSAW PROTECTIVE BOOTS



The right pair of footwear can be your best ally when working in challenging conditions. Oregon chainsaw protective boots feature a sturdy construction for protection and durability, while ensuring the level of comfort only a leather boot can provide.

- Carefully selected, high-resistant materials (leather, insole and outsole, seams, eyelets and hooks, laces)
- Designed to optimize comfort and limit weight
- Cold and heat isolation for extreme working conditions
- Class 1 and 2 chainsaw protection
- Anti-slip sole to ensure stability
- Water repellent and waterproof properties
- Anti-perforation outsole (Fiordland)

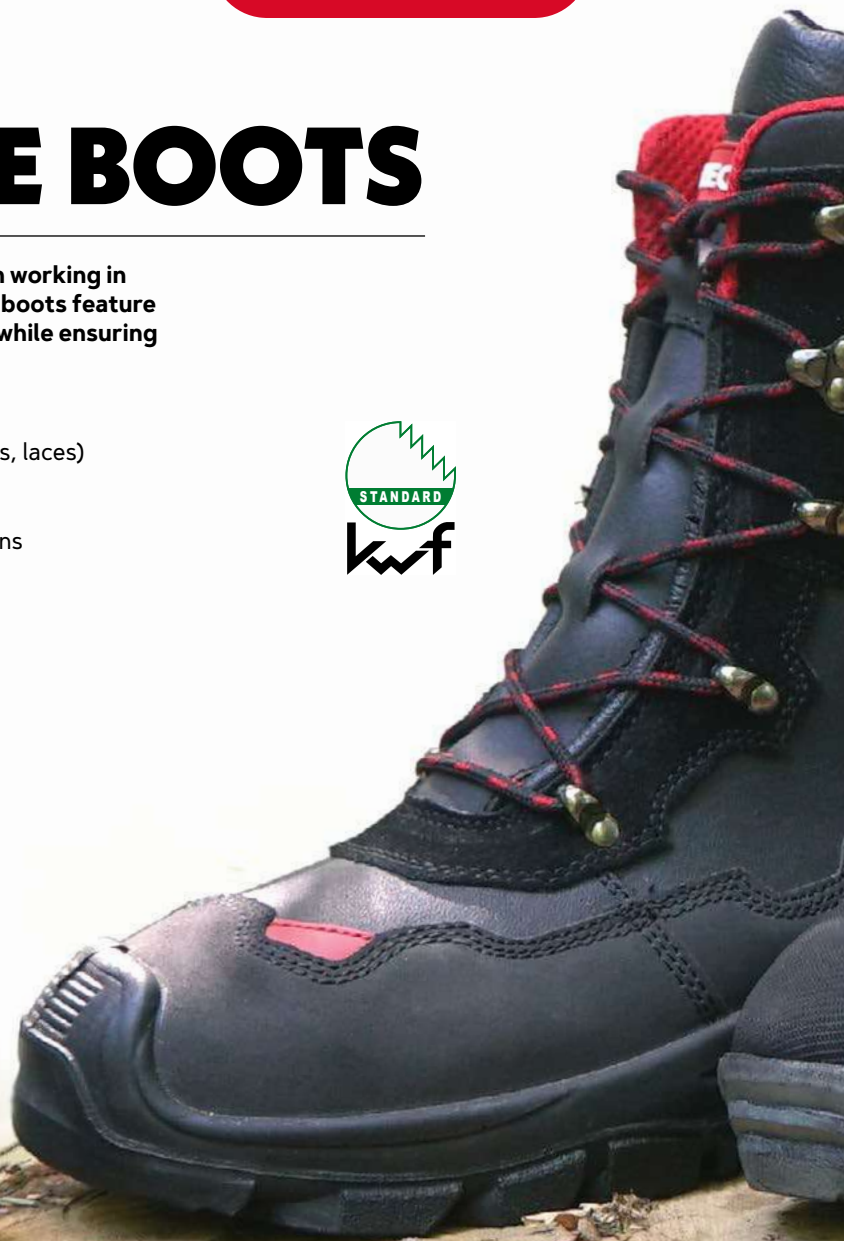

	Model	OREGON	Protection level	Available sizes EUR UK	Weight (size 43) (size 9)	Chainsaw size	Frequency of chainsaw use	Diameter of wood to cut	Durability
GOOD	YUKON	295449/ (SIZE)	EN ISO 17249-2013 Class 1 (20m/s)	39 to 48 5.5 to 13	2,3 kg	38-62 cc or Electric, battery	● ●	Ø 0-60 cm	● ● ●
BETTER	WAIPOUA	295479/ (SIZE)	EN ISO 17249-2013 Class 1 (20m/s)	38 to 48 5 to 13	2 Kg	38-100 cc	● ● ● ●	Ø 0-90 cm	● ● ● ●
BEST	FIORDLAND	295469/ (SIZE)	EN ISO 20345-2011 SE2 A E WRU FO SRC Class 2 (24m/s)	38 to 48 5 to 13	2,2 Kg	38-100 cc	● ● ● ●	Ø 0-90 cm	● ● ● ● ●

YUKON®

GOOD

EN ISO 11393-2:2019



Class 1 (20m/s)

WAIPOUA®

BETTER

EN ISO 11393-2:2019



Class 1 (20m/s)

FIORDLAND®

BEST

EN ISO 11393-2:2019



Class 2 (24m/s)



Material	Cold & heat isolation	Heat resistant (300°C)	Waterproof membrane (WR)	Water resistant upper (WRU)	Protective material (100% polyester)	Metal toe cap (SB)	Anti-perforation outsole (P)	Anti-slip outsole (SRC)
Cow leather & PU outsole				✓	✓	✓		✓
Cow leather & nitril outsole	✓	✓		✓	✓	✓		✓
Nubuck leather & nitril outsole	✓	✓	✓	✓	✓	✓	✓	✓

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	25 26	
--------------	--------	-----------	----------------	-------	--



PROTECTIVE TROUSERS

YUKON Type A Protective Trousers GOOD	295435/	Type A EN ISO 11393-2:2019 Class 1 (20m/s)	• 5-layer protective material • Abrasion resistant 4-way stretch polyester • 2 large front pockets and one back pocket • Lightweight: 1,05 kg (size M trousers)	 EN ISO 11393-2:2019  Class 1 (20m/s)	S ► 3XL 10	
	S					
	M					
	L					
	XL					
YUKON Type C Protective Trousers GOOD	295397/	Type C EN ISO 11393-2:2019 Class 1 (20m/s)	• 5-layer protective material • Abrasion resistant 4-way stretch polyester • 2 large front pockets and one back pocket	 EN ISO 11393-2:2019  Class 1 (20m/s)	S ► 3XL 10	
	S					
	M					
	L					
	XL					
YUKON Protective Bib and brace GOOD	295445/	EN ISO 11393-2:2019 Class 1 (20m/s)	• 5-layer protective material • Abrasion resistant 4-way stretch polyester • 2 large front pockets and one back pocket • Lightweight: 1,05 kg (size M trousers)	 EN ISO 11393-2:2019  Class 1 (20m/s)	S ► 3XL 10	
	S					
	M					
	L					
	XL					
YUKON+ Class 1 Protective Trousers GOOD	295453/	EN ISO 11393-2:2019 Class 1 (20m/s)	• 6 cutting resistant protective layers • 35% cotton for comfort, breathability and sweat control • 65% polyester for high durability • Oil, fuel and heat resistant • Lightweight: 1.15 kg (size M Class 1)	 EN ISO 11393-2:2019  Class 1 (20m/s)	S ► 3XL 8	
	S					
	M					
	L					
	XL					

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	25 26	
--------------	--------	-----------	----------------	-------	--



295466/
S
M
L
XL
2XL
3XL

NEW
WAIPOUA®
Protective
Trousers
BETTER

EN ISO
11393-2:2019
Class 1
(20m/s)

• Black / Red

- 6 Layer protective material
- Abrasion resistant 4-way stretch polyester
- Lightweight: 1,38kg (size M)
- Zipper pockets at front and double tool pocket at back
- Zipper ventilations at back of legs



EN ISO 11393-2:2019



Class 1 (20m/s)

S ► 3XL

8



295469/
S
M
L
XL
2XL
3XL

FIORDLAND
Protective
Trousers
BEST

EN ISO
11393-2:2019
Class 1
(20m/s)

• Red / Black / Hi-Vis Yellow

- 6 Layer protective material
- Long lasting, durable nylon with twill fabric on the front
- Armortex® patches in rubbing, wearing and snatching areas
- 5 rubberized zipper pockets
- Extra long zipper ventilation on both legs
- Oil, fuel and heat resistant
- Lightweight
- Repair kit provided



EN ISO 11393-2:2019



Class 1 (20m/s)

S ► 3XL

8



PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	25 26	
--------------	--------	-----------	----------------	-------	---



NON PROTECTIVE JACKET

YUKON
Non Protective
Jacket

GOOD

295472/

S

M

L

XL

2XL

3XL

- Abrasion resistant 4-way stretch polyester
- 4 pockets (1 chest + 2 sides + 1 First Aid pockets)
- Comfortable high collar with Corduroy
- Reinforced with Cordura® elbow patches



S ► 3XL

18



NEW

High-Vis
Jacket

GOOD

295478-

S

M

L

XL

2XL

3XL

EN ISO
20471:2013
+ A1:2016
Class 3

- Class 3 certified jacket, high day and night visibility
- Fluorescent color and reflective stripes
- Back and underarm ventilation
- 2 chest pockets + 2 waist pockets + 1 first aid pocket
- Adjustable cuffs with buttons
- Extended back



S ► 3XL

10



UNIVERSAL LEGGINGS

Leggings

GOOD

575780

EN ISO
11393-2:2019
Class 1
(20m/s)

- One size fits all
- 6-layer protective material
- Abrasion resistant 4-way stretch polyester
- 4 adjustable straps on each back leg
- Lightweight: 1kg



EN ISO 11393-2:2019



Class 1 (20m/s)

10



PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	25 26	
--------------	--------	-----------	----------------	-------	--



CHAINSAW PROTECTIVE CUFFS

Cuffs

GOOD

572332

EN ISO
11393-6:
2019
clause 4.7

- Class 1 (20 m/s) arm protection for forestry and arborist work
- One size fits all
- Outer fabric: 100% polyester
- Lining: 67% polyester + 33% cotton



Class 1 (20m/s)



LOGGER BRACES

Braces with
metal clips

562411

- Fits all oregon trousers

10



Braces for
buttons

537804



SHINGUARDS

Brushcutter
shinguards

559061

- Protects entire lower leg and knee
- Soft, cushioned inside molds
- Strong adjustable buckle system

25



PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	25 26	
--------------	--------	-----------	----------------	-------	--



CHAINSaw PROTECTIVE RUBBER BOOTS

295385/

38
39
40
41
42
43
44
45
46
47
48

Yukon
rubber boots

- Hight chainsaw protection - Class 3
- Natural rubber with comfortable cotton lining
- Steel toe cap (200J)
- Shock absorbent heel
- Oil and slip resistant rubber sole (SRA certified)

EN ISO 17249:
2013 Class 3
(28 m/s)

EN ISO 20345:
2011 - SB E SRA

38 ▶ 5
39 ▶ 5½
40 ▶ 6½
41 ▶ 7½
42 ▶ 8
43 ▶ 9
44 ▶ 9½
45 ▶ 10½
46 ▶ 11
47 ▶ 12
48 ▶ 13

5



Class 3 (28m/s)



PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	25 26	
				EUR ► UK	



CHAINSAW PROTECTIVE LEATHER BOOTS

YUKON leather boots	GOOD	295449/		• Water-repellent upper • Cow leather & PU outsole • Lightweight: 2.3 kg • Anti-slip and hydrocarbon resistant outsole • Premium quality lace hooks	39 ► 5½ 40 ► 6½ 41 ► 7 42 ► 8 43 ► 9 44 ► 9½ 45 ► 10½ 46 ► 11 47 ► 12 48 ► 12½
		39	EN ISO		
		40	17249:		
		41	2013		
		42	Class 1		
		43	(20m/s)		
		44	EN ISO		
		45	20345:		
		46	2011 -		
		47	S2 A E WRU		
		48	FO SRC		
				 	
				 	



WAIPOUA® leather boots	BETTER	295479/		• Water-repellent upper • 1,8mm cow leather & nitril outsole • Lightweight: 2 kg (size 43) • Cold and heat isolation, heat resistant • Anti-slip and hydrocarbon resistant outsole • Ergonomic with collar padding	38 ► 5 39 ► 5½ 40 ► 6½ 41 ► 7½ 42 ► 8 43 ► 9 44 ► 9½ 45 ► 10½ 46 ► 11 47 ► 12 48 ► 13
		38	EN ISO		
		39	17249:2013		
		40	Class 1		
		41	(20m/s)		
		42	EN ISO 20345:		
		43	2011 - S2 HRO		
		44	HI CI SRC		
		45			
		46			
		47			
		48			
				 	
				 	



FIORDLAND leather boots	BEST	295469/		• Waterproof, isolated against cold and resistant to heat up to 300°C • 2mm nubuck leather & nitril outsole • Lightweight: 2.2 kg • Anti-perforation, anti-slip and hydrocarbon resistant outsole • Ergonomic with collar padding	38 ► 5 39 ► 5½ 40 ► 6½ 41 ► 7½ 42 ► 8 43 ► 9 44 ► 9½ 45 ► 10½ 46 ► 11 47 ► 12 48 ► 13
		38	EN ISO		
		39	17249:2013		
		40	Class 2 (24m/s)		
		41	EN ISO		
		42	20345:2011		
		43	- S3 WR SRC		
		44	FO HI CI HRO		
		45			
		46			
		47			
		48			
				  	
				 	



PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	
--------------	--------	-----------	----------------	--



YUKON FORESTRY HELMET COMBINATION

Yukon
Safety helmet
combination

GOOD

562412

EN 397:
2012
+ A1:2012
EN 352-3:
2002
EN 1731:
2006

- Impact resistant PP helmet
- 6 ventilation holes for breathability
- 6 points easy to adjust
- harness with ratchet system
- Wide and durable stainless steel mesh visor
- Comfortable earmuffs, SNR value 25.9 dB

12



566092

- Harness replacement

1



523600

- Visor holder

1



566093

- Replacement visor

1



518774

- Hygiene kit

1



562665

- Neck cape

1



PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	
--------------	--------	-----------	----------------	--



WAIPOUA FORESTRY HELMET COMBINATION

Waipoua®
Safety helmet
combination

BETTER

562413

EN 397:
2012
+ A1:2012
EN 352-3:
2002
EN 1731:
2006

- High impact and resistant ABS material
- 20 ventilation holes for breathability
- UV-stabilized shell with rain gutter
- 4 points easy to adjust harness with push-pull ratchet system
- Removable and washable anti-slip sweatband
- Durable stainless steel mesh visor with flip up and dow function
- Comfortable earmuffs, SNR value 26dB
- Removable chin protection included



12



564570

- Suspension kit

1



564580

- Sweatband

1



585673

- Visor holder

1



564579

- Replacement visor

1



564649

- Earmuff replacement

1



605575

- Chin protector

1



562666

- Neck cape

1



PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	
--------------	---------------	-----------	----------------	---



FACE AND EAR PROTECTION

Mesh visor/muff combination	Q515061	EN 352-1:2002 EN 1731:2006 F	• Steel mesh visor • Headband with single-point adjustment • SNR value 27,6 dB	12	
Browguard and steel mesh visor	Q515064	EN 1731:2006 F	• Steel mesh visor • Headband with single-point adjustment	12	
Steel mesh face screen	Q515065	EN 1731:2006 S	• Steel mesh visor • Elastic headband	60	
Polycarbonate visor/muff combination	Q515062	EN 352-1:2002 EN 166:2001 3B	• Polycarbonate visor • Headband with single-point adjustment • SNR value 27,6 dB	12	
Browguard and polycarbonate visor	Q515063	EN 166:2001 3B	• Polycarbonate visor • Headband with single-point adjustment	12	
Polycarbonate face screen	Q515066	EN 166:2001 1S	• Polycarbonate visor • Elastic headband	60	
Polycarbonate face screen	518773	EN 166:2001 1S	• Polycarbonate visor • Replacement part		
Headband with ear muffs	Q515060	EN 352-1:2002	• Sliding ear muff cups • Compact and easy to adjust • SNR value: 24,3dB	32	

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	
--------------	--------	-----------	----------------	--



SAFETY KIT

581188

EN352-1
EN1731
EN388 CAT II

- One mesh visor and earmuff combination (EN352-1 and EN1731 certified)
- One pair of working gloves (size M) EN388 CAT II certified

12



572870

EN352-1
EN 166
EN388 CAT II

- One protective earmuff: 26dB (EN352-1 certified)
- One pair of safety glasses: 100% UV protection, EN 166 certified
- One pair of working gloves (size M) EN388 CAT II certified



36



PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	25 26	
--------------	--------	-----------	----------------	-------	--



WORKING GLOVES

Cold weather working gloves	295487/ M L XL	EN 388:2016, level 2131X EN 511:2006, level X2X	• Hand protection against blade cut, abrasion and puncture • Protection against cold up to -50° • Comfortable and ergonomic • Strong grip on objects and tools	 	
Leather working gloves	539171 M L XL	EN 388:2016, level 3122X	• Leather and 4-way stretch fabric • Protection against blade cut, abrasion and puncture • Excellent operational control • Extra grip • Adjustable strap		
Leather and fabric working gloves	542656	EN 420 CAT I	• Size L (10) • Smooth leather • Close-fit wrist design		

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	25 26	
--------------	--------	-----------	----------------	-------	--



CHAINSAW PROTECTIVE GLOVES

295399 M L XL	EN ISO 11393-4:2019 Class 0 (16 m/s)	• Two hands chainsaw protection • Smooth leather • Excellent chainsaw feel • Durable palm area • Close-fit wrist design	EN388: 2016 3122 X	Design A Class 0 16 m/s EN ISO 11393-4:2019	
	EN 388:2016 Level 3142X	 	M ▶ XL	10	

Leather
gloves

BETTER

91305 S M L XL	EN ISO 11393-4:2019 Class 0 (16 m/s)	• Left hand chainsaw protection • Smooth leather • Excellent chainsaw feel • Durable palm area • Close-fit wrist design	EN388: 2016 3122 X	Design A Class 0 16 m/s EN ISO 11393-4:2019	
	EN 388:2016 Level 3142X	 	S ▶ XL	10	

FIORDLAND
cold weather
gloves

BEST

295485 M L XL	EN ISO 11393-4:2019 Class 0 (16 m/s)	• Left hand chainsaw protection • Durable leather and stretch fabric • Ideal for working in cold weather conditions • Keeps excellent operational control • Reinforcement on palm area and fingers • Adjustable strap for optimum fit around the wrist	EN388: 2016 3122 X	Design A Class 0 16 m/s EN ISO 11393-4:2019	
	EN 388:2016 Level 3122X	 	M ▶ XL	10	

FIORDLAND
leather gloves

BEST

295395 M L XL	EN ISO 11393-4:2019 Class 0 (16 m/s)	• Left hand chainsaw protection • High quality leather and stretch fabric • Keeps excellent operational control • Reinforcement on palm area and fingers • Adjustable strap for optimum fit around the wrist	EN388: 2016 3122 X	Design A Class 0 16 m/s EN ISO 11393-4:2019	
	EN 388:2016 Level 3122X	 	M ▶ XL	10	

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	
--------------	---------------	-----------	----------------	---



SAFETY GLASSES

Clear	Q515068	EN 166:2001 EN 170:2002	• Protection against impacts • UV filter	160	
Yellow	Q515069	EN 166:2001 EN 170:2002	• Protection against impacts • UV filter	160	
Clear	Q525249	EN 166:2001	• Protection against impacts	160	
Yellow	Q525250	EN 166:2001 EN170:2002	• Protection against impacts • UV filter	160	
Black	Q525251	EN 166:2001 EN170:2002 EN172:1994	• Protection against impacts • UV filter • Solar filter for industrial use	160	
Black mirror	Q525252	EN 166:2001 EN170:2002 EN172:1994	• Protection against impacts • UV filter • Solar filter for industrial use	160	
Clear	Q545830	EN 166:2001 EN170:2002	• Protection against impacts • UV filter	160	
Clear silver mirror	Q545831	EN 166:2001 EN170:2002	• Protection against impacts • UV filter	160	

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	
--------------	--------	-----------	----------------	--



Black	Q545832	EN 166:2001 EN170:2002 EN172:1994	• Protection against impacts • UV filter • Solar filter for industrial use	160
Black silver mirror	Q545833	EN 166:2001 EN170:2002 EN172:1994	• Protection against impacts • UV filter • Solar filter for industrial use	160
Clear	572794	EN 166:2001 EN170:2002	• Protection against impacts • UV filter	160
Clear	572796	EN 166:2001 EN170:2002	• Protection against impacts • UV filter	160
Black	572797	EN 166:2001 EN170:2002 EN172:1994	• Protection against impacts • UV filter • Solar filter for industrial use	160



SAFETY GOGGLES

539169	EN 166:2001 EN170:2002	• Protection against impacts • UV filter • PVC frame with top and bottom ventilation holes • Polycarbonate ocular • Non-misting interior • Scratch resistant	30
--------	---------------------------	---	----





75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged. Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents. Engineering is the bedrock of our reputation.



PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS.

OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2024 - AD100-006-EN



Discover more of our products at
OregonProducts.com

OREGON[®]

OUTDOOR POWER EQUIPEMENT

OPE_1.2
EN/EUR







YOUR GARDEN, OUR PASSION

Connecting with customers on a deep level to understand their work and needs, Oregon use specific product optimisation to help professionals and home users to get the job done right.



OUTDOOR POWER EQUIPMENT



OREGON®

INSTANT START

- No Pull Cords
- No Warm-Up Required
- No Petrol-Oil Mixing

LESS DOWN TIME

- Fewer Repairs Needed
(Compared to Petrol Engines)

LOW NOISE

- Significantly Quieter than
Petrol-Powered Motors
- Silent Between Cuts/Trimming
- Start Early and Work Late

COMFORT AND CONTROL

- Ergonomic Design
- Light-Weight and Balanced
- Low Vibration

ZERO EMISSIONS

- Environmentally Friendly
- No Petrol Fumes

 **PowerSharp®**



 **CS1500 Self-Sharpening
Corded Chainsaw**



 **CS1400 Corded
Chainsaw**



 **PS750 Corded
Pole Saw**



 **CS1200 Corded
Chainsaw**

CS1500


THE ONLY SELF-SHARPENING CHAINSAW ON THE MARKET.

With the built-in PowerSharp Sharpening System, there's no more downtime due to a dull chain. Simply pull the lever for 3-5 seconds and the chain works like new. PowerSharp: sharpens on the saw, on the job, in seconds.



PowerSharp®
Sharpening System



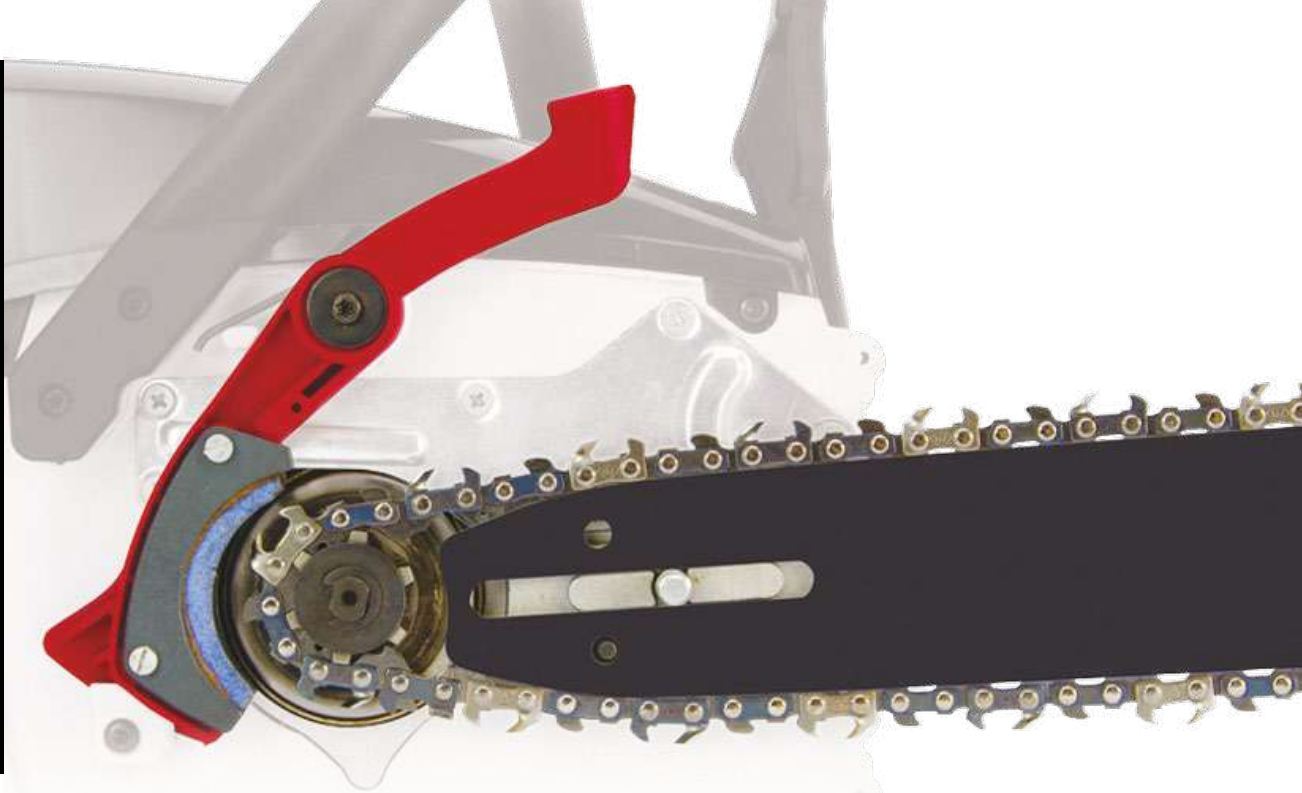

SELF-SHARPENING CORDED CHAINSAW

CS1500

Oregon's high-power, 2400 Watts CS1500 chainsaw is the only corded electric chainsaw on the market with a chain that can sharpen itself. The CS1500 has all the traditional conveniences of an electric chainsaw - instant start with the pull of a trigger, minimal maintenance, low noise and silent between cuts - and takes it one step further by incorporating the built-in PowerSharp® chain sharpening system.



PowerSharp®
Sharpening System

PRODUCT NAME	OREGON	SPECIFICATIONS
--------------	--------	----------------



CS1200 - CORDED CHAINSAW 230V

CS1200

Corded chainsaw
230v



601681

601682
UK only

- Power : 1800 Watts
- Bar Length : 14" (35cm)
- Type of chain : AdvanceCut chain
- Pitch : 3/8" Low-Profile TM
- Gauge : .050" (1.3 mm)
- No Load Chain Speed : 14,5 m/s
- Variable Speed Trigger
- Tool-Less Chain Tensioning System
- Automatic Oiler
- Weight : Only 4.5 kg with guide bar and saw chain attached


Chain

91PX052E
or
Q91VG052E

Guide Bar 14"

140SDEA041



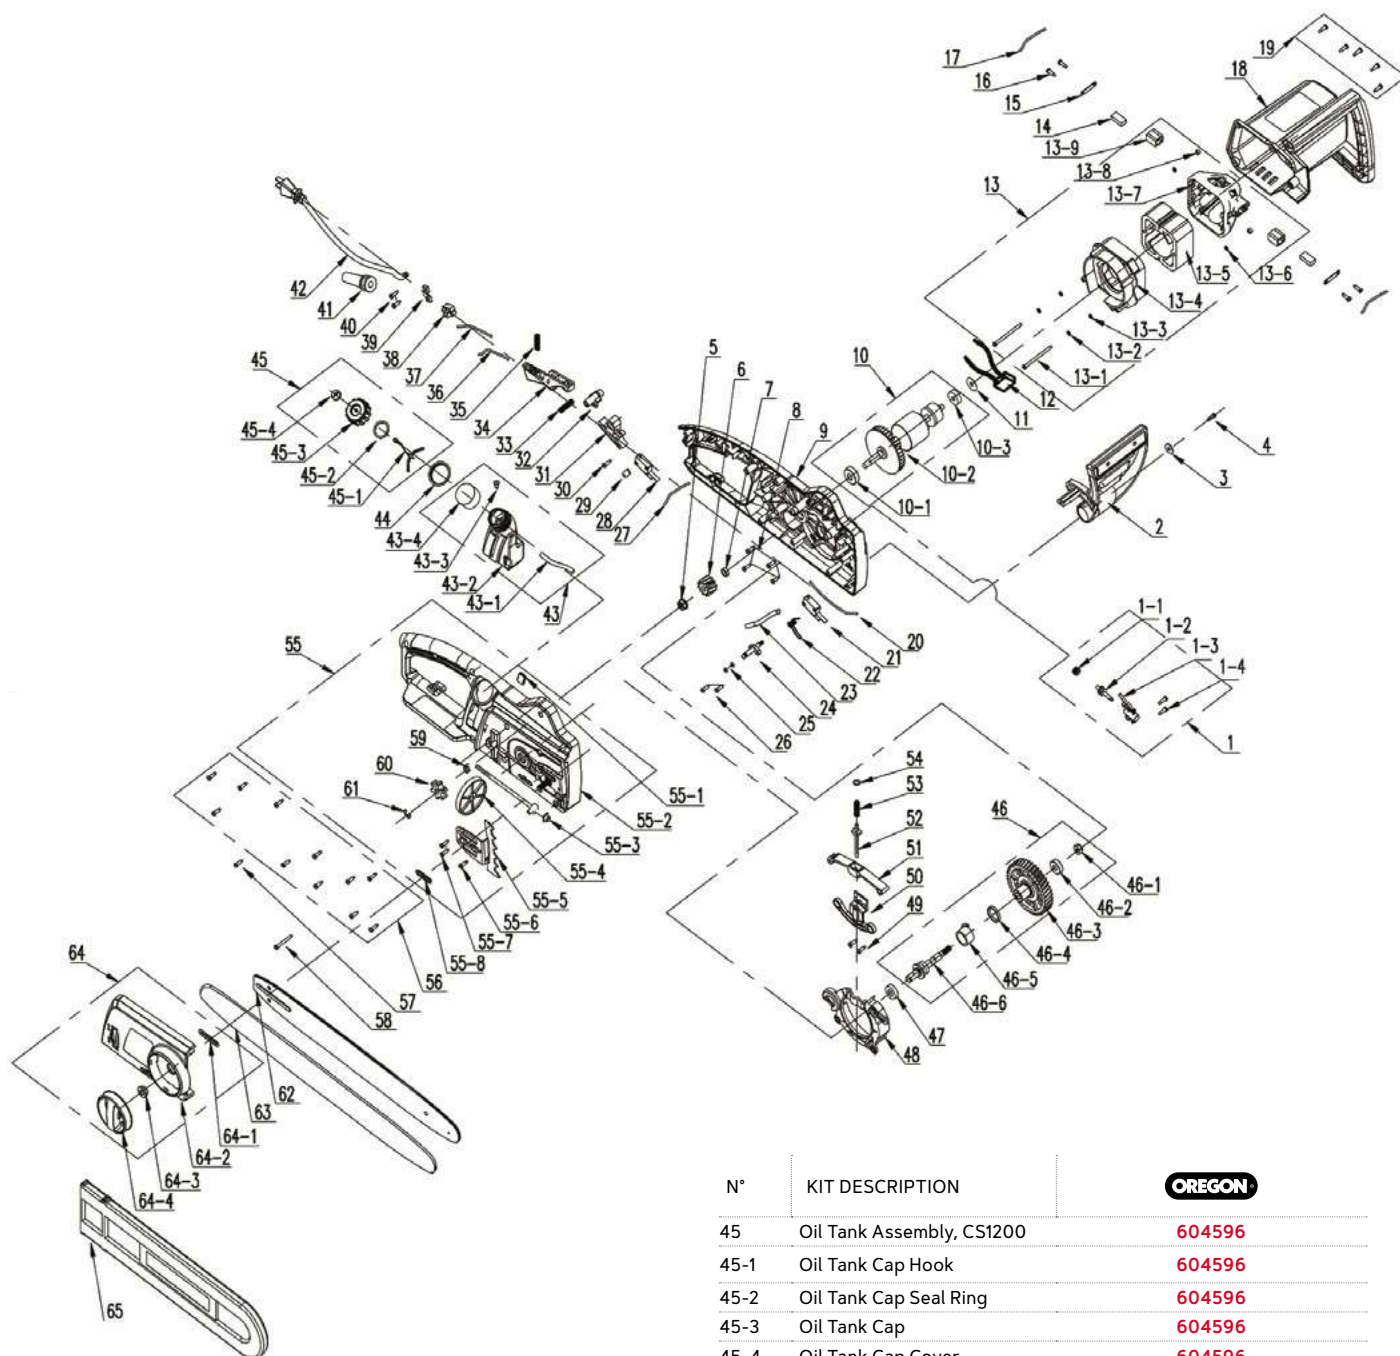

N°	KIT DESCRIPTION	OREGON
45	Oil Tank Assembly, CS1200	604596
45-1	Oil Tank Cap Hook	604596
45-2	Oil Tank Cap Seal Ring	604596
45-3	Oil Tank Cap	604596
45-4	Oil Tank Cap Cover	604596
55-3	Tensioner Assembly	608241
55-4	Tensioner Knob	608241
55-5	Bar Pad	608239
59	Drive Sprocket, CS1200	604597
60	Sprocket	604597
61	E-retaining Ring	604597
62	Guide Bar	140SDEA041 (EU)
63	Saw Chain	Q91VG052E or 91PX052E (EU)
64	Side Cover, CS1200	604595
64-1	End Cap Seal Ring	604595
64-2	Adjust End Cap	604595
64-3	Sha Sleeve	604595
64-4	Compact Knob	604595

PRODUCT NAME	OREGON	SPECIFICATIONS
--------------	--------	----------------



CS1400 - CORDED CHAINSAW 230V

CS1400

Corded chainsaw
230v



603349

612000
UK only

- Power : 2400 Watts
- Bar Length : 16 " (40cm)
- Type of chain : AdvanceCut chain
- Pitch : 3/8" Low-Profile TM
- Gauge : .050" (1.3 mm)
- No Load Chain Speed : 14,7 m/s
- Tool-Less Chain Tensioning System
- Automatic Oiler
- Weight : Only 5.90Kg with guide bar and saw chain attached

Chain **91PX056E**
or
Q91VG056E

Guide Bar 16" **160SDEA041**



SPARE PARTS



N°	KIT DESCRIPTION	OREGON
1	Oil Box Cap Assembly	573657
1-1	Oil Box Cap	573657
1-2	Seal Ring	573657
1-3	Hanger	573657
5	Power Cord Leoni	571066
18	Power Switch	572391
30	Brush x2	581885
31	Brush Holder Clamp x2	581885
32	Self Tapping Screw x4	581885
37	Oil Pump Assembly	574975
37-1	Worm Gear Tooth	574975
37-2	Worm Gear	574975
37-3	Plunger Support	574975

N°	KIT DESCRIPTION	OREGON
37-4	Piston Bush	574975
37-5	Main Part Of Oil Pump	574975
45	Brake Switch	572392
60	Countersunk Head Screw	570965
61	Brake Bar Dead Plate	570965
66-13	Oil-out Seal Ring	600252
70	Clamp	570964
71	Self Tapping Screw	570964
72	Tensioning Spring	570964
73	Sprocket	570964
74	Split Washer	570964
79	Side Cover Assembly	570968
79-1	Side Cover	570968

N°	KIT DESCRIPTION	OREGON
79-2	Axis With The Spring	570968
79-3	Adjusting Knob	570968
79-4	Spring Compression Knob	570968
79-5	Compression Knob	570968
82	Tensioner Kit Assembly	570963
82-1	Shoulder Washer	570963
82-2	Tensioner Plate	570963
82-3	Tensioner Disc	570963
82-4	Inner Locking Ring	570963
82-5	Outer Locking Ring	570963

PRODUCT NAME	OREGON	SPECIFICATIONS
--------------	--------	----------------



CS1500 POWERSHARP - CORDED CHAINSAW 230V

CS1500

Corded chainsaw
230v



604419

579641
UK only

- Power : 2400 Watts
- Bar Length : 18" (45 cm)
- Type of chain : Powersharp chain
- Pitch : 3/8" Low-Profile TM
- Gauge : .050" (1.3 mm)
- Built-in PowerSharp® sharpening system
- No Load Chain Speed : 14,7 m/s
- Variable Speed Trigger
- Tool-Less Chain Tensioning System
- Automatic Oiler
- Weight : Only 6 Kg with guide bar and saw chain attached

Chain


571039

Guide Bar 18"


180SDEA041



 **PowerSharp®**
Sharpening System

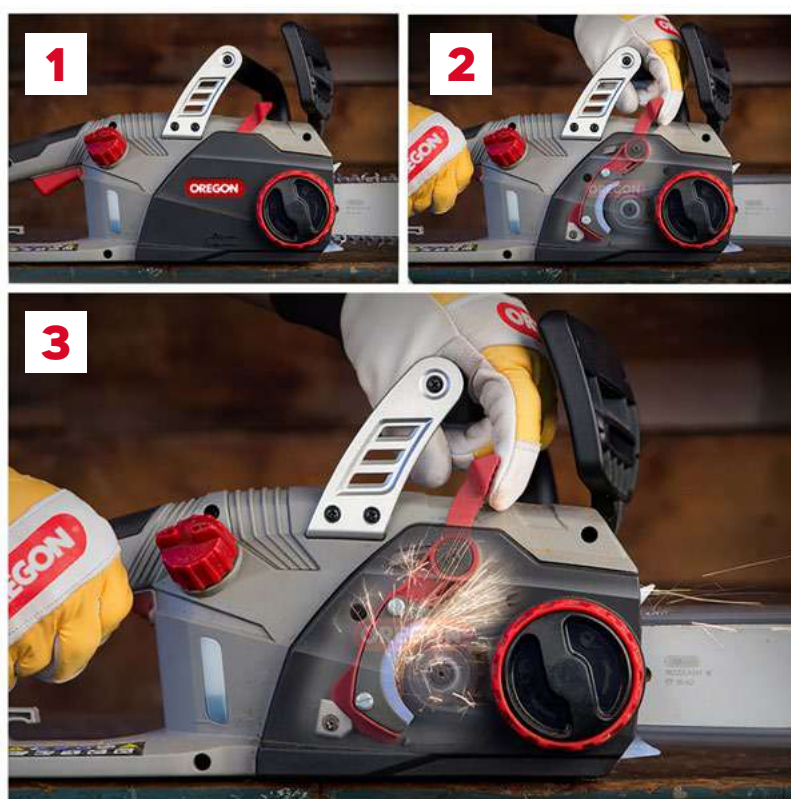

SPARE PARTS

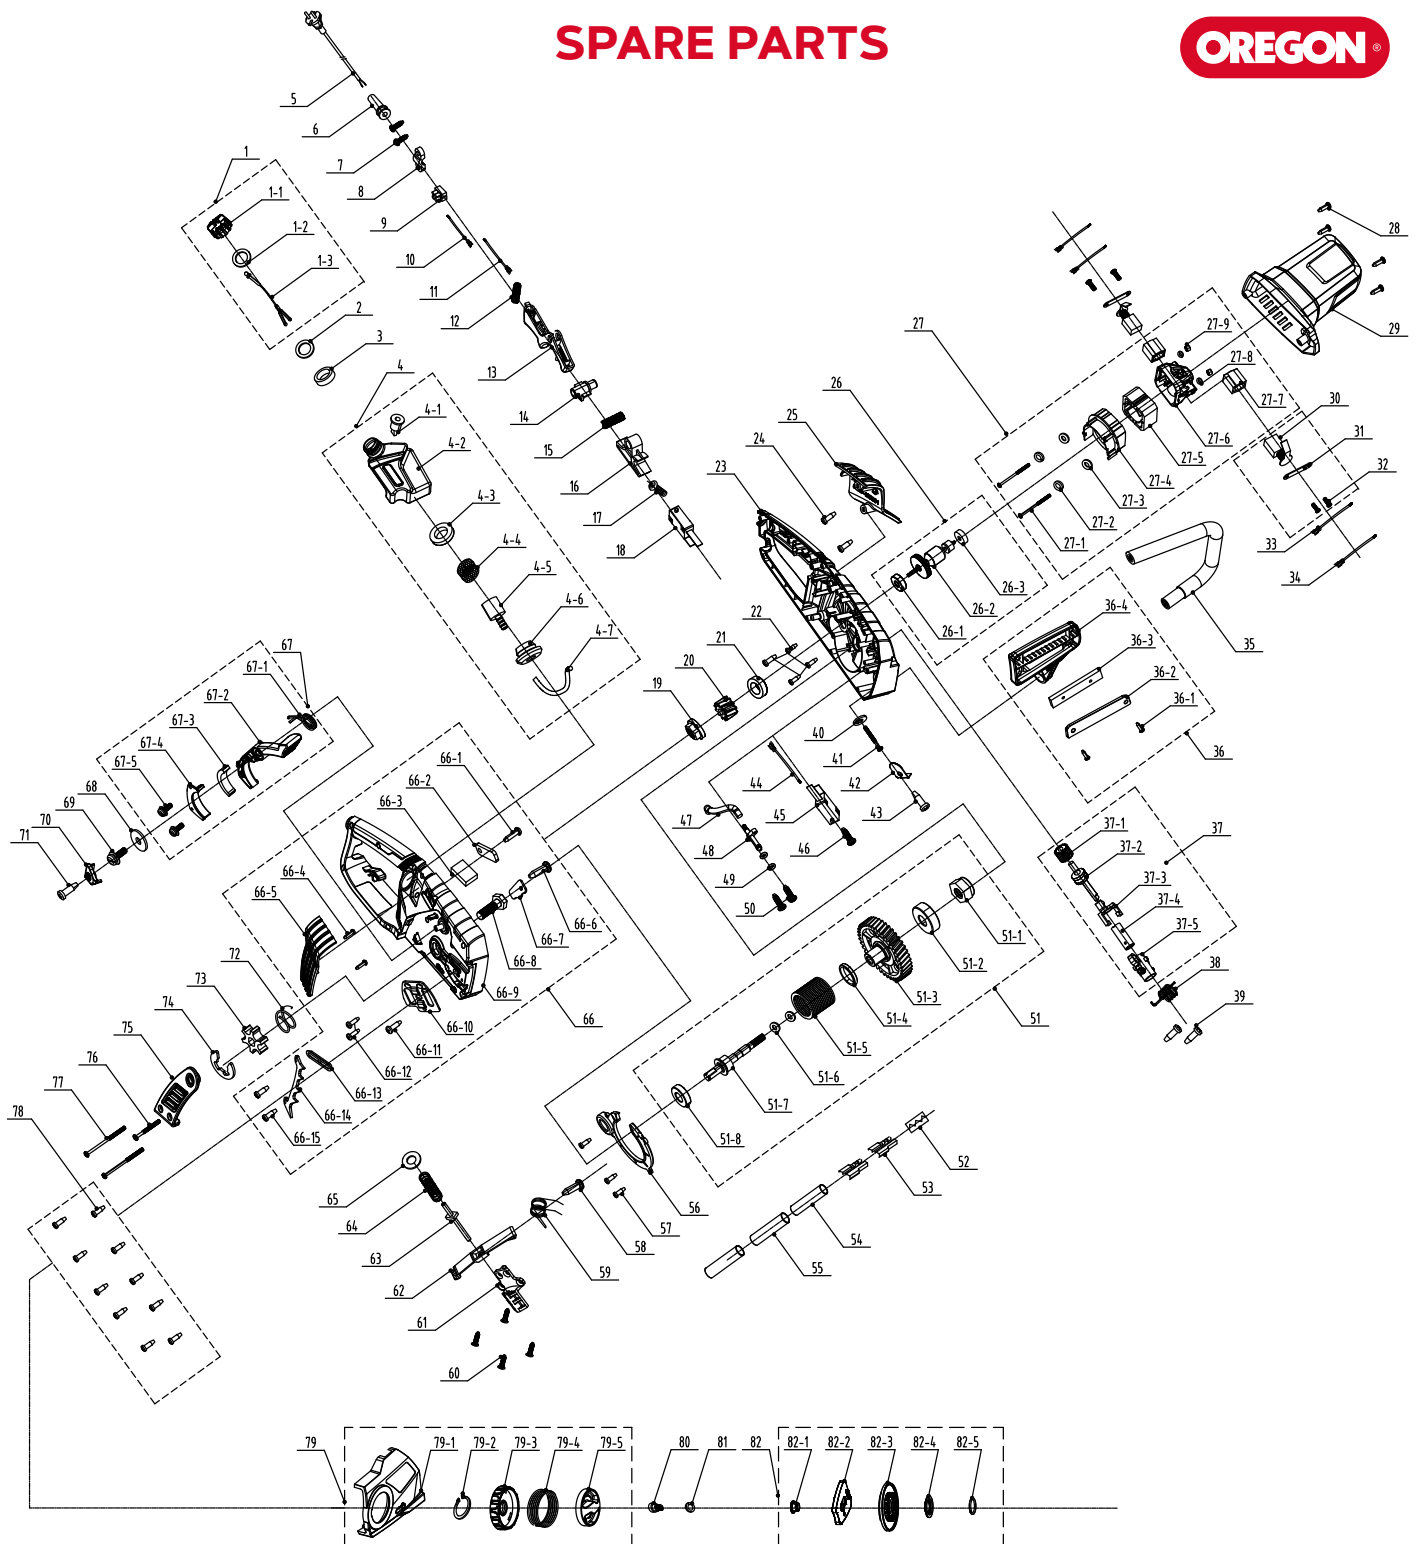

N°	KIT DESCRIPTION	OREGON
1	Oil Box Cap Assembly	573657
1-1	Oil Box Cap	573657
1-2	Seal Ring	573657
1-3	Hanger	573657
5	Power Cord Leoni	571066
18	Power Switch	572391
30	Brush x2	581885
31	Brush Holder Clamp x2	581885
32	Self Tapping Screw x4	581885
37	Oil Pump Assembly	574975
37-1	Worm Gear Tooth	574975
37-2	Worm Gear	574975
37-3	Plunger Support	574975

N°	KIT DESCRIPTION	OREGON
37-4	Piston Bush	574975
37-5	Main Part Of Oil Pump	574975
45	Brake Switch	572392
60	Countersunk Head Screw	570965
61	Brake Bar Dead Plate	570965
66-13	Oil-out Seal Ring	600252
67	PowerSharp Lever Assembly	573657
67-1	PowerSharp Lever Spring	573657
67-2	PowerSharp Lever	573657
70	Clamp	570964
71	Self Tapping Screw	570964
72	Tensioning Spring	570964
73	Sprocket	570964

N°	KIT DESCRIPTION	OREGON
74	Split Washer	570964
79	Side Cover Assembly	570968
79-1	Side Cover	570968
79-2	Axis With The Spring	570968
79-3	Adjusting Knob	570968
79-4	Spring Compression Knob	570968
79-5	Compression Knob	570968
82	Tensioner Kit Assembly	570963
82-1	Shoulder Washer	570963
82-2	Tensioner Plate	570963
82-3	Tensioner Disc	570963
82-4	Inner Locking Ring	570963
82-5	Outer Locking Ring	570963

PRODUCT NAME	OREGON	SPECIFICATIONS
--------------	--------	----------------



CORDED POLE SAW 230V

PS750

Corded
Pole Saw
230v



620371

601688
UK only


- Power : 750 Watts
- Bar Length : 8" (20 cm)
- Type of chain : AdvanceCut chain
- Pitch : 3/8" Low-Profile TM
- Gauge : .050" (1.3 mm)
- No Load Chain Speed : 11,5 m/s
- Tool-Less Chain Tensioning System
- Automatic Oiler
- Weight : Only 3.5 kg with guide bar and saw chain attached
- Tool length fully extended 2.69 m
- Up to 4 m overhead reach

Chain **91PX033E**
or
Q91VG033E

Guide Bar 8" **080SDEA041**



SPARE PARTS

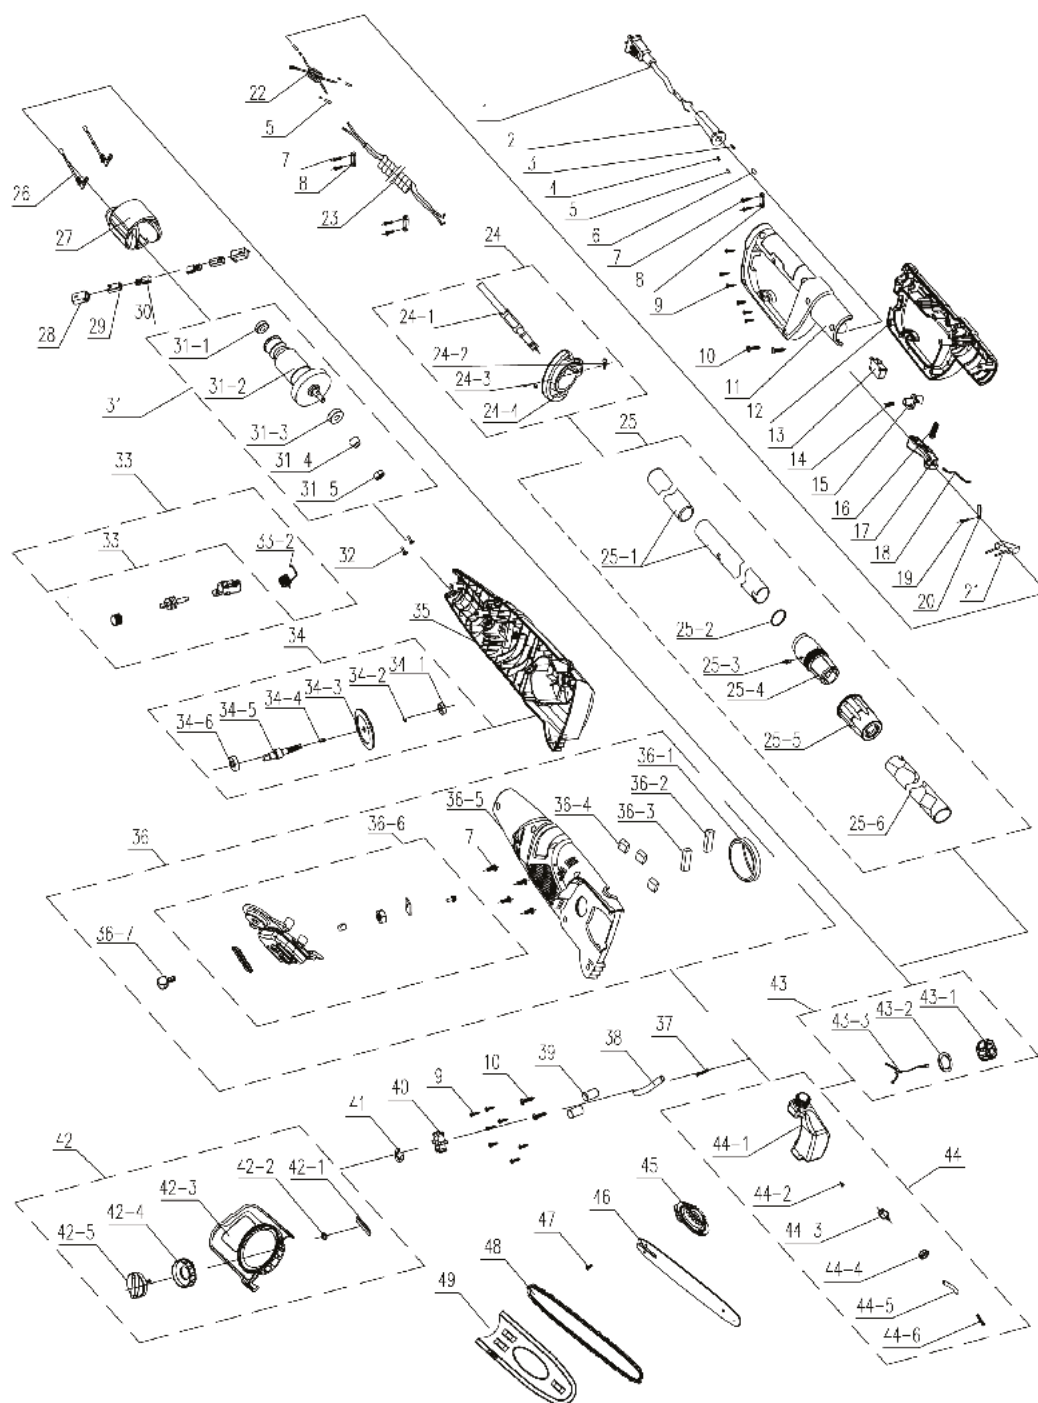

N°	KIT DESCRIPTION	OREGON
40	Drive Sprocket, PS750	604590
41	Split Washer	604590
42	Side Cover, PS750	604588
42-1	Adjusting End Cap	604588
42-2	Locking Knob	604588
42-3	End Cap Seal Ring	604588
42-4	Knob	604588
42-5	Axis With Circlips	604588
44	Oil Tank Assembly, PS750	604589
44-1	Oil Tank	604589

N°	KIT DESCRIPTION	OREGON
44-2	Valve	604589
44-3	Oil Joint Component	604589
44-4	Oil Box Seal Ring	604589
44-5	Transparent Oil Tube	604589
44-6	Tubing Set Spring	604589
45	Tensioner Ring	608240
46	Guide Bar	080SDEA041
47	Tensioner Screw	608240
48	Saw Chain	Q91VG033E or 91PX033E

PRODUCT NAME		OREGON	SPECIFICATIONS
--------------	--	--------	----------------



36V LITHIUM ION BATTERY AND CHARGERS

Lithium Ion
Battery

B742

610078

- Lithium Ion Battery Pack
- 36V
- 4.0 Ah | 144 Wh



Standard
Chargers

C650

594078

596303
UK only

- Standard Charger
- For 36V Lithium Ion Battery Pack



Those 2 items remain available for sale

This product line has been discontinued but replacement kits for maintenance remain available

ST275
String Trimmer



BC600
Brush Cutter



EX600
Extension



PS600
Pole Saw

ST600
String Trimmer



HT275
Hedge Trimmer



LM300
Lawn Mower



PH600
Power Head
Multi-Tool



CS300
Self-Sharpening
Chain Saw



LM400
Lawn Mower



PS250
Pole Saw



BL300
Blower









75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged. Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents. Engineering is the bedrock of our reputation.



PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS.

OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2024 - AD100-010-EN



Discover more of our products at
OregonProducts.com


OREGON[®]

TRIMMER LINES, HEADS AND BLADES

LHB_1.2
EN/EUR





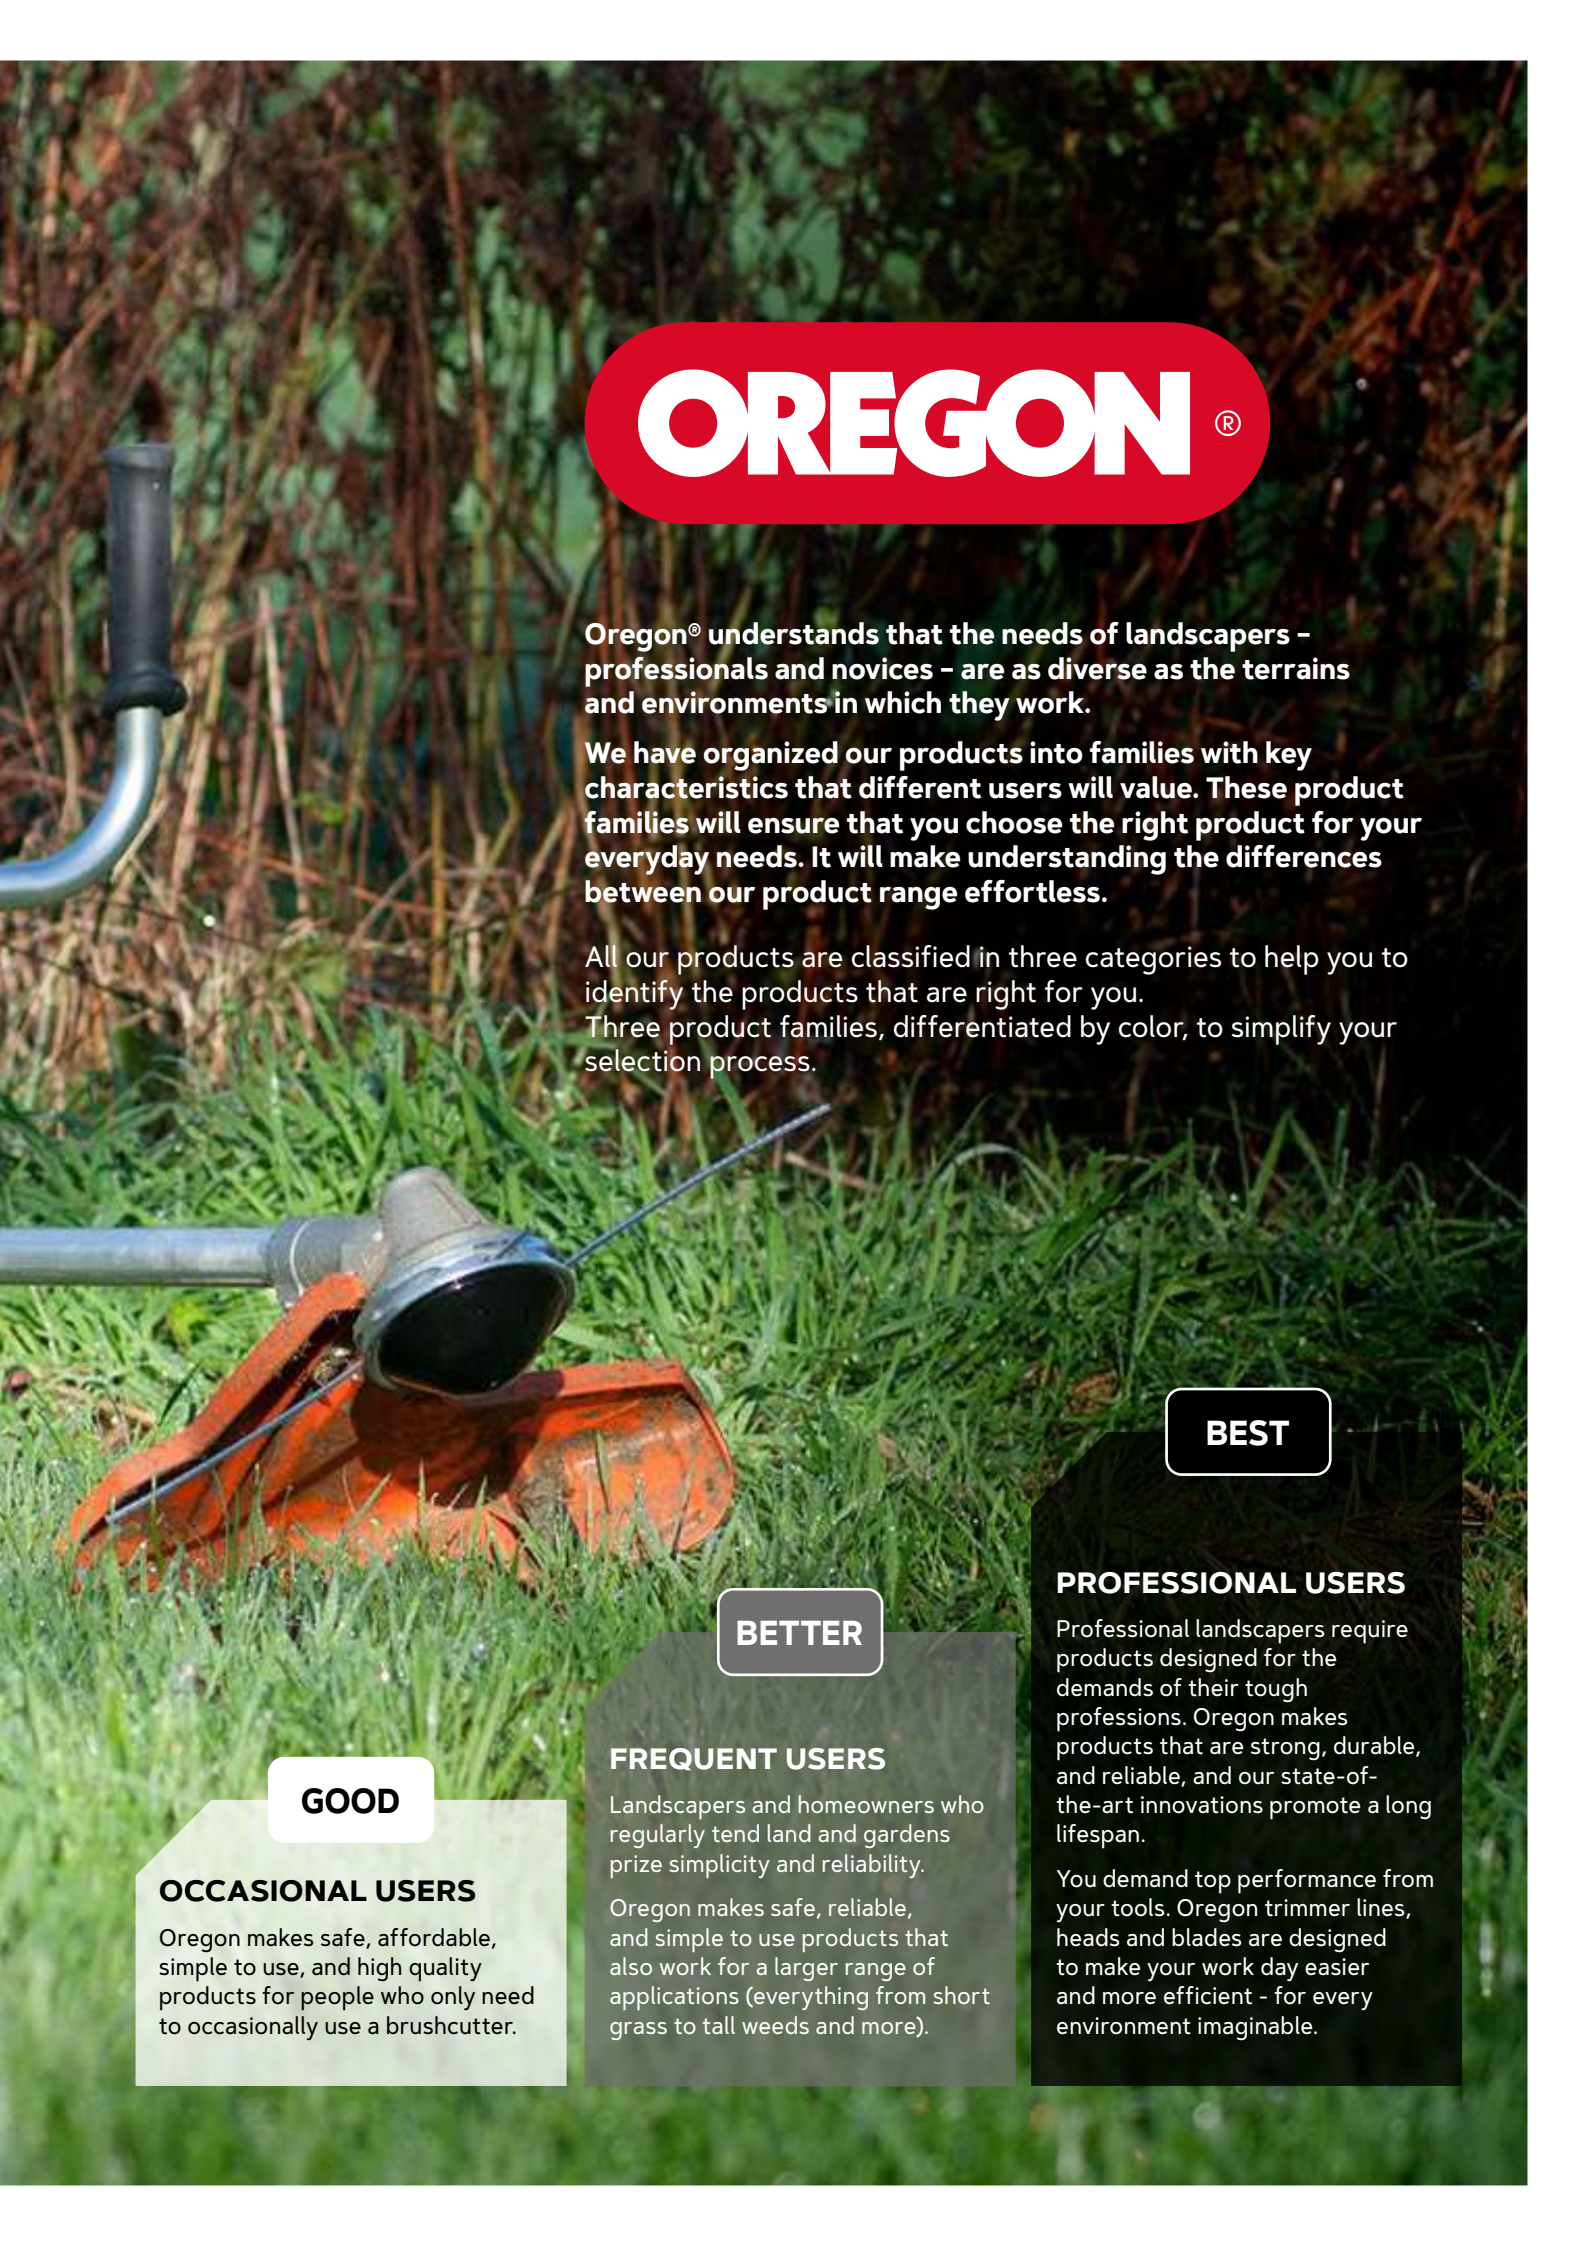

OREGON®

Oregon® understands that the needs of landscapers – professionals and novices – are as diverse as the terrains and environments in which they work.

We have organized our products into families with key characteristics that different users will value. These product families will ensure that you choose the right product for your everyday needs. It will make understanding the differences between our product range effortless.

All our products are classified in three categories to help you to identify the products that are right for you. Three product families, differentiated by color, to simplify your selection process.

GOOD

OCCASIONAL USERS

Oregon makes safe, affordable, simple to use, and high quality products for people who only need to occasionally use a brushcutter.

BETTER

FREQUENT USERS

Landscapers and homeowners who regularly tend land and gardens prize simplicity and reliability.

Oregon makes safe, reliable, and simple to use products that also work for a larger range of applications (everything from short grass to tall weeds and more).

BEST

PROFESSIONAL USERS

Professional landscapers require products designed for the demands of their tough professions. Oregon makes products that are strong, durable, and reliable, and our state-of-the-art innovations promote a long lifespan.

You demand top performance from your tools. Oregon trimmer lines, heads and blades are designed to make your work day easier and more efficient - for every environment imaginable.

GRASS CUTTING SYSTEMS

TRIMMER LINES AND HEADS, BRUSHCUTTER BLADES

Every garden and every piece of land is different. That is why Oregon® has created a wide range of trimmer lines, heads and brushcutter blades, offering something to keep everyone happy.

From the small "Tap & Go" head to highly resistant nylon lines for professionals, it covers everything needed to bring out the best in your garden and make it unique.

TRIMMER LINES

The Oregon® trimmer line range can be listed in two categories:

Monofilament trimmer lines easily trim grass and cut through high weeds because they are manufactured from a mixture of copolymers.

Yellow Line, Coloured Line, Nylum®.


Co-extruded trimmer lines cut through a variety of vegetation. These line types offer users multiple options because of the unique composition of the line cores, embedded materials, and outer skins.

As a result, Oregon co-extruded lines have strong wear resistance for higher performance.

Oregon® offers also three different profiles:

- Round, for simple and efficient cutting
- ★ Star-shaped, for clean and precise cutting
- Square / Toothed, for power and efficiency in denser vegetation

Short grass




High grass and weeds



Brambles and undergrowth



Dry vegetation on rocky soil



Ø 1,3 mm



Coloured Line



Yellow Line
Round - Star - Square



Nylum®
Silencio



Nylum®
Starline

Ø 2 mm



Nylum®
Silencio - Starline - Squareline



TerraMax™



Duoline



Techni 280°

Ø 3,3 mm



Nylum® Squareline



Flexiblade™



Techni-Blade™

Ø 4 mm



Nylum®
Squareline



TerraMax™

Ø 4,5 mm

PREMIUM TECHNICAL LINES

see all Trimmer Line information on pages 15 to 28

STRING TRIMMER - BRUSHCUTTER HEADS

Oregon heads are adaptable for most string trimmers and brushcutters (supplied with washers or adapters).

We offer two categories:



Manual heads come pre-filled with trimmer line. Once you have used up the line, manually reload the head.



Tap & Go heads automatically reload trimmer line. Gently tapping the head onto the ground at full throttle will activate the automatic line feeding feature.

BRUSHCUTTER BLADES

Oregon universal brushcutter blades deliver convenience, because they fit "all" brushcutters.

These European-made steel blades are available in several cutting styles (from two to eight teeth) for all vegetation and soil conditions.

Our brushcutter blades meet all safety and performance requirements, letting you work comfortably and efficiently.




Standard black blades are also available in our range.

One For All red blades (supplied with an adapter) are designed for greater visibility in dense vegetation.



Nylum® Ø 3,75 mm



see all Heads information on pages 29 to 38

see all Brush cutter blades information on pages 39 to 43

PACKAGING AND LABELS

Easier than ever to select what you need

Oregon's packaging and labels make it easier for you to select the best nylon lines for your string trimmer / brushcutter.

Our labelling system displays simpler icons for garden and landscaping applications.

All products feature convenient rating levels so you can decide which products meet your specific needs.






APPLICATIONS

The type of vegetation you can cut is clearly marked on each product.




FEATURES

Each product clearly displays design features.

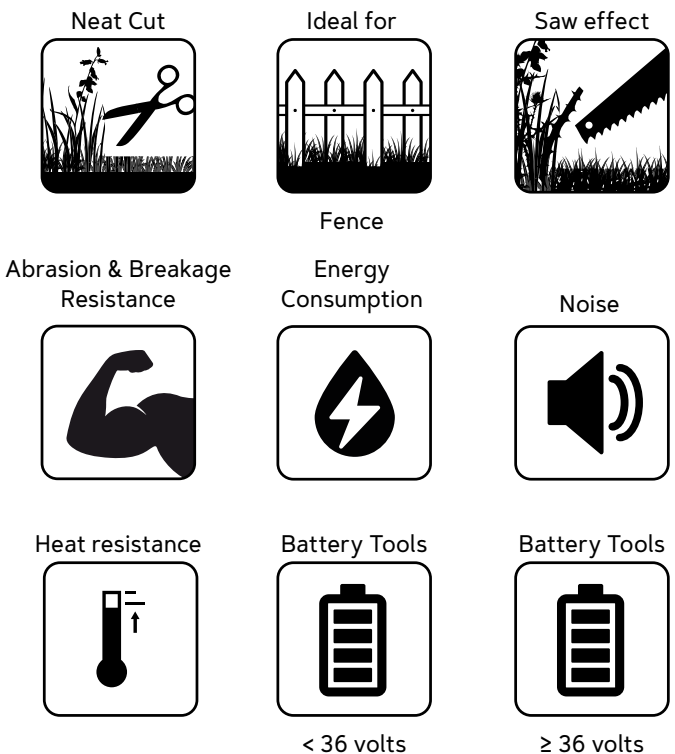

RATING

Key features are rated on a 1 to 5 scale (1 is the lowest; 5 is the highest)



OREGON®

NEW

NYLIUM® SILENCIO LINE

The high resistance of Nylum® with less noise

Oregon®'s new and exclusive trimmer line combines the performance of our best selling Nylum® with a profile specifically designed for battery-powered machines. **Up to 25% more runtime*!**

Nylum Silencio provides better aerodynamic performance, less vibration, and less noise because of a unique new profile. You'll also enjoy high resistance and an excellent cutting performance because of embedded aluminum particles.

Work more efficiently with up to 25% more runtime because Nylum Silencio improves battery runtime and consumes less fuel.

Nylum Silencio is the best choice for users of battery-powered tools.

Cut quietly, with improved battery run-time!



Low grass



High grass & weeds

Excellent aerodynamic properties

High resistance and excellent performance from aluminum particles



Specifically designed for battery tools



Low-noise for a comfortable and healthy cut: up to 10% less noise than traditional round and square profiles



High resistance to abrasion: stronger & longer lifespan



Less energy consumption: Improves battery run time. **Up to 25% more runtime***
Less fuel consumption for petrol brushcutters

APPLICATIONS

This line has been designed to meet battery-powered tool users' needs, but is also suited to petrol trimmers and brushcutters with the advantage of a lower fuel consumption

- For battery-powered string trimmers, Oregon recommends diameters from 1.6mm to 2.4mm (for low and high grass).
- For petrol trimmers / brushcutters, Oregon recommends diameters from 2.4mm to 3.5mm (for heavy/thick grass and weeds).



	⚙	⊙	OREGON	
 < 36 volts	1.6mm	15 m	800001	Small Donut
	2.0mm	15 m	800002	Small Donut
	2.0mm	126 m	800009	Donut
	2.4mm	15 m	800003	Small Donut
	2.4mm	87 m	800010	Donut
 ≥ 36 volts and petrol	2.4mm	240 m	800014	Spool
	2.7mm	15 m	800004	Small Donut
	2.7mm	69 m	800011	Donut
	2.7mm	140 m	800016	Spool
	2.7mm	280 m	800018	Spool
	3.0mm	15 m	800005	Small Donut
	3.0mm	56 m	800012	Donut
	3.0mm	120 m	800017	Spool
	3.0mm	224 m	800019	Spool
	3.5mm	40 m	800013	Donut

See all lengths available p22



OREGON®

NEW

YELLOW LINE

High-quality nylon for a long lifespan

Professional grade trimmer line: high-quality nylon for a long lifespan

Suitable for all trimmer heads

Round, star and square-shaped profiles

Available in diameters from 1.3mm to 4.5mm, and in different lengths and packaging configurations



Low grass



Yellow Roundline



Yellow Starline



Yellow Square Line



		OREGON
1.7mm	15m	69-350-Y
2.0mm	15m	69-356-Y
	127m	69-358-Y
2.4mm	15m	69-362-Y
	88m	69-364-Y
	264m	69-365-Y
2.7mm	15m	69-380-Y
	70m	69-382-Y
	209m	69-383-Y
3.0mm	15m	69-368-Y
	56m	69-370-Y
	169m	69-371-Y
	240m	69-373-Y
3.5mm	41m	69-376-Y
	124m	69-377-Y
4.0mm	32m	69-387-Y
	95m	69-388-Y

NEW

		OREGON
1.7mm	15m	69-440-Y
2.0mm	15m	69-446-Y
	155m	69-448-Y
2.4mm	15m	69-452-Y
	111m	69-454-Y
	332m	69-455-Y
2.7mm	15m	69-430-Y
	92m	69-432-Y
3.0mm	15m	69-458-Y
	71m	69-460-Y
	212m	69-461-Y

		OREGON
2.0	15m	69-406-Y
2.4	15m	69-412-Y
	75m	69-414-Y
	225m	69-415-Y
3.0	48m	69-420-Y
	144m	69-421-Y
4.0	32m	69-478-Y
	95m	69-479-Y

See all lengths available p17-19



NEW

OREGON®

TERRAMAX™

TRIMMER LINE

EASILY CUT DENSE VEGETATION IN HARSH, DRY, AND ROCKY TERRAIN.

The all-new Oregon® TerraMax™ trimmer Line is the ideal trimmer line for professionals working in harsh, dry, and rocky terrain. Made with a high-grade copolymer blend for added strength and stiffness, this line is designed and engineered to help you get the job done in harsh conditions.


- Easily cuts through dense and robust vegetation in harsh, dry, and rocky terrain — ideal for Mediterranean climates
- Made of high-grade copolymers for strength and durability — resists abrasion and fray, absorbs shocks, and reduces breakage
- Outstanding resistance to welding and gluing in head spools
- Engineered extended-pitch design delivers outstanding stability for maximum efficiency and faster cutting
- Tap-and-Go head users will experience easy line feeding and optimum efficiency

Twisted oval shape

Engineered extended pitch

Excellent aerodynamic properties

High resistance and excellent performance from high-grade copolymers



DRY CONDITIONS



ROCKY TERRAIN



**LOW
VEGETATION**



**HIGH
VEGETATION**



**HARSH
VEGETATION**



RECOMMENDATION FOR USE:

2,7 mm and 3,0 mm fitted on tap-and-go heads and ≥ 33 cc brushcutters

3,5 mm, 4,0 mm and 4,5 mm fitted on fixed line heads and ≥ 40 cc brushcutters for heavier-duty application

		OREGON	
2,7 mm	56 m	636779	Donut
2,7 mm	280 m	636774	Spool
3,0 mm	44 m	636778	Donut
3,0 mm	220 m	636773	Spool
3,0 mm	24 cm x 50 pcs	636769	Tube
3,0 mm	35 cm x 50 pcs	636768	Tube
3,5 mm	36 m	636777	Donut
3,5 mm	183 m	636772	Spool
4,0 mm	26 m	636776	Donut
4,0 mm	128 m	636771	Spool
4,5 mm	17 m	636775	Donut
4,5 mm	111 m	636770	Spool

See all lenghts available p25



OREGON®

TRIMMER LINES



Colored line - Pro-Grade

- Professional quality cutting line: high-quality nylon for a long service life
- Suitable for all trimmer heads
- One colour per diameter, for quick and easy selection from 1.3mm to 3.0mm
- Universal round profile: power, clean cut and durability
- Available in 15m (blister), between 56m and 88m (donuts)



SHAPE	DIAMETER	LENGTH	OREGON®	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	
●	1.3mm	15m	69-482-CL	✓				2	2	1	Blister	144
●	1.7mm	15m	69-350-BL	✓				2	2	1	Blister	144
●	2.0mm	15m	69-356-GR	✓				2	2	2	Blister	144
●	2.4mm	15m	69-362-OR	✓	✓			2	2	2	Blister	72
●	2.4mm	88m	69-364-OR	✓	✓			2	2	2	Donut	32
●	2.7mm	15m	69-380-RD	✓	✓			2	2	3	Blister	72
●	2.7mm	70m	69-382-RD	✓	✓			2	2	3	Donut	32
●	3.0mm	15m	69-368-YE	✓	✓	✓		2	2	2	Blister	72
●	3.0mm	56m	69-370-YE	✓	✓	✓		2	2	2	Donut	32
●	3.5mm	15m	69-390-BK	✓	✓	✓		2	2	3	Blister	72





Yellow line - Pro-Grade - Star

- Professional quality cutting line: high-quality nylon for a long service life
- Suitable for all trimmer heads
- Star-shaped profile
- Available in diameters from 1.7mm to 3.0mm, in different lengths and packaging configurations



SHAPE	DIAMETER	LENGTH	OREGON	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	
★	1.7mm	15m	69-440-Y	✓				2	3	2	Hanger	216
★	2.0mm	15m	69-446-Y	✓				2	3	2	Hanger	180
★	2.0mm	1LB/155m	69-448-Y	✓				2	3	2	Donut	32
★	2.4mm	15m	69-452-Y	✓				2	3	2	Hanger	180
★	2.4mm	1LB/111m	69-454-Y	✓				2	3	2	Donut	32
★	2.4mm	3LB/332m	69-455-Y	✓				2	3	2	Spool	12
★	2.7mm	15m	69-430-Y	✓	✓			2	3	2	Hanger	135
★	2.7mm	1LB/92m	69-432-Y	✓	✓			2	3	2	Donut	32
★	3.0mm	15m	69-458-Y	✓	✓			2	3	3	Hanger	135
★	3.0mm	1LB/71m	69-460-Y	✓	✓			2	3	3	Donut	32
★	3.0mm	3LB/212m	69-461-Y	✓	✓			2	3	3	Spool	12

Yellow line - Pro-Grade - Round

- Professional quality cutting line: high-quality nylon for a long service life
- Suitable for all trimmer heads
- Round-shaped profiles
- Available in diameters from 1.7mm to 4.0mm, in different lengths and packaging configurations



SHAPE	DIAMETER	LENGTH	OREGON®	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	
●	1.7mm	15m	69-350-Y	✓				2	2	1	Hanger	216
●	2.0mm	15m	69-356-Y	✓				2	2	2	Hanger	180
●	2.0mm	1LB/127m	69-358-Y	✓				2	2	2	Donut	32
●	2.4mm	15m	69-362-Y	✓	✓			2	2	2	Hanger	180
●	2.4mm	1LB/88m	69-364-Y	✓	✓			2	2	2	Donut	32
●	2.4mm	3LB/264m	69-365-Y	✓	✓			2	2	2	Spool	12
●	2.7mm	15m	69-380-Y	✓	✓			2	2	2	Hanger	135
●	2.7mm	1LB/70m	69-382-Y	✓	✓			2	2	2	Donut	32
●	2.7mm	3LB/209m	69-383-Y	✓	✓			2	2	2	Spool	12
●	3.0mm	15m	69-368-Y	✓	✓	✓		2	2	3	Hanger	135
●	3.0mm	1LB/56m	69-370-Y	✓	✓	✓		2	2	3	Donut	32
●	3.0mm	3LB/169m	69-371-Y	✓	✓	✓		2	2	3	Spool	12
●	3.5mm	1LB/41m	69-376-Y	✓	✓	✓		2	2	3	Donut	32
●	3.5mm	3LB/124m	69-377-Y	✓	✓	✓		2	2	3	Spool	12
●	4.0mm	1LB/32m	69-387-Y	✓	✓	✓		2	2	4	Donut	32
●	4.0mm	3LB/95m	69-388-Y	✓	✓	✓		2	2	4	Spool	12

Yellow line - Pro-Grade - Square

- Professional quality cutting line: high-quality nylon for a long service life
- Suitable for all trimmer heads
- Square-shaped profiles
- Available in diameters from 2.0mm to 4.0mm, in different lengths and packaging configurations



SHAPE	DIAMETER	LENGTH	OREGON®	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	
	2.0mm	15m	69-406-Y	✓	✓			2	4	3	Hanger	135
	2.4mm	15m	69-412-Y	✓	✓			2	4	3	Hanger	135
	2.4mm	1LB/75m	69-414-Y	✓	✓			2	4	3	Donut	32
	2.4mm	3LB/225m	69-415-Y	✓	✓			2	4	3	Spool	12
	3.0mm	1LB/48m	69-420-Y	✓	✓	✓		2	4	3	Donut	32
	3.0mm	3LB/144m	69-421-Y	✓	✓	✓		2	4	3	Spool	12
	4.0mm	1LB/32m	69-478-Y	✓	✓	✓		2	4	4	Donut	32
	4.0mm	3LB/95m	69-479-Y	✓	✓	✓		2	4	4	Spool	12

Nylium® Starline® - for precise cuts

- Nylium embedded aluminium particles increase the line conductivity and cool down properties
- Outstanding resistance to breakage at the head eyelets
- High resistance to line welding inside heads
- Available in diameters from 1.3mm to 3.3mm, and in different lengths and packaging configurations
- The star shape cuts grass neatly for a splendid green lawn
- The star shape reduces engine drag compared with standard round shape line




SHAPE	DIAMETER	LENGTH	OREGON®	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	
★	1.3mm	15m	533744	✓				3	3	2	Donut	42
★	1.6mm	15m	533745	✓				3	3	2	Donut	42
★	2.0mm	15m	581222	✓				3	3	2	Donut	42
★	2.4mm	15m	110985E	✓	✓			3	3	3	Donut	42
★	2.4mm	90m	104883E	✓	✓			3	3	3	Donut	8
★	2.4mm	360m	104885E	✓	✓			3	3	3	Spool	8
★	2.7mm	15m	559054	✓	✓			3	3	3	Donut	30
★	2.7mm	70m	110987E	✓	✓			3	3	3	Donut	8
★	2.7mm	280m	559055	✓	✓			3	3	3	Spool	8
★	3.0mm	15m	110986E	✓	✓	✓		3	3	3	Donut	30
★	3.0mm	60m	104884E	✓	✓	✓		3	3	3	Donut	8
★	3.0mm	240m	104886E	✓	✓	✓		3	3	3	Spool	8
★	3.3mm	200m	106361E	✓	✓	✓		3	3	3	Spool	8




Nylium® Square Line - for Performance cuts

- Better conductivity thanks to aluminium particles
- High resistance to breakage at the head eyelet
- Rugged square profile for use on dry vegetation on rocky ground
- Up to 27% greater efficiency than its round equivalent
- Available in diameters from 2.4mm to 4.0mm, and in different lengths and packaging configurations



+27%

Rugged square shape offers 27% more working nylon material versus the round equivalent (27% more weight per meter)

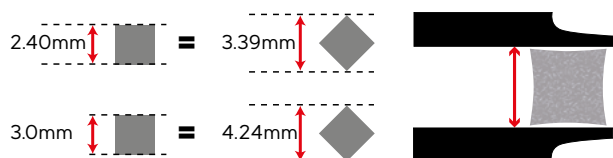

SHAPE	DIAMETER	LENGTH	OREGON®	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	
■	2.4mm	60m	109521E	✓	✓			4	4	3	Donut	8
■	2.4mm	245m	109523E	✓	✓			4	4	3	Spool	8
■	2.55mm	42cm	295371E	✓	✓			4	4	3	Precut x100	35
■	3.0mm	40m	109522E	✓	✓	✓		4	4	3	Donut	8
■	3.0mm	150m	109524E	✓	✓	✓		4	4	3	Spool	8
■	3.5mm	30m	539165	✓	✓	✓	✓	4	4	4	Donut	8
■	3.75mm	42cm	295372E	✓	✓	✓	✓	4	4	4	Precut x50	35
■	3.75mm	42cm	514820	✓	✓	✓	✓	4	4	4	Precut x220	8
■	3.75mm	100m	295314E	✓	✓	✓	✓	4	4	4	Spool	8
■	4.0mm	22m	539166	✓	✓	✓	✓	4	4	4	Donut	8
■	4.0mm	81m	581221	✓	✓	✓	✓	4	4	4	Spool	8

Nylium® Silencio Line - for Extended battery Usage

- Low-noise for a comfortable and healthy cut
- High resistance to abrasion: stronger, longer lifespan, less investment.
- Embedded aluminum particles improve the line's conductivity, reducing line breakage and line welding in the head.
- Battery energy saving: the battery lasts longer.
- Less fuel consumption for petrol brush cutters.
- For battery-powered string trimmers, Oregon recommends diameters from 1.6 mm to 2.4 mm (for low and high grass).
- For petrol trimmers / brushcutters, Oregon recommends diameters from 2.4mm to 3.5mm (for heavy/thick grass and weeds).



SHAPE	DIAMETER	LENGTH	OREGON	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING		BATTERY / PETROL
●	1.6mm	15m	800001	✓				3	1	1	Donut	42	≤36V
●	2.0mm	15m	800002	✓				3	1	1	Donut	42	≤36V
●	2.0mm	126m	800009	✓				3	1	1	Donut	8	≤36V
●	2.4mm	15m	800003	✓	✓			3	1	1	Donut	42	≤36V
●	2.4mm	87m	800010	✓	✓			3	1	1	Donut	8	≤36V
●	2.4mm	240m	800014	✓	✓			3	1	1	Spool	8	≤36V
●	2.7mm	15m	800004	✓	✓			3	1	1	Donut	30	>36V
●	2.7mm	69m	800011	✓	✓			3	1	1	Donut	8	>36V
●	2.7mm	140m	800016	✓	✓			3	1	1	Spool	8	>36V
●	2.7mm	280m	800018	✓	✓			3	1	1	Spool	8	>36V
●	3.0mm	15m	800005	✓	✓	✓		3	1	1	Donut	30	Petrol
●	3.0mm	56m	800012	✓	✓	✓		3	1	1	Donut	8	Petrol
●	3.0mm	120m	800017	✓	✓	✓		3	1	1	Spool	8	Petrol
●	3.0mm	224m	800019	✓	✓	✓		3	1	1	Spool	8	Petrol
●	3.5mm	40m	800013	✓	✓	✓		3	1	1	Donut	8	Petrol





Duoline - Strength and Flexibility

- Its composition - 30% rigid carbon core, and 70% more flexible outer skin - enables it to more easily absorb shocks, and reduce the risk of breakages at the eyelet.
- Available in diameters from 2.0mm to 4.0mm, and in different lengths and packaging configurations.



SHAPE	DIAMETER	LENGTH	OREGON®	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	
●	2.0mm	15m	591609	✓				3	2	2	Donut	42
●	2.4mm	15m	295367E	✓	✓			3	2	2	Donut	42
●	2.4mm	90m	106501E	✓	✓			3	2	2	Donut	8
●	2.4mm	180m	106503E	✓	✓			3	2	2	Spool	8
●	2.7mm	70m	545828	✓	✓			3	2	2	Donut	8
●	2.7mm	140m	545829	✓	✓			3	2	2	Spool	8
●	3.0mm	15m	295368E	✓	✓	✓		3	2	3	Donut	30
●	3.0mm	60m	106502E	✓	✓	✓		3	2	3	Donut	8
●	3.0mm	120m	106504E	✓	✓	✓		3	2	3	Spool	8
●	3.5mm	40m	533742	✓	✓	✓	✓	3	2	3	Donut	8
●	3.5mm	84m	581219	✓	✓	✓	✓	3	2	3	Spool	8
●	4.0mm	64m	581220	✓	✓	✓	✓	3	2	4	Spool	8



Techni 280° - Performance and Heat Resistance

- Up to 30 % more robust than the standard round line.
- Extremely resistant to notching and wear
- High melting point >280°: Lower breakage risk, and prevents the line from sticking inside the head
- Available in diameters from 2.5mm to 3.0mm, and in different lengths and packaging configurations



SHAPE	DIAMETER	LENGTH	OREGON®	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	
	2.5mm	15m	564844	✓	✓	✓		4	2	3	Donut	42
	2.5mm	81m	545819	✓	✓	✓		4	2	3	Donut	8
	2.5mm	324m	545822	✓	✓	✓		4	2	3	Spool	8
	2.7mm	15m	564843	✓	✓	✓	✓	4	2	3	Donut	30
	2.7mm	70m	545820	✓	✓	✓	✓	4	2	3	Donut	8
	2.7mm	280m	545823	✓	✓	✓	✓	4	2	3	Spool	8
	3.0mm	15m	564842	✓	✓	✓	✓	4	2	4	Donut	30
	3.0mm	56m	545821	✓	✓	✓	✓	4	2	4	Donut	8
	3.0mm	224m	545824	✓	✓	✓	✓	4	2	4	Spool	8



TerraMax - Harsh Vegetation, Rocky terrain

- Easily cuts through dense and robust vegetation in harsh, dry, and rocky terrain ideal for Mediterranean climates
- High-grade copolymers : resists abrasion, absorbs shocks, and reduces breakage
- Outstanding resistance to welding and gluing in head spools
- Extended-pitch design delivers outstanding stability for maximum efficiency and faster cutting
- Tap-and-Go head users will experience easy line feeding and optimum efficiency

SHAPE	DIAMETER	LENGTH	OREGON	LOW GRASS	HIGH GRASS	ROCKY SOILS	HARSH VEGETATION	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	
	2,7 mm	56m	636779	✓	✓	✓	✓	4	3	3	Donut	
	2,7 mm	280m	636774	✓	✓	✓	✓	4	3	3	Spool	
	3,0 mm	44m	636778	✓	✓	✓	✓	4	3	3	Donut	
	3,0 mm	220m	636773	✓	✓	✓	✓	4	3	3	Spool	
	3,0 mm	24cm	636769	✓	✓	✓	✓	4	3	3	Precut x50	
	3,0 mm	35cm	636768	✓	✓	✓	✓	4	3	3	Precut x50	
	3,5 mm	36m	636777	✓	✓	✓	✓	4	3	4	Donut	
	3,5 mm	183m	636772	✓	✓	✓	✓	4	3	4	Spool	
	4,0 mm	26m	636776	✓	✓	✓	✓	4	3	4	Donut	
	4,0 mm	128m	636771	✓	✓	✓	✓	4	3	4	Spool	
	4,5 mm	17m	636775	✓	✓	✓	✓	4	3	4	Donut	
	4,5 mm	111 m	636770	✓	✓	✓	✓	4	3	4	Spool	

Flexi-Blade™ - For Highly Demanding Applications


- Composition - 50% flexible core and 50% reinforced outer skin, this co-extruded line offers outstanding performance and durability.
- Silent and aerodynamic profile (low fuel consumption)
- Designed for Jet-Fit™ aluminium heads
- High melting point 255°C
- Up to 27% greater efficiency than its round equivalent
- Reinforced surface and aggressive teeth for exceptional performance
- Available in diameters from 2.5mm to 4.0mm, and in different lengths and packaging configurations



+27%

Rugged square shape offers 27% more working nylon material versus the round equivalent (27% more weight per meter)

2.50mm 2.65mm	=	3.54mm 3.75mm
3.0mm 3.5mm 4.0mm	=	4.24mm 4.95mm 5.66mm



SHAPE	DIAMETER	LENGTH	OREGON	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	
	2.5mm	26cm	111112E	✓	✓			5	4	3	Precut x50pc	40
	2.5mm	53m	111080E	✓	✓			5	4	3	Donut	8
	2.5mm	281m	111086E	✓	✓			5	4	3	Spool	8
	2.7mm	47m	111081E	✓	✓			5	4	3	Donut	8
	2.7mm	250m	111087E	✓	✓			5	4	3	Spool	8
	3.0mm	26cm	111114E	✓	✓		✓	5	4	4	Precut x35pc	40
	3.0mm	37m	111082E	✓	✓		✓	5	4	4	Donut	8
	3.0mm	195m	111088E	✓	✓		✓	5	4	4	Spool	8
	3.5mm	26cm	111115E	✓	✓		✓	5	4	4	Precut x25pc	40
	3.5mm	27m	111084E	✓	✓		✓	5	4	4	Donut	8
	3.5mm	143m	111090E	✓	✓		✓	5	4	4	Spool	8
	4.0mm	26cm	111116E	✓	✓		✓	5	4	4	Precut x20pc	40
	4.0mm	21m	111085E	✓	✓		✓	5	4	4	Donut	8
	4.0mm	110m	111091E	✓	✓		✓	5	4	4	Spool	8




Techni-Blade™ - Precision, Durability and Speed

- Designed for Jet-Fit™ aluminium heads 111110 and 111111
- Composition - 50% flexible core and 50% reinforced outer skin, this co-extruded line offers outstanding performance and durability.
- Silent and aerodynamic profile (low fuel consumption)
- High melting point >255°
- As sharp as a blade, pinch-hardened teeth for outstanding efficiency
- Available in precut 26cm pieces and 5.0mm, 6.0mm and 7.0mm sizes



+27%

Rugged square shape offers 27% more working nylon material versus the round equivalent (27% more weight per meter)





SHAPE	DIAMETER	LENGTH	OREGON®	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	
	5.0mm	26cm	539176	✓	✓		✓	5	4	4	Precut x70pc	66
	6.0mm	26cm	539175	✓	✓		✓	5	4	4	Precut x50pc	66
	6.0mm	26cm	525243	✓	✓		✓	5	4	4	Precut x205pc	12
	7.0mm	26cm	539174	✓	✓		✓	5	4	4	Precut x40pc	66
	7.0mm	26cm	525244	✓	✓		✓	5	4	4	Precut x155pc	12
	6.0mm + 7.0mm	26cm	525242 JET-FIT™ HEAD (111111) + TECHNI BLADE™ KIT	✓	✓		✓	5	4	4	Precut 155pc + 205pc	6



TECH TIP

Keep Techni-Blade™ in its original package and make sure the sponge is always wet and the tube closed.

Do not store in over-heated, dry places.





TRIMMER HEADS





GOOD



≤30cc



Low grass




Mini tap and go heads

- Two-line Tap and Go heads to fit most popular bent shaft trimmers : STIHL®, MC CULLOCH®, RYOBI® and HOMELITE®
- Model Q111140 fits STIHL® FS38, 40, 45, 50 and FSE60, 81
- Fitted with OREGON® 2.0mm trimmer line

PRODUCT NAME	OREGON®	SPECIFICATIONS			
Q111140		for Stihl® FS 38, FS 40, FS 45, FS 50, FSE 60, FSE 81			
Q111139		for McCulloch®			
Q111138		for Ryobi®			
Q111137		for Homelite®			
295294		replacement knob for Q111137 & Q111138			

Mini
tap & go
head

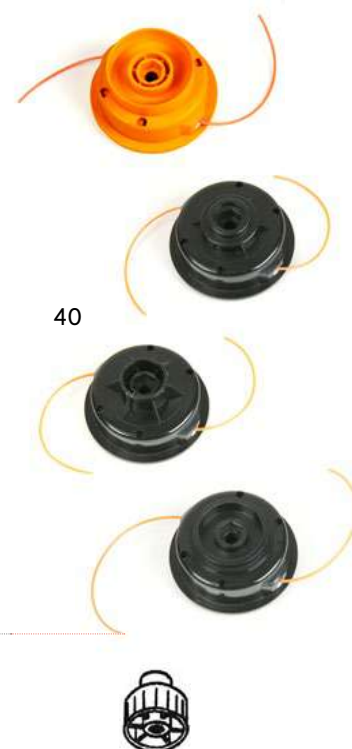



Standard manual heads

- Extended eyelets to prevent premature line breakage
- To be mounted with bolts
- Fitted with Nylum Starline 2.4mm

PRODUCT NAME	OREGON	SPECIFICATIONS			
--------------	--------	----------------	--	---	---

Standard
Manual
Heads


- 108461A**
- 2-Line standard manual head
 - Requires a bolt to be mounted on trimmer or brushcutter
 - (Bolt not included - refer to bolt list below)
- 110982A**
- 110982A with protruding studs




≤3.0mm

8

OREGON		
90177T	Bolt 8 X 125 Left Hand	50
91323T	Bolt 10 X 100 Left Hand (Stihl)	50
90178T	Bolt 10 X 125 Left Hand	50
90179T	Bolt 12 X 150 Left Hand	50
90180T	Bolt 12 X 175 Left Hand	50
90171T	Bolt 8 X125 Left Hand	50

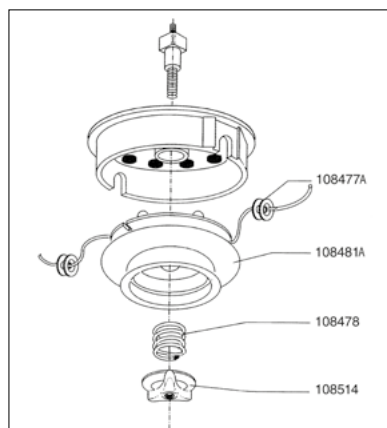


108461A

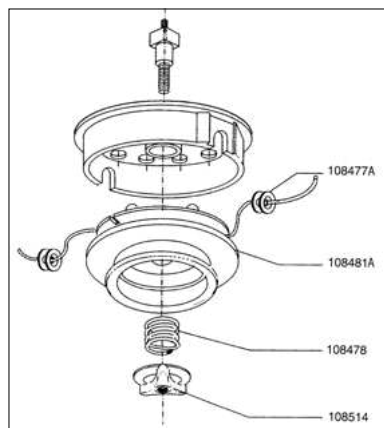

110982A



BETTER



Low grass



High grass
& weeds



Easy Load




Easy Fit




Lightning Load™ heads


- Fits 90% of brushcutters
- Heavy duty heads for intensive use
- High loading capacity
- Easy fit; no need to disassemble head for mounting
- Adaptor fitting significantly reduces vibrations
- Delivered with Techni 280°
- OREGON® exclusive



PRODUCT NAME	OREGON	SPECIFICATIONS			
Lightning Load™ heads	559060	• Diameter 109mm • Fit most ≤33cc brushcutters • Delivered with 4 adaptors		M8 x 1.25 LHM M8 x 1.25 LHF M10 x 1.25 LHF M10 x1 LHF	●★ ≤3mm ■ <3mm 12
	559059	• Diameter 130mm • Fit most >33cc brushcutters • Delivered with 4 adaptors		M8 x 1.25 LHM M10 x 1 LHF M10 x 1.25 LHF M12 x 1.5 LHF M12 x 1.75 LHF	●★ ≤4mm ■ <3.5mm 12

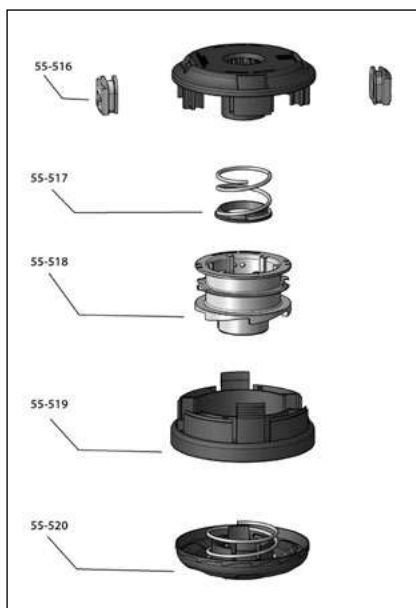


559060

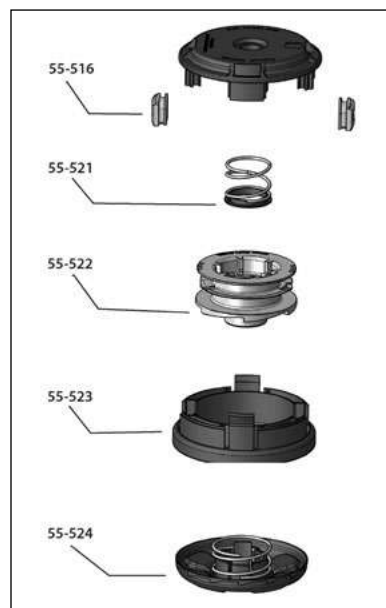

559059


Mounting

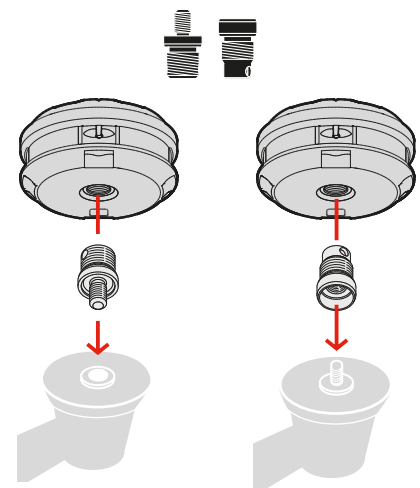



BETTER

≥25cc



Low grass



High grass
& weeds



Easy Load




Easy Fit



Boltless Universal heads

- Fits most brushcutters
- Heavy duty heads for intensive use
- Durable aluminium knob (539137 only)
- Wear resistant brass eyelet
- OREGON® exclusive



PRODUCT NAME	OREGON	SPECIFICATIONS			
--------------	--------	----------------	--	--	--

Boltless
Universal
Head

539138

- Diameter 109mm
- Fit most **≤33cc** brushcutters (washers included)



≤2.4mm

12

539137

- Diameter 130mm
- Fit most **>33cc** brushcutters. Mounts like a blade with no washers Durable aluminium knob



≤3.0mm


12

Mounts like a blade, no bolts


539137



539138

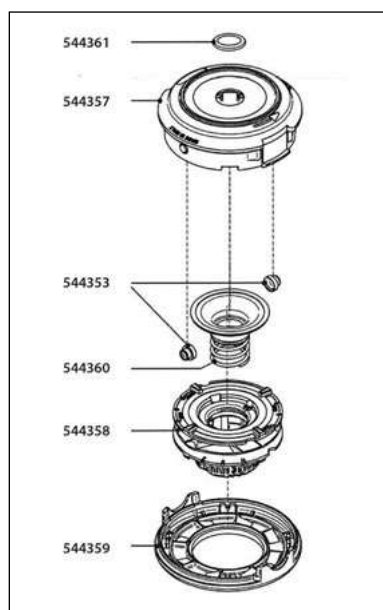

539137

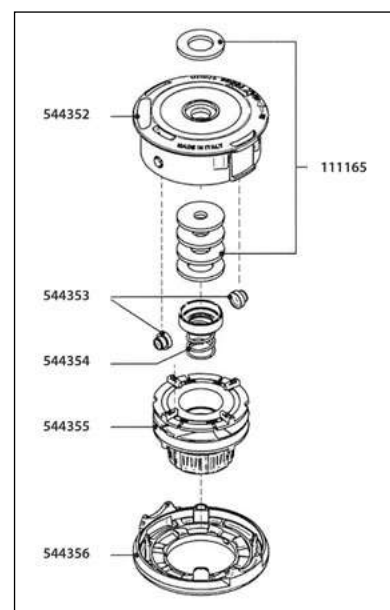

539138



110980

Aluminium fixed line head

- Fits most straight shaft trimmers (washers included)
- Delivered with 42 cm pre-cut square Nylum® (2.55mm and 3.75mm)
- Designed to carry two or four double pieces of preformed square Nylum® line

PRODUCT NAME	OREGON			
--------------	--------	--	--	--

Aluminium Fixed line head

110980



2.55mm or 3.75mm only

40

BETTER

≥25cc



High grass & weeds



Rocky soil

MANUAL



RECOMMENDED USE

		
	2,55mm	3,75mm
		
≤ 35cc	✓	
36cc - 40cc	✓	✓
41cc - 45cc	✓	✓
≥ 46cc	✓	✓

Nylum® Square Line

High performing trimmer line, recommended for head 110980
See page 17 for more informations.

SHAPE		LENGTH	OREGON		
	2.55mm	42cm	295371E	Precut x100	35
	3.75mm	42cm	295372E	Precut x50	35
	3.75mm	42cm	514820	Precut x220	8





111110

111111

BEST

≥25cc



Low grass



High grass
& weeds



Brambles



Rocky soil

Aluminium Jet-Fit™ heads

- Fits most straight shaft trimmers ≥ 25cc (washers included)
- Two models: two lines and four line heads
- Easy load precut lines
- Designed for intensive use
- Supplied with Flexiblade™ precut lines (3.0mm and 4mm)




MANUAL


PRODUCT NAME	OREGON	SPECIFICATIONS			
Aluminium Jet-Fit™ heads	111110	• Two-line Aluminium head • Fit most ≥25cc brushcutters		≤4mm	30
	111111	• Four-line Aluminium head • Fit most ≥40cc brushcutters			
Aluminium Jet-Fit™ heads Contractor pack	539167	• 7x Contractor pack (2-line head) • Fit most ≥25cc brushcutters		≤4mm	6
	539168	• 5x Contractor pack (4-line head) • Fit most ≥40cc brushcutters			

111151

Metal Reinforced bumper available as replacement only

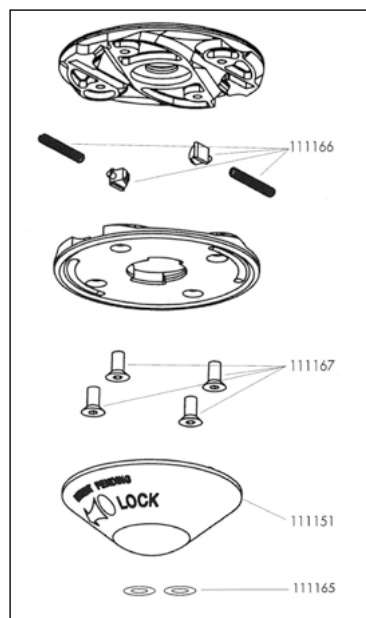


111110

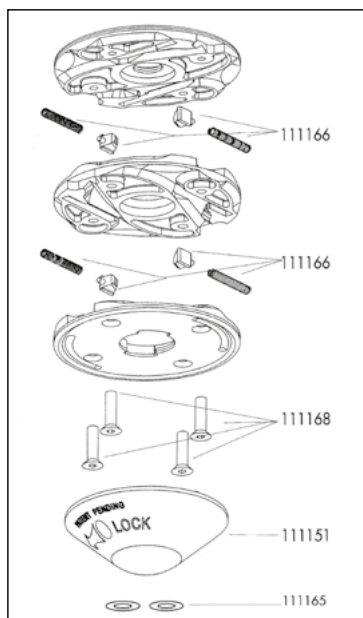

111111

Mounting

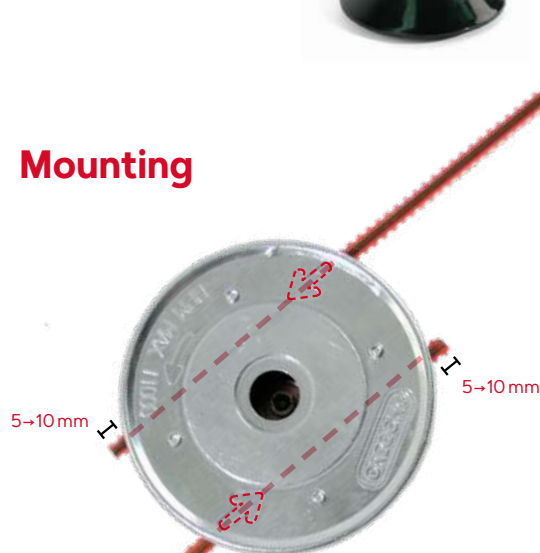



Universal trimmer guard

- Universal guards for nylon heads and steel blades
- Easy and fast assembly
- Excellent protection against flying debris and stones
- Delivered complete with metal mounting clamps
- Mounting kit to fit $\varnothing$ 24 – 26 – 28mm shafts included
- Removable lower guard for nylon head with nylon cutting knife

PRODUCT NAME	OREGON	SPECIFICATIONS	
Universal trimmer guard	552635	• Diameter 380mm • Fit most ≤33cc brushcutters	40
	552636	• Diameter 420.0mm • Fit most >33cc brushcutters	

OREGON®

BRUSHCUTTER BLADES





ONE FOR ALL

Brushcutter Blades

- Universal brushcutter blade
- Reduce range by half - easy selection on application
- Delivered complete with reducer ring to fit ALL brushcutters
- High quality hardened steel - 42-48 HRC
- Compliant with European directive 2006/42/EC and ISO 7113
- Red color provides better visibility in dense vegetation
- European made



Low grass





High grass
& weeds



Brambles

FITS ALL BRUSHCUTTERS

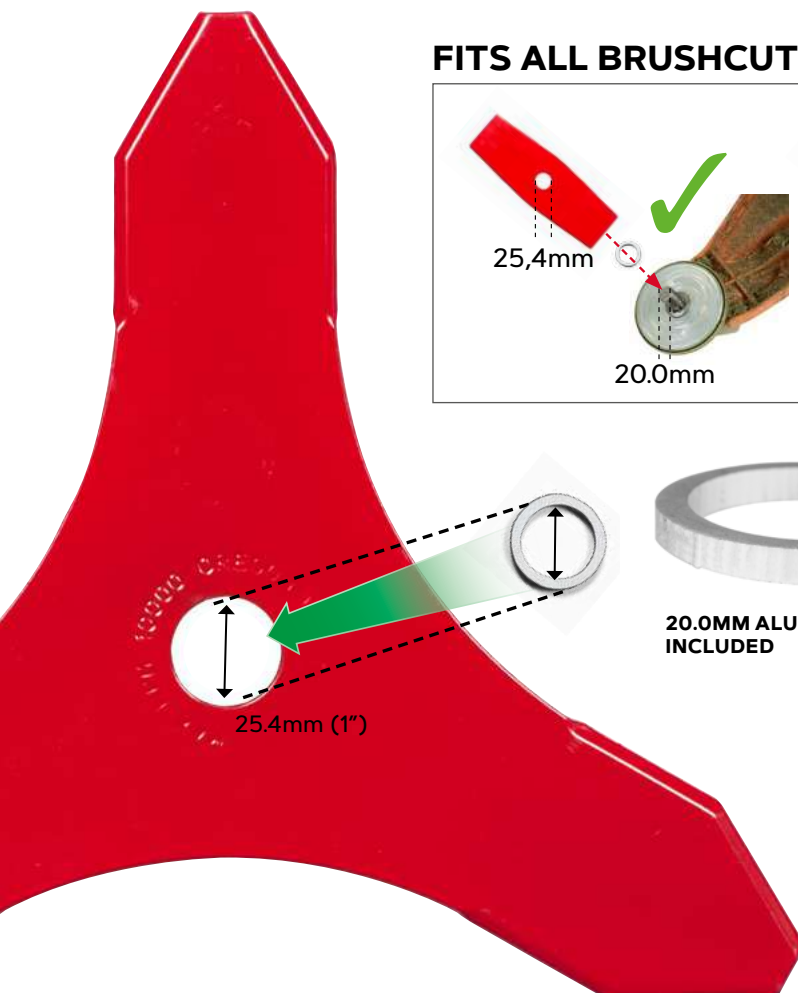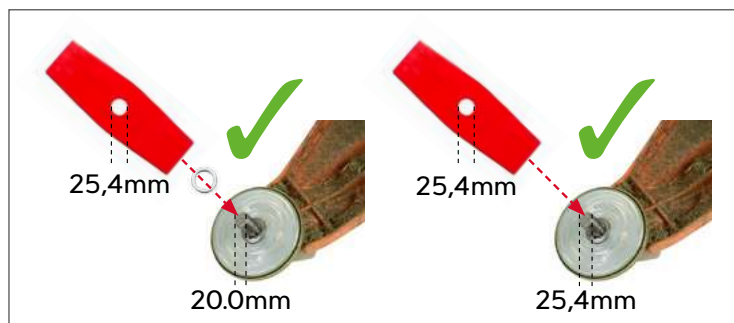

**20.0MM ALUMINIUM ADAPTOR
INCLUDED**

AD301-832EN

BLADE SELECTION SIDE PANEL :
(available in local language upon request)





GRASS CUTTING BLADES - SMALL AREAS




255mm	20.0mm / 25,4mm	2	1,4mm	295491-0	10
-------	-----------------	---	-------	-----------------	----



MOWING BLADES - LARGE AREAS OF SOFT GROWTH



255mm	20.0mm / 25,4mm	3	1,8mm	295493-0	10
255mm	20.0mm / 25,4mm	3	1,4mm	295494-0	10
230mm	20.0mm / 25,4mm	4	1,4mm	295500-0	10
255mm	20.0mm / 25,4mm	4	1,4mm	295501-0	10



MOWING BLADES FOR TOUGHER GROWTH - NETTLES, COARSE GRASS, REEDS, AND MORE



230mm	20.0mm / 25,4mm	8	1,4mm	295502-0	10
255mm	20.0mm / 25,4mm	8	1,4mm	295503-0	10



BRUSHWOOD BLADES : LOW AND DENSE VEGETATION



255mm	20.0mm / 25,4mm	3	3.0mm	295496-0	10
300mm	20.0mm / 25,4mm	3	3.0mm	295497-0	10
350mm	20.0mm / 25,4mm	3	4mm	295498-0	10
300mm	20.0mm / 25,4mm	3	4mm	295499-0	10



SHREDDER BLADES : HIGH AND DENSE VEGETATION



300mm	20.0mm / 25,4mm	2	3.0mm	295504-0	10
300mm	20.0mm / 25,4mm	2	4mm	295505-0	10
300mm	20.0mm / 25,4mm	3	3.0mm	295507-0	10
300mm	20.0mm / 25,4mm	3	4mm	295508-0	10



Brushcutter Blades

- The range includes the most popular shapes or a wide range of applications
- European made
- Unbranded and delivered in bulk
- Competitive price, ideal for:
- Replacement in the workshop
- Professionals who go through several blades every season



Low grass




High grass
& weeds



Brambles



GRASS CUTTING BLADES - SMALL AREAS



255mm	25,4mm	2	1,4mm	559019
300mm	25,4mm	2	1,6mm	559020
300mm	25,4mm	2	2,5mm	P6129300001
350mm	25,4mm	2	1,8mm	P6102350001



MOWING BLADES FOR TOUGHER GROWTH - NETTLES, COARSE GRASS, REEDS, AND MORE



255mm	25,4mm	8	1,8mm	P618825500101
-------	--------	---	-------	----------------------



BRUSHWOOD BLADES : LOW AND DENSE VEGETATION



250mm	25,4mm	3	1,8mm	P6191251001
255mm	20.0mm	3	3.0mm	559023
255mm	25,4mm	3	3.0mm	559024
300mm	20.0mm	3	3.0mm	559025
300mm	25,4mm	3	3.0mm	559026
350mm	20.0mm	3	4.0mm	559027
350mm	25,4mm	3	4.0mm	559028
300mm	20.0mm	3	4.0mm	559029
300mm	25,4mm	3	4.0mm	559030



SHREDDER BLADES : HIGH AND DENSE VEGETATION



270mm	20.0mm	2	4.0mm	P6124270002
270mm	25,4mm	2	4.0mm	P6124270001
315mm	20.0mm	2	4.0mm	P6132315002
315mm	25,4mm	2	4.0mm	P6132315001
205mm	25,4mm	2	2,5mm	P6129205001
250mm	25,4mm	2	2,5mm	P6129250003



Clearing Saw blades

- For use with brushcutters / clearing saws.
- Ideal for thickets and stems up to 20 cm in diameter
- Easy to sharpen with a 7/32" (5,5mm) round file.



					OREGON	SPECIFICATIONS	
	20.0mm	22	1,5mm	110976			
200mm							
	25,4mm	22	1,5mm	110975		• Recommended for 30cc and larger clearing saws • EIA Type	10
	20.0mm	24	1,8mm	110978			
225mm							
	25,4mm	24	1,8mm	110977			
	20.0mm	22	1,5mm	110972			
200mm							
	25,4mm	22	1,5mm	110971		• Recommended for 45cc and larger clearing saws • Maxi Type	10
	20.0mm	24	1,8mm	110974			
225mm							
	25,4mm	24	1,8mm	110973			

OREGON®

75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged. Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents. Engineering is the bedrock of our reputation.



PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS. OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2024 - AD100-011-EN



Discover more of our products at
OregonProducts.com

OREGON®

LAWN MOWER BLADES


LB_1.1
EN/EUR



OREGON®

WHEN OUTSTANDING QUALITY AND INNOVATION COME TOGETHER

Oregon blades are produced in several factories, including the one in Civray, France, under strict quality requirements to ensure market-leading quality, performance, and durability.

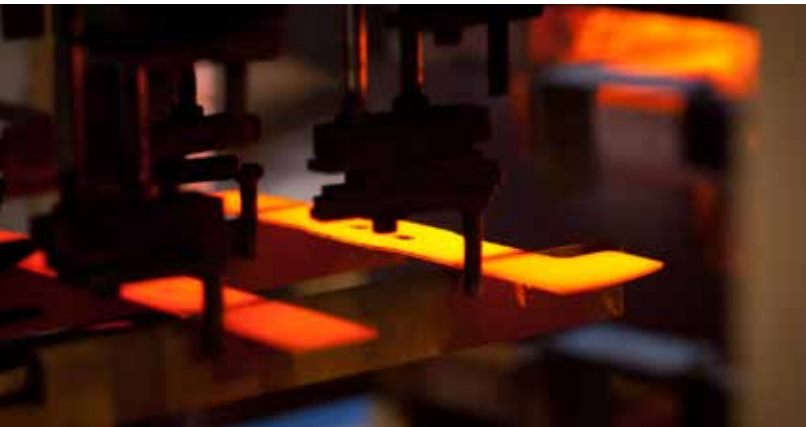

Throughout the blade manufacturing process, 26 key characteristics are checked to ensure our blades deliver the quality you expect from an Oregon blade.

- Balance – We ensure all blades are optimally balanced to ensure superior performance.
- Material Integrity – We consistently check our blades to ensure their material delivers tough, durable and long-lasting performance.
- Sharpness – Each blade meets our rigid standards for sharpness and quality.
- Performance – Extensive product testing ensures every blade performs to the highest level.
- Center-Mounting Hole – Our blades fit with exact OE requirements.
- Traceability – Each and every blade produced by our factory has full traceability back to the mill where the steel was produced.

Oregon Blade
Production plant,
Civray, France.

LAWNMOWER BLADE RANGES



One For All lawnmower blades

- Premium quality blade
- Universal fit: reduced inventory
- 1 blade fits many lawnmowers
- Heavy and medium duty applications
- Mulching, bagging and side discharge



Premium Gator® lawnmower blades

- Premium quality blade
- Heavy duty applications
- Superior mulching, bagging and side discharge
- Less sharpening
- Longer lifetime



OEM replacement lawnmower blades

- High quality blade
- Exact OEM replacement
- Extensive range

GATOR® BLADE THE UNMATCHED STANDARD.


Our innovation leads the industry — the standard all other mulchers are measured against. Often imitated, but never matched. Gator® blades lift and circulate clippings for a finer mulch and a cleaner cut. Period.

With relentless quality control, we guarantee this original lives up to its name, time after time.



Radius-Cut End

All Gator blades feature progressive geometry to maintain maximum cutting length throughout the life of the blade.




High-Lift

The aggressive blade angle increases air flow to push debris up-and-out for superior mulching, bagging or side discharge.




Gator® Mulcher

Blades lift and circulate cuttings for a finer mulch and a cleaner, more efficient cut.



Extended Cutting Length

Up to twice the cutting length optimizes the cutting efficiency with each revolution.



Thicker & Wider Steel Stock

Greater width and thickness extends blade life and allows the high-lift arch to improve bagging and mulching.

G3

Engineered with the core Gator mulching features that make them a great choice for normal and abrasive conditions.

- + **High-Lift**
- + **Gator® Mulcher**

G5

An optimum combination for a wide range of mower units. Features a high-lift contour as well as two additional, premium features to improve performance and retain blade sharpness.

- + **High-Lift**
- + **Gator® Mulcher**
- + **Extended Cutting Length**
- + **Fusion® Technology**

G6


Heavy-duty blades designed for commercial applications and to withstand punishing conditions, while offering the full-range of features that make Gator series blades unique.

- + **High-Lift**
- + **Gator® Mulcher**
- + **Extended Cutting Length**
- + **Fusion® Technology**
- + **Thicker & Wider Steel Stock**

STAY SHARP LONGER

Fusion® Technology

Tungsten carbide is fused into our G5 and G6 blades during the manufacturing process – creating an ultra-hard layer at the cutting edge and increasing the time between sharpenings.

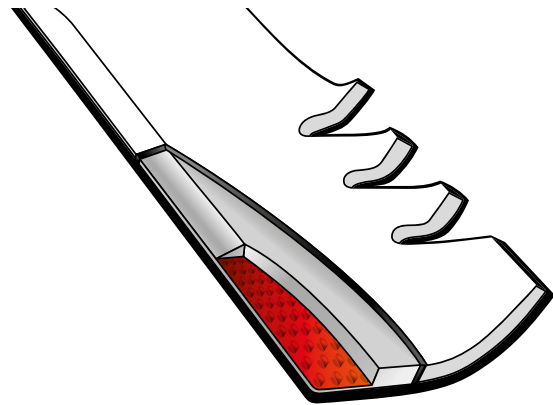

ONE BLADE FITS ALL



- Premium quality blade
- Universal fit: reduced inventory
- 1 blade fits many lawnmowers
- Heavy and medium duty applications
- Mulching, bagging and side discharge



ONE-FOR-ALL UNIVERSAL LAWN MOWER BLADES RETAIL PACK

INCHES



CM

OREGON



GATOR® MULCHER STRAIGHT BLADES



	16"	40cm	69-239-0	6
	17"	42.5cm	69-241-0	6
	18"	45.1cm	69-242-0	6
	19"	47.6cm	69-243-0	6
	20"	50.2cm	69-244-0	6
	21"	52.7cm	69-245-0	6
	22"	55.2cm	69-246-0	6



GATOR® MULCHER FORMED BLADES



	18"	45.1cm	69-263-0	6
	19"	47.6cm	69-264-0	6
	20"	50.2cm	69-265-0	6
	21"	52.7cm	69-266-0	6
	22"	55.2cm	69-267-0	6

ONE-FOR-ALL UNIVERSAL LAWN MOWER BLADES RETAIL PACK

INCHES



CM

OREGON



STRAIGHT BLADES

ONE FOR ALL

	15"	37.5cm	69-247-0	6
	16"	40cm	69-248-0	6
	17"	42.5cm	69-249-0	6
	18"	45.1cm	69-258-0	6
	19"	47.6cm	69-259-0	6
	20"	50.2cm	69-260-0	6
	21"	52.7cm	69-261-0	6
	22"	55.2cm	69-262-0	6



FORMED BLADES

ONE FOR ALL

	15"	37.5cm	69-250-0	6
	16"	40cm	69-251-0	6
	17"	42.5cm	69-252-0	6
	18"	45.1cm	69-253-0	6
	19"	47.6cm	69-254-0	6
	20"	50.2cm	69-255-0	6
	21"	52.7cm	69-256-0	6
	22"	55.2cm	69-257-0	6



DETHATCHER BLADES

ONE FOR ALL

	16"	40cm	690-617-0	3
	18"	45.1cm	690-618-0	3
	20"	50.2cm	690-521-0	3



HI-LIFT BLADES

ONE FOR ALL

	16"	40cm	69-269-0	6
	17"	42.5cm	69-270-0	6
	18"	45.1cm	69-271-0	6
	19"	47.6cm	69-272-0	6
	20"	50.2cm	69-273-0	6
	21"	52.7cm	69-274-0	6
	22"	55.2cm	69-275-0	6

ADAPTORS SET OF 7

ONE FOR ALL

	10mm, ½" (12.7mm), 14mm, 16mm, 18mm, 19.5mm, 21mm		02-035	1
---	---	--	--------	---

DETHATCHER SPRINGS 10-PACK

ONE FOR ALL

	10mm, ½" (12.7mm), 14mm, 16mm, 18mm, 19.5mm, 21mm		89-801	1
---	---	--	--------	---

ONE-FOR-ALL OEM CROSS REFERENCES

									
									
ALKO									
Classic 40E, 40B, Comfort 40E	513519	38,5	19,7	9	65	1	-	69-247-0	
Classic 42 plus	531486	39,5	19,0	9,0	65	1	-	69-247-0	
Comfort 420 BIO-COMBI	460983	40	19	8x12	65	1	-	69-239-0	
Sigma 460, Goldenline 460, Orion 460, 47 Classic 46E, 46B, BR, BRE	343120	46	19,5	9	65	1	69-242-0	69-258-0	
Sigma 460, Goldenline 460, Orion 460, 47 Classic 46E, 46B, BR, BRE	513520	46	19,5	9	65	1	69-242-0	69-258-0	
Sigma 460, Goldenline 460, Orion 460, 47 Classic 46E, 46B, BR, BRE	513621	46	19,5	9	65	1	69-242-0	69-258-0	
Sigma 460, Goldenline 460, Orion 460, 47 Classic 46E, 46B, BR, BRE	530979	46	19,5	9	65	1	69-242-0	69-258-0	
Premium 6000	531736	46	19,5	-	-	1	69-263-0	69-253-0	
	405499	46,5	19	8	65	1	69-242-0	69-258-0	
	313931	47,5	19	12,7x20	70	1	69-243-0	69-259-0	
Aero Kreil 48CM	328531	47,8	19,7	12,7x20	70	1	69-243-0	69-259-0	
30/485/48B5/4800B5	300130	48,5	10	-	-	1	69-264-0	69-254-0	
ANTONIO CARRARO									
Rondo 1500 (60", 155CM)	59006200	51,4	19	-	-	3	69-265-0	69-255-0	
ARIENS									
GT Tractor (38", 96CM)	31237	42	19	-	-	2	-	69-252-0	
GT Tractor (48", 122CM)	30278	42,1	19	-	-	3	-	69-252-0	
ZTR (50", 127CM)	8779200	43	19	-	-	3	-	69-252-0	
AS-MOTOR									
Mulchmeister 102	6415	44,1	20,3	6,8	47	1	69-241-0	69-249-0	
Mulchmeister 84	5757	54,2	20,3	-	-	1	69-246-0	69-262-0	
BERNARD									
BM102, BM104	12800	42	8,5	-	-	1	69-239-0	69-248-0	
BOBCAT									
82CM, 122CM	WM132061	41,2	15,8	-	-	2-3	69-239-0	-	
92CM, 137CM	32022HD	45,7	15,8	6,3	41,2	2-3	69-242-0	69-258-0	
36", 92CM	BAN2111PB	45,7	15,8	-	-	3	69-263-0	69-253-0	
XM series (92CM, 137CM)	32022A	45,7	15,8	-	-	2-3	69-242-0	69-258-0	
BOLENS									
30048S, 30048E, 18336, 19211 (48", 122CM)	173-0412	43,1	9,5	9,5	69,8	3	69-241-0	69-249-0	
30048S, 30048E, 18336, 19211 (48", 122CM)	173-2145	43,1	9,5	9,5	69,8	3	69-241-0	69-249-0	
30048S, 30048E, 18336, 19211 (48", 122CM)	173-8571	43,1	9,5	9,5	69,8	3	69-241-0	69-249-0	
300365, 310365 (36", 92CM)	174-7640	47	17,7	-	-	2	69-242-0	69-258-0	
300365, 310365 (36", 92CM)	177-2335	47	17,7	-	-	2	69-242-0	69-258-0	
21", 53CM	176-4381	53	12,7	9,5	63,5	1	69-266-0	-	
21", 53CM	310-1220	53	12,7	9,5	63,5	1	69-266-0	-	
22", 56CM	189-3850	55,2	12,7	9,9	63,50	1	69-267-0	69-257-0	

										
BUNTON										
81CM, 122CM	PC1255	40,6	15,8	-	-	2-3	69-239-0	69-248-0		
81CM, 122CM	A48110	41,9	15,8	-	-	2-3	69-241-0	69-249-0		
81CM, 122CM	PL4205	41,9	15,9	-	-	2-3	69-241-0	-		
Model 38, 39 & 41 (82CM, 122CM)	PL4855	41,9	15,9	-	-	2-3	69-241-0	-		
Model 38, 39 & 41 (82CM, 122CM)	PL4055	41,9	15,9	-	-	2-3	-	69-252-0		
92CM, 132CM	PL4206	45,7	15,9	-	-	2-3	69-242-0	69-258-0		
61", 152CM	PC005	53,1	15,9	-	-	3	69-245-0	69-261-0		
61", 152CM	A48111	53,3	15,8	-	-	3	69-245-0	-		
60", 152CM	PC005	53,3	15,8	-	-	3	69-245-0	-		
CARONI										
TC590N (60", 155CM)	59006200	51,4	19	-	-	1	69-265-0	69-255-0		
CASTELGARDEN										
New Garda 410, 414	81004233/0	39	18	8,5	65	1	-	69-248-0		
New Garda 410, 414	81004233/2	39	18	8,5	65	1	-	69-248-0		
New Garda 410, 414	81004360/1	39	18	8,5	65	1	-	69-248-0		
New Garda 410, 414	81004360/2	39	18	8,5	65	1	-	69-248-0		
New Garda 410, 414	81004360/3	39	18	8,5	65	1	-	69-248-0		
430, 480	81004396	40,8	18	8,8	65	1	69-239-0	69-248-0		
RASER 43. 430 + 480 models with 40CM cut	81004341/0	41	18	8,8	65	1	69-239-0	69-248-0		
RASER 43. 430 + 480 models with 40CM cut	81004396/0	41	18	8,8	65	1	69-239-0	69-248-0		
	81004365/3	43,5	18	8,8	65	1	-	69-252-0		
460 MULCHING	81004365	43,5	18	8,8	65	1	69-241-0	-		
460 series	81004232/1	44,0	18	8,8	65	1	69-241-0	69-249-0		
S474L, G45	81004385	44,9	18	8,8	65	1	69-242-0	69-258-0		
430, 480 series	81004346/2	45,7	18	8,8	65	1	69-263-0	69-253-0		
430, 480 series	81004397/0	45,7	18	8,8	65	1	69-263-0	69-253-0		
T430,T434,T480,T484, MULCHING TC92	81004346	46	18	8,8	65	1	69-263-0	69-253-0		
T430,T434,T480,T484, MULCHING TC92	81004346/0	46	18	8,8	65	1	69-263-0	69-253-0		
T430,T434,T480,T484, MULCHING TC92	81004346/1	46	18	8,8	65	1	69-263-0	69-253-0		
T430,T434,T480,T484, MULCHING TC92	81004346/2	46	18	8,8	65	1	69-263-0	69-253-0		
500 series	81004366/0	48	18	8,8	65	1	69-264-0	69-254-0		
500 series	81004370/0	48	18	8,8	65	1	69-264-0	69-254-0		
500 series	81004395/0	48	18	8,8	65	1	69-264-0	69-254-0		
500 series	81004395/1	48	18	8,8	65	1	69-264-0	69-254-0		
474TT,N504	81004366	48	18	8,8	65	1	69-243-0	69-254-0		
474TT, NG504, NG504TR, TRE	81004366/2	48	18	8,8	65	1	69-243-0	69-254-0		
	81004126/0	50	18	8,8	65	1	69-243-0	69-259-0		
530	81004381	50,6	18	8,5	65	1	69-244-0	69-260-0		
530, Variolux 53BCAH	81004381/0	50,6	18	8,5	65	1	69-244-0	69-260-0		
RL534	81004398	51	18	8,7	65	1	69-265-0	69-255-0		

 										
CUB CADET										
44" (117CM)	742-3002	38,4	19	-	-	3	-	69-250-0		
48" (122CM)	742-3019	41,9	19	7,9	63,50	3	69-241-0	69-249-0		
50" (127CM)	742-3003	43,6	19	-	-	3	-	69-252-0		
3160-A	117453-C1	52,4	19	-	-	1	69-266-0	69-256-0		
42", 107CM	742-3018	53,5	19	7,9	63,50	2	69-245-0	69-261-0		
DIXON										
50", 127CM	9433	43,1	17,4	-	-	3	69-241-0	-		
50", 127CM	9444	43,1	17,7	-	-	3	69-241-0	69-249-0		
42", 107CM	13920	43,1	17,7	-	-	3	-	69-247-0		
Model 502 & 503 (127CM)	9258	43,2	15,8	-	-	3	69-241-0	69-249-0		
Model 502 & 503 (127CM)	9265	43,2	15,8	-	-	3	69-241-0	69-249-0		
92CM	1893	47	17,7	-	-	2	69-242-0	69-258-0		
92CM	1324	47	17,7	-	-	2	69-242-0	69-258-0		
92CM	6895	47	17,7	-	-	2	69-242-0	-		
152CM	6898	52	17,7	-	-	3	69-245-0	-		
8025 (152CM)	12441	52,1	15,8	-	-	3	69-245-0	69-261-0		
8025 (152CM)	18931	52,1	15,8	-	-	3	69-245-0	69-261-0		
60", 152CM	18931	52,1	15,8	-	-	3	69-245-0	-		
DOLMAR										
PM48, PM48S, EM4816	664531048	45,7	18	8,8	65	1	69-263-0	69-253-0		
EFCO										
LR43PB	66010038	39	10	8	65	1	-	69-247-0		
LR43PE	66010047	39	21	10,5	52	1	-	69-247-0		
LR44PB	-	40,5	10	8	65	1	69-239-0	69-248-0		
LR47PE	66010017	45,5	21	10,5	52	1	69-242-0	69-258-0		
LR47PB	66030201	45,5	10	7,9	65	1	69-242-0	69-258-0		
G53TX	66070034	51	10	8	65	1	69-244-0	69-260-0		
E-FLOR										
	531-0050-09	43,7	10	-	-	1	69-241-0	-		
460 series	81004232/1	44	18	8,8	65	1	69-239-0	-		
MULTICLIP 46S/PRO 46	1111-1530-01	46	10	8	55	1	69-242-0	-		
MULTICLIP 46S/PRO 46	1111-1603-01	46	10	8	55	1	69-242-0	-		
MULTICLIP 46S/PRO 46	1111-9077-01	46	10	8	55	1	69-242-0	-		
MULTICLIP 46S/PRO 46	1111-9078-01	46	10	8	55	1	69-242-0	-		
36", 92CM	4943	46	10	8	50	2	69-242-0	69-258-0		
TMG18 (54", 137CM)	8657306-001-00	47,5	14,0	-	-	3	69-264-0	69-254-0		
EXCEL/HULSTER										
Model 2500 (60", 152CM)	76752	53,2	12,7	-	-	3	69-266-0	69-256-0		
EXMARK										

 										
44",112CM	653102	38,7	16	-	-	3	69-250-0	69-247-0		
48", 122CM	403059	41,2	15,8	-	-	3	69-239-0	69-248-0		
52", 132CM	603873	45,7	12,7	-	-	3	69-242-0	-		
92CM, 132CM	303283	45,7	15,8	-	-	2-3	69-242-0	69-258-0		
92CM, 132CM	303495	45,7	15,8	-	-	2-3	69-263-0	-		
60", 152CM	603874	52	12,7	-	-	3	69-265-0	-		
Turf Tracer (60", 152CM)	603283	52	12,7	-	-	3	-	69-255-0		
60", 152CM	633483	52,1	15,8	-	-	3	69-245-0	-		
FLANDRIA										
Rekord	490005	43,5	10	10,5	52	1	69-241-0	69-249-0		
GRANJA										
GT14CP	M2868	37,9	16	6,5	70	1	-	69-250-0		
Laser, Mascot, Mercury 16", Omega, Delta, Optima, Mascot 42, Mascot 420P	B021300/0	41,9	16	7,9	65	1	-	69-251-0		
GT346/ 347/352/353	1206	45,8	10	-	-	1	69-263-0	69-253-0		
	M1336	46	16	7	70	1	69-263-0	69-253-0		
	M4358	46	16	7	70	1	69-263-0	69-253-0		
	041300/0	46	16	8	65	1	69-263-0	69-253-0		
MS748	90892048	48	10	-	-	1	69-264-0	69-254-0		
5160BR, 51606BRT, 5160BRM	90895105	51,2	10	8,3	65	1	69-265-0	-		
MS753	90892047	52,0	10	7,9	65	1	69-261-0	69-245-0		
GRASSHOPPER										
52", 132CM	320236	45,7	12,7	-	-	3	69-263-0	69-253-0		
61", 155CM	320242	53,3	12,7	-	-	3	69-266-0	69-256-0		
GRAVELY										
PRO 50 (127CM)	11234P1	43,1	15,8	-	-	3	69-241-0	69-249-0		
Model 502 & 503 (127CM)	46998	43,2	15,8	-	-	3	69-241-0	-		
Pro Master 100ZTR (127CM)	46998	43,2	15,8	-	-	1	69-241-0	69-249-0		
36", 92CM	38883	44,9	15,8	-	-	2	69-242-0	-		
36", 92CM	42124	44,9	15,8	-	-	2	69-242-0	-		
102CM, 152CM	25124	52	15,8	-	-	2-3	-	69-261-0		
60", 155CM	48864	52	15,8	-	-	3	69-245-0	69-255-0		
60", 152CM	46999	52,1	15,8	-	-	3	69-245-0	69-255-0		
GUTBROD										
Golf 248 S4	-	45	15,8	7,9	65	1	69-242-0	69-258-0		
HARRY										
16", 41CM	302-40-803	47,5	15,8	10	70	1	69-263-0	-		
22", 56CM	423-40-803	55	15,8	10	70	1	69-267-0	-		
HAYTER										

												
Hobby Petrol	201026	40,6	15,8	-	-	1	69-239-0	69-248-0				
Hunter 45	320019	45,5	15,8	-	-	1	69-242-0	69-258-0				
Harrier, Kestrel 48	4013	48	15,8	-	-	1	69-243-0	69-259-0				
Harrier, Kestrel 48 (old)	40130	48,2	15,8	-	-	1	69-243-0	69-259-0				
HUNTER 54	330032	53	16	-	-	1	69-245-0	69-261-0				
HONDA												
Pan-European E 410, HRE 410, HRG 410/413	CG81004396H0	40,8	18	8,8	65	1	69-239-0	-				
SW429, SW429 Z, SW4642	81004396/0	41	18	8,8	65	1	69-239-0	69-248-0				
SW429, SW429 Z, SW4642	81004341/0	41	18	8,8	65	1	69-239-0	69-248-0				
HRE410, HRG410/413	8100-43-960	41	18	8,8	65	1	69-239-0	69-248-0				
Pan-European HRF464S, HRG465C, HRF465PS, HRG465	8100-43-970	45,7	18	8,8	65	1	69-263-0	69-253-0				
S4650Q, QA, QAE, SW439, A, AE, Z, SW4648, A, AE, JU 2135, H, CM7114 H, CM 7124 H	81004346/2	45,7	18	8,8	65	1	69-263-0	69-253-0				
S4650Q, QA, QAE, SW439, A, AE, Z, SW4648, A, AE, JU 2135, H, CM7114 H, CM 7124 H	81004397/0	45,7	18	8,8	65	1	69-263-0	69-253-0				
HF2113	8100-43-463	46,2	18	8,5	65	1	69-263-0	69-253-0				
SW432 A, SW432 A3, SW432, AE3, SW4753 A, SW4753 A3	81004398/0	50,5	18	8,8	65	1	69-265-0	69-255-0				
HURRICANE												
NG464	81004365/1	43,5	18	8,8	65	1	-	69-252-0				
HUSQVARNA/AYP												
970-12 (97CM)	539-1032-74	38	16	-	-	3	-	69-247-0				
Pro-Flex, R1200 (47", 120CM)	506-8852-01	43,7	10	-	-	3	69-241-0	-				
Pro-Flex, R1200 (47", 120CM)	531-0050-09	43,7	10	-	-	3	69-241-0	-				
BioClip Mulcher, Team Partner ABS	516 44 38-00	46	10	8,5	65	1	69-263-0	-				
BioClip Mulcher, Team Partner ABS	5310050-40	46	10	8,5	65	1	69-263-0	-				
36", 92CM	71285	46,1	9,5	-	-	2	69-242-0	69-258-0				
36", 92CM	75270	46,1	9,5	-	-	2	69-242-0	69-258-0				
36", 92CM	98111	46,1	9,5	-	-	2	69-242-0	69-258-0				
36", 92CM	25645R	46,1	9,5	-	-	2	69-242-0	69-258-0				
Partner 890, 1090, 1290 (36", 92CM)	121263	46,2	9,5	-	-	2	69-242-0	69-258-0				
Partner 890, 1090, 1290 (36", 92CM)	120262X	46,2	9,5	-	-	2	69-242-0	69-258-0				
Partner 890, 1090, 1290 (36", 92CM)	126338X	46,2	9,5	-	-	2	69-242-0	69-258-0				
92CM, 36"	5321263-38	46,2	9,5	-	-	2	69-242-0	69-258-0				
36", 92CM	5321222-60	46,2	9,5	-	-	2	69-242-0	69-258-0				
Bioclip, Team Partner 246D	5164005-00	46,5	10	8,5	65	1	69-263-0	69-253-0				
38", 96.5CM	123461X	49	9,5	-	-	2	69-243-0	-				
38", 96.5CM	142978X	49	9,5	-	-	2	69-243-0	-				
38", 96.5CM	106634X	49,2	9,5	-	-	2	69-243-0	69-259-0				
38", 96.5CM	25036R	49,2	9,5	-	-	2	69-243-0	69-259-0				
38", 96.5CM	121263X	49,2	9,5	-	-	2	69-243-0	69-259-0				
LT960/YTH125	5321212-63	49,2	9,5	-	-	1	69-243-0	69-259-0				
BIOCLIP, Husqvarna Master, Master Pro	516-4139-00	50	9,9	8,7	-	1	69-244-0	-				
BIOCLIP, Husqvarna Master, Master Pro	531-0050-45	50	9,9	8,7	-	1	69-244-0	-				

 									
Jet50, 51		850972	50,5	15,8	9,5	47,6	1	69-244-0	69-260-0
Jet 50-51		532-8509-72	50,6	15,8	9,5	47,6	1	69-265-0	-
20", WALK BEHIND		25744	50,6	15,8	9,5	47,6	1	69-244-0	-
Jet 50-51		129277	50,8	15,8	9,5	47,6	1	69-265-0	-
Jet 50-51		131694	50,8	15,8	9,5	47,6	1	69-265-0	-
Jet 50-51		133346	50,8	15,8	9,5	47,6	1	69-265-0	-
Jet 50-51		145106	50,8	15,8	9,5	47,6	1	69-265-0	-
Jet 50-51		532145106	50,8	15,8	9,5	47,6	1	69-265-0	-
Jet 50-51		532752233	50,8	15,8	9,5	47,6	1	69-265-0	-
ROYAL 53		516-4943-04	53	9,9	-	-	1	69-266-0	69-256-0
42", 106CM		101733	53	16	-	-	2	69-266-0	69-256-0
R52SE, P5553, 4553, 753, 553		532 1750-52	53,2	16	9,5	48	1	69-245-0	69-261-0
53CM		159267	53,5	16	10	48	1	69-245-0	69-261-0
53CM		199377	53,5	15,8	9,5	47,5	1	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)		165833	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)		175064	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)		189028	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)		406712	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)		532-1658-33	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)		532-1750-64	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)		532-1890-28	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)		532-4067-12	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)		539-1118-78	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
22", WALK BEHIND		532-3552-56	55,2	15,8	9,5	47,6	1	69-246-0	
22", WALK BEHIND		532-7522-34	55,2	15,8	9,5	47,6	1	69-246-0	
Jet 55		850973	55,2	15,8	9,5	47,6	1	69-267-0	-
FR6852SH-9612400J		406713	55,2	15,8	9,6	47,6	1	69-246-0	69-262-0
FR6852SH-9612400J		192682	55,2	15,8	9,6	47,6	1	69-246-0	69-262-0
Jet55 (56CM)		141114	55,2	15,8	9,6	47,6	1	69-246-0	
Jet55 (56CM)		532-1411-14	55,2	15,8	9,6	47,6	1	69-246-0	69-262-0
Jet55 (56CM)		532-8509-73	55,2	15,8	9,5	47,6	1	69-246-0	69-262-0
ISEKI									
SG153, SG173 (122CM)		8595306-002-00	42,8	14,5	-	-	3	-	69-252-0
TMG18 (137CM)		8657306-001-00	47,5	14	-	-	3	69-264-0	69-254-0
SF200, SF230 (137CM)		8654306-001-00	52,5	15,8	-	-	3	69-266-0	69-256-0
JACOBSEN									
92CM, 132CM		390655	45,7	15,8	-	-	2-3	69-242-0	69-258-0
JOHN DEERE									

 										
48", 122CM	AM104488	40,6	15,8	-	-	3	69-239-0	69-248-0		
PT11136 (81CM, 122CM)	PC1255	40,6	15,8	-	-	2-3	69-239-0	69-248-0		
46-47-48 (46", 117CM)	AM31100	40,6	17,5	-	-	3	69-239-0	69-248-0		
46-47-48 (46", 117CM)	M41967	40,6	17,5	-	-	2	69-239-0	69-248-0		
46-47-48 (46", 117CM)	M41967	40,6	17,5	-	-	2	69-239-0	69-248-0		
Model 38, 39 & 41 (82CM, 122CM)	AM104489	40,6	17,5	-	-	2-3	69-239-0	69-248-0		
100 SERIES-L (48", 122CM)	GX20250	43	17	10,3	85	3	69-241-0	69-249-0		
50", 127CM	AM39966	43,6	17,6	-	-	3	69-241-0	69-249-0		
92CM, 132CM	PT8721	45,7	15,8	-	-	2-3	69-243-0	69-259-0		
38", 96.5CM	M112991	49,5	17,8	-	-	2	69-243-0	-		
38", 96.5CM	AM10094	49,5	17,8	-	-	2	69-243-0	-		
38", 96.5CM	M82408	49,5	17,8	-	-	2	69-264-0	69-254-0		
38", 96.5CM	AM100946	49,5	17,8	-	-	2	69-264-0	69-254-0		
38", 96.5CM	M84472	49,5	17,8	-	-	2	69-264-0	69-254-0		
Model 400 (153CM)	AM112847	51,9	19,8	-	-	2	69-244-0	69-260-0		
Model 400 (153CM)	AM35557	51,9	19,8	-	-	2	69-244-0	69-260-0		
Model 400 (153CM)	M48452	51,9	19,8	-	-	2	69-244-0	69-260-0		
62C Convertible (62", 158CM)	M1435	54	20,5	-	-	3	69-267-0	-		
LT-166 (106CM)	M139802	54,6	17,4	-	-	2	69-267-0	69-257-0		
LT-166 (106CM)	M145969	54,6	17,4	-	-	2	69-267-0	69-257-0		
JONSERED										
LR8 (36", 92CM)	5320256-45	46,2	9,5	-	-	2	69-242-0	69-258-0		
LR8 (36", 92CM)	532-126338	46,2	9,5	-	-	2	69-242-0	69-258-0		
LR10/12/13/LT14/YTH16 (96.5CM)	532121263	49	9,5	-	-	2	69-243-0	-		
LR10/12/13/LT14/YTH16	532143978	49,2	9,5	-	-	2	69-243-0	-		
600S, 600R, 450	850972	50,5	15,8	9,5	47,6	1	69-244-0	69-260-0		
600S, 600R, 450	532145106	50,8	15,8	9,5	47,6	1	69-244-0	69-260-0		
455SD	532-8509-73	55,2	15,8	9,5	47,6	1	69-266-0	69-256-0		
KLIPPO										
19" (18.5cm) Excellent, Kommun, Pro 4	60.00-4	48,7	14	-	-	1	69-264-0	-		
Combi G7 21", G7 21"	60,04	52,8	14	-	-	1	69-266-0	-		
Cornet, Pro S, Pro SDH, G7	60.04-4	53	14	-	-	1	69-245-0	-		
KUBOTA										
RC48G (48", 122CM)	76500-34330	42,3	18	-	-	3	-	69-249-0		
RC48-F19,RC48-G20F, RC48-C20F (48", 122CM)	76505-11550	42,3	18	-	-	3	-	69-252-0		
U304H, U304M15, 348's (122CM)	70080-00450	42,5	15,9	-	-	3	-	69-252-0		
T1400	66071-61760	52	17,4	-	-	1	69-265-0	69-255-0		
KYNAST										
3r/1601/SIM48	00.1851.33	47	10	10	70	1	69-263-0	69-253-0		
3r/1601/SIM48	3R/1601/SIM48	47	10	10	70	1	69-263-0	69-253-0		
MAC ALLISTER										

 									
		9265	43,2	15,8	-	-	3	69-241-0	69-249-0
MC CULLOCH									
		176-4381	53	12,7	9,5	63,5	1	69-266-0	69-256-0
MOUNTFIELD									
EMBLEM	M2868	37,9	16	6,5	70	1	-	69-250-0	
Empress	M3204	40	16	6,5	70	1	-	69-248-0	
Empress	M4609	40,5	16	7	70	1	69-239-0	69-251-0	
Laser, Mascot, Mercury 16", Omega, Delta, Optima, Mascot 42, Mascot 420P	B021300/0	41,9	16	7,9	65	1	-	69-251-0	
M3 M4	M1336	46	16	7	70	1	69-263-0	69-253-0	
M3 M4	M4358	46	16	7	70	1	69-263-0	69-253-0	
46 CM	M5320	46	16	8	65	1	69-263-0	69-253-0	
Tuffcut 48	MS1173603	48	16,2	-	-	1	69-243-0	69-259-0	
OMEGA 53/DELTA 53	90895105	51	10	8	65	1	69-265-0	69-255-0	
MTD									
38", 83CM	742-04154	45,4	17,5x25,4	-	-	2	69-263-0	-	
46SP, 465P, 9915PN	742-0638	45,5	17,5x25,4	7,9	65	1	69-242-0	69-258-0	
46SP, 465P, 9915PN	742-0818	45,5	17,5x25,4	7,9	65	1	69-242-0	69-258-0	
18", 46CM	742-0738	45,7	17,5x25,4	7,5	63,5	1	69-263-0	-	
18", 46CM	942-0738	45,7	17,5x25,4	7,5	63,5	1	69-263-0	-	
36", 92CM	742-0496	46,4	10,3	7,9	63,5	2	69-242-0	69-258-0	
GE48, 48PT	742-0822	47,5	17,5x25,4	7,9	63,5	1	69-243-0	69-259-0	
MTD Super King 48, 48HM, 48BH	328531	47,8	19,7	12,7x20	70	1	69-243-0	69-259-0	
476, 487, 490, 493, 494, 495, 496, 497, 497F, 497P, 498, 628, 720, 760, 765, S/D, 138-495A, 138-497A, W7-BG-497B	742-0122	48,2	10,3	7,9	63,5	1	69-264-0	69-254-0	
20", 51CM 1997->	742-0640	50,7	17,5x25,4	7,5	63,5	1	69-265-0	69-255-0	
20", 51CM 1997->	942-0640	50,7	17,5x25,4	7,5	63,5	1	69-265-0	69-255-0	
20", 51CM 1997->	942-0740	50,7	17,5x25,4	7,5	63,5	1	69-265-0	-	
20", 51CM 1997->	742-0740	50,7	17,5x25,4	7,5	63,5	1	69-265-0	69-255-0	
	742-0123	50,8	10,3	7,9	63,5	1	69-265-0	69-255-0	
GES53, RB53, 53SP, HB53RB, RB53-5R, CPG53, BL5350SP, 478SPS, YM6021M	742-0828	51,5	17,5x25,4	-	-	1	69-244-0	69-260-0	
GES53, RB53, 53SP, HB53RB, RB53-5R, CPG53, BL5350SP, 478SPS, YM6021M	942-0828	51,5	17,5x25,4	-	-	1	69-244-0	69-260-0	
118-620A, W7-BG620-B, 128-290, W7-BG-290 SP-B	742-0124	53,3	10,3	7,9	63,5	1	69-266-0	69-256-0	
21", 53CM 1997->	742-0641	53,3	17,5x25,4	7,9	63,5	1	69-266-0	69-256-0	
21", 53CM 1997->	942-0641	53,3	17,5x25,4	7,9	63,5	1	69-266-0	69-256-0	
42", 107CM	742-0503	53,8	10,3	7,9	63,5	2	69-266-0	69-256-0	
42", 107CM	742-0538	53,8	10,3	7,9	63,5	2	69-245-0	-	
MURRAY									

									
									
									
									
20", 51CM	20045	50	10	-	-	1	69-243-0	69-259-0	
20", 51CM	42785HT	50	10	-	-	1	69-243-0	69-259-0	
20", 51CM	42785E701	50	10	-	-	1	69-265-0	-	
20", 51CM	672763E701	50,5	10	-	-	1	69-265-0	69-255-0	
21", 53CM	672029	52,4	10	-	-	1	69-244-0	69-260-0	
22", 56CM	672573	55	10	-	-	1	69-246-0	69-262-0	
22", 56CM	672573E701	55	10	-	-	1	69-246-0	69-257-0	
22", 56CM 1968->1990	20046	55,2	10,3	-	-	1	69-267-0	69-257-0	
22", 56CM 1968->1990	422225	55,2	10,3	-	-	1	69-267-0	69-257-0	
OLEO MAC									
G43	66010038	39	10	8	65	1	-	69-247-0	
GE43	66010047	39	21	10,5	52	1	-	69-247-0	
G44	-	40,5	10	8	65	1	69-239-0	69-248-0	
G47 X/A/TAS	66030201	45,5	10	7,9	65	1	69-242-0	69-258-0	
GE47	66010017	45,5	21	10,5	52	1	69-242-0	69-258-0	
G53	66070034	51	10	8	65	1	69-244-0	69-260-0	
PARTNER									
150, 150H, 150D	850972	50,5	15,8	9,5	47,6	1	69-244-0	69-260-0	
1295 (96.5CM)	5321212-63	49	9,5	-	-	2	69-243-0	-	
50-51	5328509-72	50,6	15,8	9,5	47,6	1	69-265-0	-	
155LD,355D	532-8509-73	55,2	15,8	9,5	47,6	1	69-266-0	69-256-0	
Jet 55	850973	55,2	15,8	9,5	47,6	1	69-267-0	-	
PILOTE									
Groundsmaster (92CM, 132CM)	27-0990	45,7	12,7	-	-	2-3	69-263-0	69-253-0	
534TR	81004398/0	50,5	18	8,8	65	1	69-265-0	69-255-0	
PLANTIFLOR									
NG484	81004395/1	48	18	8,8	65	1	69-264-0	-	
QUEEN GARDEN									
	344020	44,1	17,4	10	52	1	69-241-0	69-249-0	
B484 TR-H	81004346/3	46,2	18	8,5	65	1	69-263-0	69-253-0	
	206	49	18	-	-	1	69-243-0	69-259-0	
GI 52	55013	51	10	8	65	1	69-244-0	69-260-0	
RANSOMES									

 										
92CM, 137CM	32022	45,7	15,8	6,3	41,2	2-3	69-242-0	-		
82CM, 122CM	92418	41,2	15,8	-	-	2-3	69-239-0	-		
XM SERIES 92CM, 137CM	112111-02	45,7	15,8	-	-	2-3	69-263-0	69-253-0		
92CM, 137CM	32022HD	45,7	15,8	6,3	41,2	2-3	69-242-0	69-258-0		
21", 53CM	72039	53,3	9,5	9,5	50,8	1	69-266-0	69-245-0		
21", 53CM	WM172039	53,3	9,5	9,5	50,8	1	69-266-0	69-245-0		
61" (155CM)	421808	53,3	15,8	-	-	3	69-245-0	69-261-0		
HA6010, HT3806, 851 (155CM)	112111-03	53,3	15,8	-	-	3	69-266-0	69-256-0		
HA6010, HT3806, 851 (155CM)	112243-03	53,3	15,8	-	-	3	69-266-0	69-256-0		
SABO										
Serie 120, 140, 200, 300 116, 116H, 170, 175, 180, 185, 240, 245, 260, 265, 285, 320, LT166, STX46, F510, F525	AM31100	40,6	17,5	-	-	2	69-239-0	69-248-0		
TC92	SB81004346/3	46,2	18	8,5	65	1	69-263-0	69-253-0		
SABRE										
48"-1948GV, 1948HV, 2148HV	AM39966	43,6	17,6	-	-	3	69-241-0	-		
SANDRIGARDEN										
	206	49	18	-	-	1	69-243-0	69-259-0		
GI52	53013	51	10	8	65	1	69-244-0	69-260-0		
SCAG										
82CM, 122CM	A48110	41,9	15,8	-	-	2-3	69-241-0	69-249-0		
82CM, 122CM	A48184	41,9	15,8	-	-	2-3	69-241-0	69-249-0		
135CM	482878	45,5	15,8	-	-	3	69-263-0	69-253-0		
Tiger Cub, Wildcat, Turf Tiger, Freedom Z52" deck (92CM, 132CM)	48185	45,7	15,8	-	-	2-3	69-242-0	69-258-0		
Tiger Cub, Wildcat, Turf Tiger, Freedom Z52" deck (92CM, 132CM)	481711	45,7	15,8	-	-	2-3	69-242-0	69-258-0		
Tiger Cub, Wildcat, Turf Tiger, Freedom Z52" deck (92CM, 132CM)	482306	45,7	15,8	-	-	2-3	69-242-0	69-258-0		
(92CM) 2000 ->	482462	45,7	15,8	-	-	2	69-242-0	69-258-0		
Tiger Cub, Wildcat, Turf Tiger, Freedom Z52" deck	48108	45,7	15,8	-	-	1	69-242-0	69-258-0		
Tiger Cub, Wildcat, Turf Tiger, Freedom Z52" deck (92CM, 132CM)	481707	45,7	15,8	-	-	2-3	69-242-0	69-258-0		
92CM, 132CM	482462	45,7	15,8	-	-	2-3	69-242-0	69-258-0		
92CM, 132CM	482467	45,7	15,8	-	-	2-3	69-242-0	69-258-0		
92CM, 132CM	A48108	45,7	15,8	-	-	2-3	69-242-0	69-258-0		
61", 155CM	482879	53,3	15,8	-	-	3	69-266-0	69-256-0		
61", 155CM	A48111	53,3	15,8	-	-	3	69-245-0	69-261-0		
61", 155CM	A48304	53,3	15,8	-	-	3	69-245-0	-		
SENTAR										
48", 122CM	71440002	41,9	15,8	-	-	3	69-241-0	69-249-0		
52", 132CM	71440001	45,7	15,8	-	-	3	69-242-0	69-258-0		
61", 155CM	71440003	53,3	15,8	-	-	3	69-245-0	-		
SNAPPER										

 									
82CM, 122CM	1-7036	41,2	15,8	-	-	2-3	69-239-0	69-248-0	
82CM, 122CM	1-7043	41,9	15,9	-	-	2-3	69-241-0	-	
92CM, 132CM	7-7344	45,5	15,8	-	-	2-3	69-242-0	69-258-0	
Pro series 0, Pro 7 series, 0, 1, 2, 4 (92CM, 132CM)	1-7037	45,5	15,8	-	-	2-3	69-242-0	69-258-0	
Pro series 0, Pro 7 series, 0, 1, 2, 4 (92CM, 132CM)	7-7037	45,7	15,8	-	-	2-3	69-242-0	69-258-0	
STAUB									
Groundsmaster (92CM, 132CM)	44-5480	45,7	12,7	-	-	2-3	69-263-0	69-253-0	
STIGA									
TRAC	114-0628-01	43,1	9,5	9,9	69,8	1	69-241-0	69-249-0	
EURO 45		43,5	10	10,5	52	1	69-241-0	69-249-0	
NG 464TR	81004365/3	43,5	18	8,8	65	1	-	69-252-0	
Belos 1300	1135-1540-01	45,5	10	8	90	3	69-263-0	-	
PARK 2000/2002/PONY (44", 110CM)	1111-1605-01	45,7	10	8,5	90	3	-	69-247-0	
PARK 2000/2002/PONY (44", 110CM)	1134-0456-00	45,7	10	8,5	90	3	-	69-247-0	
PARK 2000/2002/PONY (44", 110CM)	1134-1903-01	45,7	10	8,5	90	3	-	69-247-0	
PARK 2000/2002/PONY (44", 110CM)	1134-9001-01	45,7	10	8,5	90	3	-	69-247-0	
92CM, 132CM	303495	45,7	15,8	-	-	2-3	69-263-0	-	
430, 480 series	81004346/2	45,7	18	8,8	65	1	69-263-0	69-253-0	
430, 480 series	81004397/0	45,7	18	8,8	65	1	69-263-0	69-253-0	
MULTICLIP 46S/PRO 46 18", 46CM)	1111-1530-01	46	10	8	55	1	69-242-0	-	
MULTICLIP 46S/PRO 46 18", 46CM)	1111-1603-01	46	10	8	55	1	69-242-0	-	
MULTICLIP 46S/PRO 46 18", 46CM)	1111-9077-01	46	10	8	55	1	69-242-0	-	
MULTICLIP 46S/PRO 46 18", 46CM)	1111-9078-01	46	10	8	55	1	69-242-0	-	
MULTICLIP PRO 515	1111-3298-02	46	10	8	90	1	69-244-0	-	
MULTICLIP PRO 515	1111-9109-01	46	10	8	90	1	69-244-0	-	
MULTICLIP PRO 515	1111-9155-01	46	10	8	90	1	69-244-0	-	
SPL484	8104346/3	46	18	8,8	65	1	69-263-0	69-253-0	
SPL484 TR		46	18	8,8	65	1	69-263-0	69-253-0	
Estate Senator, Estate President Mulching	1111-9121-01	46	18	8,8	65	1	69-263-0	69-253-0	
Estate Senator, Estate President Mulching	81004346/3	46	18	8,8	65	1	69-263-0	69-253-0	
Estate Senator, Estate President	1111-9121-01	46,2	18	8,5	65	1	69-263-0	69-253-0	
534 TR	1111-9194-01	50,5	18	8,8	65	1	69-265-0	69-255-0	
TORO									
Z5000, Time Cutter 74375 (50", 127CM)	110-6837-03	44,4	15,8	-	-	3	-	69-252-0	
Time Cutter ZX , Recycler (132CM)	107-1741-03	45,5	15,8	-	-	3	69-263-0	-	
Time Cutter ZX , Recycler (132CM)	107-1742-03	45,5	15,8	-	-	3	69-263-0	69-253-0	
Groundsmaster (92CM, 132CM)	27-0990	45,7	12,7	-	-	2-3	69-263-0	69-253-0	
Groundsmaster (92CM, 132CM)	27-0990-03	45,7	12,7	-	-	2-3	69-263-0	69-253-0	
Groundsmaster (92CM, 132CM)	44-5480	45,7	12,7	-	-	2-3	69-263-0	69-253-0	
92CM, 132CM	56-2390	45,7	12,7	-	-	2-3	69-263-0	69-253-0	
92CM, 132CM	56-2390-03	45,7	12,7	-	-	2-3	69-263-0	69-253-0	

 										
(92CM, 132CM)	TR56-2390	45,7	12,7	-	-	2-3	69-263-0	69-253-0		
132CM	92-7961	45,7	12,7	-	-	3	69-263-0	69-253-0		
(92CM, 132CM)	TR27-0990	45,7	12,7	-	-	2-3	69-263-0	69-253-0		
455D (132", 340CM)	86-0010	48,2	12,7	-	-	7	69-264-0	-		
RECYCLER (38", 97CM)	57-4700	49	15,8	-	-	2	69-264-0	69-254-0		
RECYCLER (38", 97CM)	79-3060	49	15,8	-	-	2	69-264-0	69-254-0		
Groundsmaster 580P (406CM)	69-6920	50,8	15,8	-	-	11	69-265-0	69-255-0		
21", 53CM	108-3762-03	53	12,7	10	62	1	69-245-0	69-261-0		
21", 53CM	93-4106-03	53	12,7	10	62	1	69-245-0	69-261-0		
21", 53CM	TR93-4106-03	53	12,7	10	62	1	69-245-0	69-261-0		
Recycler 21" 20219, 20103, 20106, 20107, 20210, 20211, 20217, 20218, 491 <-1995	14-1659	53,1	11,1	9,5	61,9	1	69-266-0	-		
Recycler 21" 20219, 20103, 20106, 20107, 20210, 20211, 20217, 20218, 491 <-1995	14-9419	53,1	11,1	9,5	61,9	1	69-266-0	-		
Recycler 21" 20219, 20103, 20106, 20107, 20210, 20211, 20217, 20218, 491 <-1995	75-9420	53,1	11,1	9,5	61,9	1	69-266-0	-		
Recycler 21" 20219, 20103, 20106, 20107, 20210, 20211, 20217, 20218, 491 <-1995	80-0510	53,1	11,1	9,5	61,9	1	69-266-0	-		
Recycler 21" 20219, 20103, 20106, 20107, 20210, 20211, 20217, 20218, 491 <-1995	91-2256	53,1	11,1	9,5	61,9	1	69-266-0	-		
Timme Cutter Z, RZT420 (106CM)	106-2247-03	54,5	15,8	-	-	2	69-262-0	69-256-0		
42", 107CM	106-8744-03	54,5	15,8	-	-	2	69-267-0	69-257-0		
Groundsmaster (62", 158CM)	44-6250	54,6	12,7	-	-	3	69-266-0	69-256-0		
Recycler (62", 158CM)	92-5608	55	12,7	-	-	3	69-267-0	69-257-0		
22" Atomic	104-8697-03	55,2	11,5	-	-	1	69-246-0	-		
22" Atomic	108-9764-03	55,2	11,5	-	-	1	69-246-0	69-262-0		
VIKING										
HB 41, EP434	81004341/5	41	18	8,8	65	1	69-239-0	69-248-0		
MT545, MT585	6125 702 0110	46,2	18	8,5	65	1	69-263-0	69-253-0		
WESTWOOD										
Standard (36", 92CM)	4943	46	10	8	50	2	69-242-0	69-258-0		
WHEEL HORSE										
718Z (127cm)	113579	43	15,8	-	-	3	69-241-0	69-249-0		
WOODS										
112CM	70014	38,1	12,7	-	-	3	-	69-247-0		
155CM	70104	45,7	12,7	-	-	3	69-263-0	69-253-0		
155CM	70134	53,3	12,7	-	-	3	69-266-0	69-256-0		
YAMAHA										
YLM34P/S/SE, YLE242P/S	JYWT-54320-00	40	19	-	-	1	69-239-0	-		
	YWT-57374-20	45	19	-	-	1	69-242-0	-		

		
		
206	69-243-0	69-259-0
1206	69-263-0	69-253-0
1324	69-242-0	69-258-0
1893	69-242-0	69-258-0
4013	69-243-0	69-259-0
4943	69-242-0	69-258-0
5757	69-246-0	69-262-0
6004	69-266-0	-
6415	69-241-0	69-249-0
6895	69-242-0	
6898	69-245-0	
9258	69-241-0	69-249-0
9265	69-241-0	69-249-0
9433	69-241-0	-
9444	69-241-0	69-249-0
12441	69-245-0	69-261-0
12800	69-239-0	69-248-0
13920	-	69-247-0
18931	69-245-0	69-261-0
20045	69-243-0	69-259-0
20046	69-267-0	69-257-0
25124	-	69-261-0
25744	69-244-0	-
30278	-	69-252-0
31237	-	69-252-0
32022	69-242-0	-
38883	69-242-0	-
40130	69-243-0	69-259-0
42124	69-242-0	-
46998	69-241-0	69-249-0
46999	69-245-0	69-255-0
48108	69-242-0	69-258-0
48185	69-242-0	69-258-0
48864	69-245-0	69-255-0
53013	69-244-0	69-260-0
55013	69-244-0	69-260-0
70014	-	69-247-0
70104	69-263-0	69-253-0
70134	69-266-0	69-256-0

		
		
71285	69-242-0	69-258-0
72039	69-266-0	69-245-0
75270	69-242-0	69-258-0
76752	69-266-0	69-256-0
92418	69-239-0	-
98111	69-242-0	69-258-0
101733	69-266-0	69-256-0
113579	69-241-0	69-249-0
121263	69-242-0	69-258-0
129277	69-265-0	-
131694	69-265-0	-
133346	69-265-0	-
141114	69-246-0	
145106	69-265-0	-
159267	69-245-0	69-261-0
165833	69-266-0	69-256-0
175064	69-266-0	69-256-0
189028	69-266-0	69-256-0
192682	69-246-0	69-262-0
199377	69-266-0	69-256-0
201026	69-239-0	69-248-0
300130	69-264-0	69-254-0
303283	69-242-0	69-258-0
303495	69-263-0	-
313931	69-243-0	69-259-0
320019	69-242-0	69-258-0
320236	69-263-0	69-253-0
320242	69-266-0	69-256-0
328531	69-243-0	69-259-0
330032	69-245-0	69-261-0
343120	69-242-0	69-258-0
344020	69-241-0	69-249-0
390655	69-242-0	69-258-0
403059	69-239-0	69-248-0
405499	69-242-0	69-258-0
406712	69-266-0	69-256-0
406713	69-246-0	69-262-0
422225	69-267-0	69-257-0
460983	-	69-239-0

		
		
481707	69-242-0	69-258-0
481711	69-242-0	69-258-0
482306	69-242-0	69-258-0
482462	69-242-0	69-258-0
482467	69-242-0	69-258-0
482878	69-263-0	69-253-0
482879	69-266-0	69-256-0
490005	69-241-0	69-249-0
513519	-	69-247-0
513520	69-242-0	69-258-0
513621	69-242-0	69-258-0
530979	69-242-0	69-258-0
531486	-	69-247-0
531736	69-263-0	69-253-0
603283	-	69-255-0
603873	69-242-0	-
603874	69-265-0	-
633483	69-245-0	
653102	69-250-0	69-247-0
672029	69-244-0	69-260-0
672573	69-246-0	69-262-0
850972	69-244-0	69-260-0
850973	69-267-0	-
8779200	-	69-252-0
59006200	69-265-0	69-255-0
59006200	69-265-0	69-255-0
66010017	69-242-0	69-258-0
66010038	-	69-247-0
66010047	-	69-247-0
66030201	69-242-0	69-258-0
66070034	69-244-0	69-260-0
66070034	69-244-0	69-260-0
71440001	69-242-0	69-258-0
71440002	69-241-0	69-249-0
71440003	69-245-0	-
81004346	69-263-0	69-253-0
81004365	69-241-0	-
81004366	69-243-0	69-254-0
81004381	69-244-0	69-260-0

		
		
81004385	69-242-0	69-258-0
81004396	69-239-0	69-248-0
81004398	69-265-0	69-255-0
90892047	69-261-0	69-245-0
90892048	69-264-0	69-254-0
90895105	69-265-0	69-255-0
532121263	69-243-0	-
532143978	69-243-0	-
532145106	69-244-0	69-260-0
532752233	69-265-0	-
664531048	69-263-0	69-253-0
001851.33	69-263-0	69-253-0
041300/0	69-263-0	69-253-0
104-8697-03	69-246-0	
106-2247-03	69-262-0	69-256-0
106634X	69-243-0	69-259-0
106-8744-03	69-267-0	69-257-0
107-1741-03	69-263-0	-
107-1742-03	69-263-0	69-253-0
108-3762-03	69-245-0	69-261-0
108-9764-03	69-246-0	69-262-0
110-6837-03	-	69-252-0
1111-1530-01	69-242-0	-
1111-1603-01	69-242-0	-
1111-1605-01	-	69-247-0
1111-3298-02	69-244-0	-
1111-9077-01	69-242-0	-
1111-9078-01	69-242-0	-
1111-9078-01	69-242-0	-
1111-9109-01	69-244-0	-
1111-9121-01	69-263-0	69-253-0
1111-9155-01	69-244-0	-
1111-9194-01	69-265-0	69-255-0
112111-02	69-263-0	69-253-0
112111-03	69-266-0	69-256-0
112243-03	69-266-0	69-256-0
11234P1	69-241-0	69-249-0
1134-0456-00	-	69-247-0
1134-1903-01	-	69-247-0

		
		
1134-9001-01	-	69-247-0
1135-1540-01	69-263-0	-
114-0628-01	69-241-0	69-249-0
117453-C1	69-266-0	69-256-0
120262X	69-242-0	69-258-0
121263X	69-243-0	69-259-0
123461X	69-243-0	-
126338X	69-242-0	69-258-0
14-1659	69-266-0	
142978X	69-243-0	-
14-9419	69-266-0	
1875887	69-239-0	69-248-0
1876253	69-242-0	69-258-0
1878444	69-241-0	-
173-0412	69-241-0	69-249-0
173-2145	69-241-0	69-249-0
173-8571	69-241-0	69-249-0
174-7640	69-242-0	69-258-0
176-4381	69-266-0	69-256-0
177-2335	69-242-0	69-258-0
189-3850	69-267-0	69-257-0
25036R	69-243-0	69-259-0
25645R	69-242-0	69-258-0
27-0990	69-263-0	69-253-0
27-0990-03	69-263-0	69-253-0
302-40-803	69-263-0	-
310-1220	69-266-0	
32022A	69-242-0	69-258-0
32022HD	69-242-0	69-258-0
3R/1601/SIM48	69-263-0	69-253-0
42180B	69-245-0	69-261-0
423-40-803	69-267-0	-
42785E701	69-265-0	-
42785HT	69-243-0	69-259-0
44-5480	69-263-0	69-253-0
44-6250	69-266-0	69-256-0
506-8852-01	69-241-0	
516 44 38-00	69-263-0	
5164005-00	69-263-0	69-253-0

		
		
516-4139-00	69-244-0	-
516-4943-04	69-266-0	69-256-0
531-0050-09	69-241-0	
5310050-40	69-263-0	
531-0050-45	69-244-0	-
532 1750-52	69-245-0	69-261-0
5320256-45	69-242-0	69-258-0
5321212-63	69-243-0	69-259-0
5321222-60	69-242-0	69-258-0
5321263-38	69-242-0	69-258-0
532-126338	69-242-0	69-258-0
532-1411-14	69-246-0	69-262-0
532-1658-33	69-266-0	69-256-0
532-1750-64	69-266-0	69-256-0
532-1890-28	69-266-0	69-256-0
532-3552-56	69-246-0	
532-4067-12	69-266-0	69-256-0
532-7522-34	69-246-0	
5328509-72	69-265-0	-
532-8509-72	69-265-0	-
532-8509-73	69-266-0	69-256-0
532-8509-73	69-266-0	69-256-0
539-1032-74	-	69-247-0
539-1118-78	69-266-0	69-256-0
56-2390	69-263-0	69-253-0
56-2390-03	69-263-0	69-253-0
57-4700	69-264-0	69-254-0
60.00-4	69-264-0	-
60.04-4	69-245-0	-
61257020110	69-263-0	69-253-0
66071-61760	69-265-0	69-255-0
672573E701	69-246-0	69-257-0
672763E701	69-265-0	69-255-0
69-6920	69-265-0	69-255-0
70080-00450	-	69-252-0
742-0122	69-264-0	69-254-0
742-0123	69-265-0	69-255-0
742-0124	69-266-0	69-256-0
742-04154	69-263-0	-

	ONE FOR ALL	
	 GATOR®	 STD
742-0496	69-242-0	69-258-0
742-0503	69-266-0	69-256-0
742-0538	69-245-0	-
742-0638	69-242-0	69-258-0
742-0640	69-265-0	69-255-0
742-0641	69-266-0	69-256-0
742-0738	69-263-0	
742-0740	69-265-0	69-255-0
742-0818	69-242-0	69-258-0
742-0822	69-243-0	69-259-0
742-0828	69-244-0	69-260-0
742-3002	-	69-250-0
742-3003	-	69-252-0
742-3018	69-245-0	69-261-0
742-3019	69-241-0	69-249-0
75-9420	69-266-0	
76500-34330	-	69-249-0
76505-11550	-	69-252-0
1876434	69-242-0	69-258-0
1988564	69-242-0	69-258-0
79-3060	69-264-0	69-254-0
80-0510	69-266-0	
81004126/0	69-243-0	69-259-0
81004232/1	69-241-0	69-249-0
81004233/0	-	69-248-0
81004233/2	-	69-248-0
81004341/0	69-239-0	69-248-0
81004341/5	69-239-0	69-248-0
81004346/0	69-263-0	69-253-0
81004346/1	69-263-0	69-253-0
81004346/2	69-263-0	69-253-0
81004346/3	69-263-0	69-253-0
8100-43-463	69-263-0	69-253-0
81004360/1	-	69-248-0
81004360/2	-	69-248-0
81004360/3	-	69-248-0
81004365/1	-	69-252-0
81004365/3	-	69-252-0
81004366/0	69-264-0	69-254-0

	ONE FOR ALL	
	 GATOR®	 STD
81004366/2	69-243-0	69-254-0
81004370/0	69-264-0	69-254-0
81004381/0	69-244-0	69-260-0
81004395/0	69-264-0	69-254-0
81004395/1	69-264-0	69-254-0
81004396/0	69-239-0	69-248-0
81004396/0	69-239-0	69-248-0
8100-43-960	69-239-0	69-248-0
81004397/0	69-263-0	69-253-0
81004397/0	69-263-0	69-253-0
8100-43-970	69-263-0	69-253-0
81004398/0	69-265-0	69-255-0
8104346/3	69-263-0	69-253-0
8595306-002-00	-	69-252-0
86-0010	69-264-0	
8654306-001-00	69-266-0	69-256-0
8657306-001-00	69-264-0	69-254-0
91-2256	69-266-0	
92-5608	69-267-0	69-257-0
92-7961	69-263-0	69-253-0
93-4106-03	69-245-0	69-261-0
942-0640	69-265-0	69-255-0
942-0641	69-266-0	69-256-0
942-0738	69-263-0	
942-0740	69-265-0	
942-0828	69-244-0	69-260-0
A48108	69-242-0	69-258-0
A48110	69-241-0	69-249-0
A48111	69-245-0	69-261-0
A48184	69-241-0	69-249-0
A48304	69-245-0	-
AM10094	69-243-0	-
AM100946	69-264-0	69-254-0
AM104488	69-239-0	69-248-0
AM104489	69-241-0	69-249-0
AM112847	69-244-0	69-260-0
AM31100	69-239-0	69-248-0
AM35557	69-244-0	69-260-0
AM39966	69-241-0	69-249-0

	ONE FOR ALL	
	 GATOR®	 STD
B021300/0	-	69-251-0
BAN2111PB	69-263-0	69-253-0
CG81004396H0	69-239-0	-
GX20250	69-241-0	69-249-0
JYWT-54320-00	69-239-0	-
M112991	69-243-0	-
M1336	69-263-0	69-253-0
M139802	69-267-0	69-257-0
M1435	69-267-0	-
M145969	69-267-0	69-257-0
M2868	-	69-250-0
M3204	-	69-248-0
M41967	69-239-0	69-248-0
M4358	69-263-0	69-253-0
M4609	69-239-0	69-251-0
M48452	69-244-0	69-260-0
M5320	69-263-0	69-253-0
M82408	69-264-0	69-254-0
M84472	69-264-0	69-254-0
MS1173603	69-243-0	69-259-0
PC005	69-245-0	69-261-0
PC1255	69-239-0	69-248-0
PL4055	-	69-252-0
PL4205	69-241-0	-
PL4206	69-242-0	69-258-0
PL4855	69-241-0	-
PT8721	69-243-0	69-259-0
SB81004346/3	69-263-0	69-253-0
TR27-0990	69-263-0	69-253-0
TR56-2390	69-263-0	69-253-0
TR93-4106-03	69-245-0	69-261-0
WM132061	69-239-0	-
WM172039	69-266-0	69-245-0
YWT-57374-20	69-242-0	-

REPLACEMENT BLADES

ONE FOR ALL

69-247-0

1

ONE FOR ALL

69-243-0

69-253-0

5

ONE FOR ALL

69-242-0

69-258-0

2



3

ONE FOR ALL

69-242-0

69-258-0

4



6



7

G3

												
	MODEL	CM / INCHES		MM / INCHES							REQUIRED	
ALKO/DOLMAR/NOMA												
1	Alko #513519	Classic 40E, 40B, Comfort 40E	38,5 15"	19,7 3/4"	9 11/32"	65 2-1/2"	55 - 3 2-1/8" - 1/8"					69-247-0
2	Alko #513520, #513621 #530979, #343120	Sigma 460, Goldenline 460, Orion 460,474, Classic 46E, 46B, BR, BRE	46 18"	19,5 3/4"	9 11/32"	65 2-1/2"	55 - 3 2-1/8" - 1/8"					69-242-0 ④ 69-258-0
3	Alko #332039	Comfort 470 Bio-combi	46 18-5/8"	19,7 25/32"	12,7 x 20 1/2" x 7,9"	70 2-3/4"	55 - 4 2,16" - 5/32"			P621546000301		
4	Alko #531438, #405499		46,8 18-7/16"	19,5 3/4"	8 5/16"	65 2-1/2"	50 - 3,5 2" - 1/8"					69-242-0 ④ 69-258-0
5	Alko #328531	Aero-Keil 48cm (19"), MTD Super King 48, 48HM, 48BH	47,8 18-13/16"	19,7 3/4"	12,7 x 20 1/2" x .79"	70 2-3/4"	55 - 3,4 2.16" - .134"					69-243-0 ④ 69-253-0
ANTONIO CARRARO												
6	Caroni #59009200 Antonio Carraro	Rondo 1500	51,4	19	-	-	50,8 - 6,3 2" - .250"	152 / 60"		91-141	x3	69-265-0 ④ 69-255-0
7	Caroni #59009200 Antonio Carraro	Rondo 1500	51,4	19	-	-	50,8 - 6,3 2" - .250"	152 / 60"		96-605	x3	69-265-0 ④ 69-255-0





ONE FOR ALL

69-242-0
69-258-0

											
	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO		REQUIRED	
AYP/HUSQVARNA/JONSERED/PARTNER/ROPER/ELECTROLUX											
Husqvarna # 5440677-01, # 5055445		35,8 14-1/16"	10 .390"	8 .320"	40 1.57"	57,1 - 4,2 2.25" - .164"	94 / 37"		95-080	x3	
Husqvarna # 5441027-01, # 5041878		42 16-.56"	12,5 .492"	8,7 .345"	40 1.57"	57,1 - 4,2 2.25" - .164"	112 / 44"		95-081	x3	
AYP # 127841, # 532-127841 # 138496 Husqvarna # 5321384-96	HVA LT100, 112, 120, Jonsered LR10, 12, 112, LRH13 Partner 890, 1090, 1290	46,1 18-3/16"	15,8 star 5/8" star	9 3/8"	80 3-1/8"	57 - 3,5 2-1/4" - .140"	92 / 36"		05460B	x2	
AYP # 127841, # 532-127841 # 138496 Husqvarna # 5321384-96	HVA LT100, 112, 120, Jonsered LR10, 12, 112, LRH13 Partner 890, 1090, 1290	46,1 18-3/16"	15,8 star 5/8" star	- -	- -	57,1 - 4,7 2.25" - .187"	92 / 36"	⑩	95-026	x2	
AYP # 120262X, # 126338X # 121263 Jonsered # 532-122260 Husqvarna # 5321263-38	Jonsered LR, Partner 890, 1090, 1290	46,2 18-13/64"	9.5 3/8"	- -	- -	57,1 - 4,7 2.25" - .187"	92 / 36"	⑦		x2	69-242-0 ④ 69-258-0
AYP # 127842	HVA LT125, YTH 125, Jonsered LR, 12,13,LT14, YTH16, Partner 12-95	48,9 19-9/32"	15,8 star 5/8" star	9 3/8"	80 3-1/8"	57,1 - 3,5 2.25" - .134"	96,5 / 38"		05490B	x2	
AYP # 138497		48,9 19-9/32"	15,8 star 5/8" star	- -	- -	57,1 - 4,7 2.25" - .187"	96,5 / 38"	⑩	95-038	x2	
AYP # 134148 Husqvarna # 5321341-48		48,9 19-9/32"	15,8 star 5/8" star	- -	- -	57,1 - 3,5 2.25" - .134"	96,5 / 38"	④	05490MB	x2	





												
		MODEL	CM / INCHES	MM / INCHES			CM / INCHES	INFO			REQUIRED	ONE FOR ALL
1	AYP #127842, #139774 #134148X, #24692 #139744, #532134148 #532139774 Husqvarna #5321212-63 #5321278-42		48,9 19-9/32"	15,8 star 5/8" star	- -	- -	63,5 - 4,7 2.50" - .187"	96,5 / 38"		95-601	x2	
2	AYP #121263X Husqvarna #5321212-63	HVA LT960, 125, YTH 125, Jonsered LR10, 12,13, LT14,YTH16, Partner 1295	48,9 19-9/32"	9,5 3/8"	- -	- -	57,1 - 4,7 2.25" - .187"	96,5 / 38"	①		x2	69-243-0 ④ 69-259-0
3	AYP #850972	HVA JET 50, 51, Jonsered 600S, 600R, 450 Partner 150, 150H, 150D	50,6 19-15/16"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	63,5 - 4 2.50" - .149"	51 / 20"				69-244-0 ④ 69-260-0
4	AYP #25744		50,6 19-15/16"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	63,5 - 4 2.50" - .149"	51 / 20"				69-244-0 ④
5	AYP #145106 Husqvarna #532145106 Jonsered #532145106 Partner #532145106		50,8 20"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	57,1 - 3,4 2.25" - .134"	51 / 20"	④			69-265-0
6	AYP #127843, #138498 Husqvarna #5321278-43	HVA YT130, 150, YTH150, 160, Jonsered LT14, 15, LTH15 Partner 12, 5, 13, 14, 15, 105E, 105EH	53,5 21-3/32"	15,8 star 5/8" star	- -	- -	57 - 3,5 2-1/4" - .140"	107 / 42"		05535B	x2	
7	AYP #138498		53,5 21-3/32"	15,8 star 5/8" star	- -	- -	57,1 - 4,7 2.25" - .187"	107 / 42"	⑩	195-039	x2	
8	AYP #127843		53,5 21-3/32"	15,8 star 5/8" star	- -	- -	57,1 - 4,7 2.25" - .187"	107 / 42"	⑩	195-048	x2	





												
		MODEL	CM / INCHES	MM / INCHES			CM / INCHES	CM / INCHES	INFO		REQUIRED	
1	AYP #134149 Husqvarna #5321341-49		53,5 21-3/32"	15,8 star 5/8" star	9 3/8"	80 3-1/8"	57 - 3,5 2-1/4" - .140"	107 / 42"	1	05535MB	x2	
2	AYP #138498, #138971 Husqvarna #5321278-43 #5321384-98		53,5 21-3/32"	15,8 star 5/8" star	- -	- -	57,1 - 4,7 2.25" - .187"	107 / 42"		96-900	x2	
3	AYP #159267		53,5 21-3/32"	16 5/8"	10 3/8"	48 1-7/8"	57 - 3,5 2-1/4" - .140"	53 / 21"	1			69-266-0 1
4	AYP #175064		53,5 21-3/32"	16 5/8"	9,5 3/8"	47,5 1-7/8"	70 - 3.3 2.75" - .130"	53 / 21" 106,6 / 42"	1		x1 x2	69-266-0 1 69-255-0
5	AYP #175064		53,5 21-3/32"	16 5/8"	9,5 3/8"	47,5 1-7/8"	70 - 4 2.75" - .149"	53 / 21" 106,6 / 42"			x1 x2	69-266-0 1
6	AYP #168721, #175451 #180584		54,3 21-1/3"	6 pt. star	13 1/2"	85 3.34"	57,1 - 4 2-1/4" - .160"	107 / 42"	1 1	P635854300901	P635854300701	
7	AYP #168710, #180583 #175450		54,3 21-1/3"	6 pt. star	13 1/2"	85 3.34"	57,1 - 4 2-1/4" - .160"	107 / 42"	1 1	P635854300701	P635854300901	
8	AYP #406713, #192682	FR6852SH, 9612400J	55,4 21-53/64"	15,8 5/8"	9,6 3/8"	47,6 1-7/8"	57,1 - 3,4 2.25" - .134"					69-246-0 1 69-262-0
9	AYP #141114		55,2 21-3/4"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	57,1 - 3,4 2.25" - .134"	56 / 22"	1			69-246-0 1
10	AYP #850973, #69334		55,2 21-3/4"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	63,5 - 4 2.50" - .149"	56 / 22"	1			69-246-0 1 69-262-0



ONE FOR ALL

69-246-0

1

ONE FOR ALL

69-267-0

2

ONE FOR ALL

69-267-0

3

ONE FOR ALL

69-241-0

69-249-0

4



5



6

G3



7

G6



8

G3



9

G6



10

G3

		MODEL	CM / INCHES	MM / INCHES	MM / INCHES	MM / INCHES	MM / INCHES	CM / INCHES	INFO		REQUIRED	
1	AYP #752234 Husqvarna #5321411-14		55,2 21-3/4"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	50 - 3,8 2" - 1/8"	56 / 22"	1			69-246-0 1
2	AYP #134768, #141114 #157101 Husqvarna #532850973		55,2 21-3/4"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	63,5 - 3,9 2.50" - .149"	56 / 22"	1			69-267-0 1
3	AYP #850973	Husqvarna Jet 55, Partner 55	55,2 21-3/4"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	63,5 - 3,9 2.50" - .149"	56 / 22"				69-267-0 1

BOLENS

4	Bolens #1738571	30048S, 30048E, 18336, 19211	43,1 16-31/32"	9,5 3/8"	9,5 3/8"	69,8 2-3/4"	50,8 - 4,7 2.00" - .187"	122 / 48"			x3	69-241-0 1 69-249-0
5	Bolens #742-0616, #742-0616A		53,8 21-3/16"	15,8 6 star	-	-	76,2 - 3,9 3.00" - .149"	-		198-153	x2	

BUNTON

6	Bunton #PL4855, #PL4205		41,9 16-1/2"	15,8 5/8"	-	-	63,5 - 5,1 2.50" - .203"	81 / 32" 122 / 48"		96-308	x2 x3	69-241-0 1
7	Bunton #PL4205, #PL4055		41,9 16-1/2"	15,8 5/8"	-	-	76,2 - 6,3 3" - .250"	81 / 32" 122 / 48"		396-735	x2 x3	
8	Bunton #PL4206	John Deere # AM104490	45,7 18"	16 5/8"	-	-	63,5 - 5 2.50" - .203"	92 / 36" 132 / 52"		96-344	x2 x3	69-242-0 1
9	Bunton #PL4206	John Deere # AM104490	45,7 18"	16 5/8"	-	-	76,2 - 6,3 3" - .250"	92 / 36" 132 / 52"		396-726	x2 x3	69-242-0 1
10	Bunton #PC005		53,1 20-15/16"	16 5/8"	-	-	63,5 - 5 2.50" - .203"	152 / 60"		96-347	x3	69-245-0 1





		 MODEL	 CM / INCHES						 CM / INCHES	 INFO		 REQUIRED	
CARONI													
1	Caroni #59009200 Antonio Carraro #Rondo 1500	TC590N, TC590NSLD	51,4 20-1/4"	19 3/4"	- -	- -	50,8 - 6,3 2.00" - .250"	152 / 60"			91-141	x3	69-265-0 ④ 69-255-0
2	Caroni #59009200 Antonio Carraro #Rondo 1500	TC590N, TC590NSLD	51 20"	19 3/4"	- -	- -	63,5 - 5,1 2.50" - .203"	152 / 60"			96-605	x3	69-265-0 ④
3	Caroni #71001000	TC710N	61,5 24-1/4"	19 3/4"	- -	- -	63,5 - 6,3 2.50" - .250"	180 / 71"			396-707	x3	
CASTELGARDEN/HONDA/VIKING/STIGA/FARM+ GARTEN													
4	Castelgarden # 81004360/1	New Garda 410, 414	39 15-3/8"	18 0.70"	8,5 5/16"	65 2-1/2"	50 - 3 2" - 1/8"						69-248-0
5	Castelgarden # 81004396/0	430, 480 series	40,8 16-1/16"	18 0.70"	8,8 .350"	65 2.6"	55 - 3 2.16" - .118"						69-239-0 ④ 69-248-0
6	Castelgarden # 81004341/0	Raser 43 etc.	41 16-1/8"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - 5/32"						69-239-0 ④ 69-248-0
7	Castelgarden # 81004365/1		43,5 17-1/8"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - 5/32"						69-252-0
8	Castelgarden # 81004365/3	460	43,5 17-1/8"	18 0.70"	8,5 .335"	65 2-1/2"	57 - 4 2.24" - 5/32"			④			69-241-0 ④
9	Castelgarden # 81004385	S474L, G45	44,9 17-46/64"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - 5/32"			④			69-242-0 ④
10	Castelgarden # 81004397/0	430, 480 series	45,7 18"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - .157"						69-263-0 ④ 69-253-0
11	Castelgarden # 81004346/2	T430, T434, T480, T484	46 18-7/64"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - .157"						69-263-0 ④ 69-253-0
12	Castelgarden # 82004345/0	Twin Cut Junior	46 18-7/64"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 3 2.16" - .118"	92 / 36"		④	40461LMB	40461RMB	






		 MODEL	 CM / INCHES	 18	 8,8	 65	 55 - 3	 92 / 36"	 INFO		 #	
				MM / INCHES							REQUIRED	
1	Castelgarden #82004353/0	Twin Cut 92 Junior	46 18-7/64"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 3 2.16" - .118"		2	40461RMB	40461LMB	
2	Castelgarden #81004395	500 series	47,6 18-3/4"	18 0.70"	8,8 .350"	65 2-1/2"	57 - 4 2.24" - 5/32"					69-264-0 4 69-254-0
3	Castelgarden #81004366	474TT, N504	48 18-57/64"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - .157"					69-243-0 4 69-254-0
4	Castelgarden #81004366/2	474TT-NG504-NG504TR-TRE	48 18-57/64"	18 0.70"	8,8 .350"	65 2-1/2"	57 - 4 2.24" - 5/32"		4			69-243-0 4 69-254-0
5	Castelgarden #81004126/0		50 19-3/4"	18 0.70"	8,8 .350"	65 2-1/2"	60 - 4 2-3/8" - 5/32"					69-243-0 4 69-259-0
6	Castelgarden #81004398/0	RL 534	50,5 19-7/8"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - .157"					69-365-0 4 69-255-0
7	Castelgarden #81004381	530	50,3 19-7/8"	18 0.70"	8,5 .335"	65 2-1/2"	55 - 4 2.16" - .157"		4			69-260-0 4 69-244-0
8	Castelgarden #82004340/0 Viking #61517020100	Twin Cut	51,9 20-7/16"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - .157"	102 / 40"	2	55520RB	55520LB	
9	Castelgarden #82004340/0 Viking #61517020100	Twin Cut	51,9 20-7/16"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4.6 2.16" - .180"	102 / 40"	1	55520LB	55520RB	
10	Castelgarden #82004341/0 Viking #61517020105	Twin Cut	51,9 20-7/16"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - .157"	102 / 40"	2	91-958	91-959	
11	Castelgarden #82004341/0 Viking #61517020105	Twin Cut	51,9 20-7/16"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4.6 2.16" - .180"	102 / 40"	1	91-959	91-958	
12	Castelgarden #82004347/0	Twin Cut 102 Mulching	52 20-7/16"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - .157"	102 / 40"	2 4	55520RMB	P625552002701	
13	Castelgarden #82004347/0	Twin Cut 102 Mulching	52 20-7/16"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - .157"	102 / 40"	1 4	P625552002701	55520RMB	





												
		MODEL	CM / INCHES			MM / INCHES		CM / INCHES	INFO		REQUIRED	
CUB CADET												
1	Cub Cadet #742-04053A		45,4 17-7/8"	6 pt. star	-	-	63,5 - 4,7 2.50" - .187"	127 / 50"		91-938	x3	
2	Cub Cadet #742-04087, #942-04087	"LTX1040, LTX1042, LTX1042KW, LTX1042KH, LTX1045, RZT42, RZT-S42, RZT-L42"	53,8 21-3/16"	15,8 6 star	-	-	76,2 - 3,9 3.00" - .149"	127 / 50"		198-153	x2	
DIXON												
3	Dixon #8688	Model # 428-429, 542	36,8 14-1/2"	17,7 .700"	-	-	50,8 - 4,7 2.00" - .187"	107 / 42"			x3	69-247-0
4	Dixon #9265, #9258		43,2 17"	15,8 5/8"	-	-	63,5 - 5,1 2.50" - .203"	127 / 50"			x3	69-241-0 4
5	Dixon #539119871, #9383		52 20-1/2"	15,8 5/8"	-	-	63,5 - 6,3 2.50" - .250"	152 / 60		396-740	x3	
6	Dixon #539109755, #539105711, #522936601, #522829301, #574481301		53,3 21"	15,8 5/8"	-	-	63,5 - 5,1 2.50" - .203"	-		91-308	x3	
EFCO/EMAK/OLEO MAC/TROMECA												
7	Efco #66030201	Efco LR47PB, Oleo-Mac G47 X / A / TAS	45,5 18"	10 3/8"	8 5/16"	65 2-1/2"	50 - 4 2" - 5/32"					69-242-0 4 69-258-0
8	Efco #66040017	Efco LR47PE, Oleo-Mac GE47	45,5 18"	21 13/16"	10,5 3/8"	52 2"	50 - 4 2" - 5/32"					69-242-0 4 69-258-0
9	Efco #66070034	Efco G53TX	51 20"	10 3/8"	8 5/16"	65 2-1/2"	55 - 3 2-1/8" - 1/8"					69-244-0 4 69-260-0
10	Efco #8203141		52 20-1/2"	34 1-5/16"	10,2 3/8"	110 4-5/16"	75 - 2,5 2-15/16" - .10"			P6297520001		



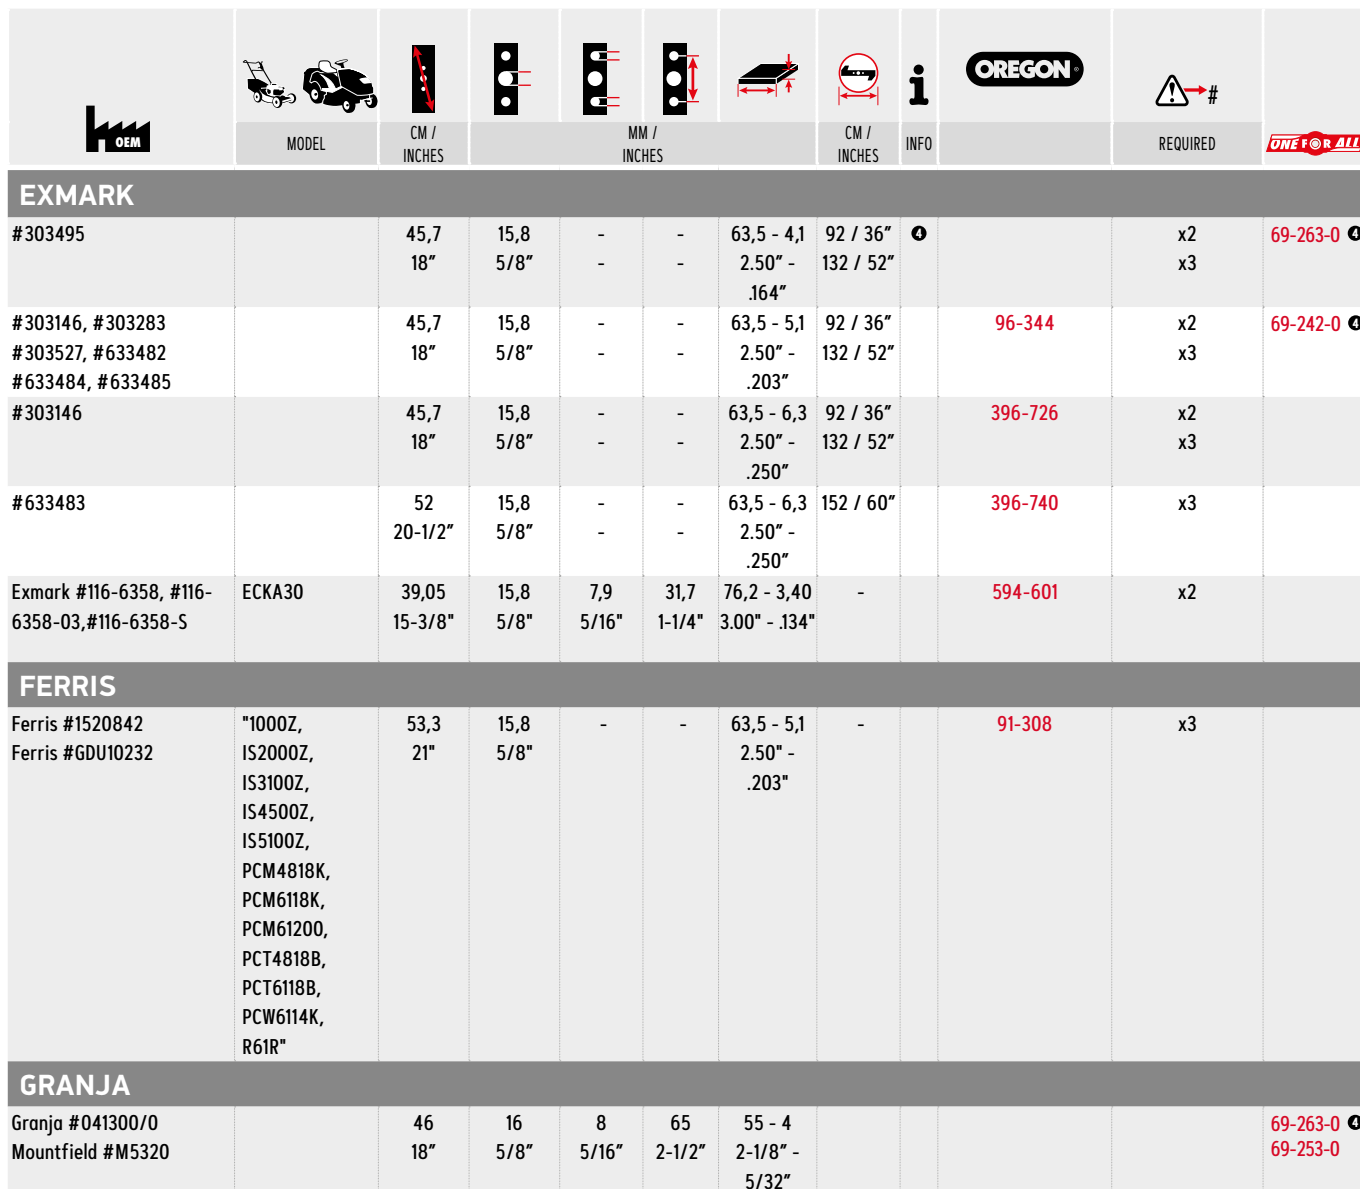



											
	MODEL	CM / INCHES	MM / INCHES			CM / INCHES	INFO		REQUIRED		
GRASSHOPPER											
Grasshopper #320236		45,7 18"	12,7 1/2"	- -	- -	50,8 - 5,1 2.00" - .203"	132 / 52"			x3	69-263-0 ④ 69-253-0
Grasshopper #320236		45,7 18"	12,7 1/2"	- -	- -	63,5 - 6,3 2.50" - .250"	132 / 52"		96-329	x3	69-263-0 ④
Grasshopper #320236		45,7 18"	12,7 1/2"	- -	- -	63,5 - 6,3 2.50" - .250"	132 / 52"			x3	69-263-0 ④
Grasshopper #320242		53,9 21"	12,7 1/2"	- -	- -	63,5 - 6,3 2.50" - .250"	155 / 61"			x3	69-266-0 ④ 69-256-0
Grasshopper #320243, #320242		53,3 21"	12,7 1/2"	- -	- -	63,5 - 6,3 2.50" - .250"	155 / 61"		396-712	x3	
GRAVELY											
Gravely #46998		43,2 17"	15,8 5/8"	- -	- -	63,5 - 5,1 2.50" - .203"	127 / 50"			x3	69-241-0 ④
Gravely #25124		52,1 20-1/2"	15,8 5/8"	- -	- -	63,5 - 6,3 2.50" - .250"	152 / 60"		396-740	x3	
Gravely #GDU10232		53,3 21"	15,8 5/8"	- -	- -	63,5 - 5,1 2.50"- .203"	-		91-308	x3	
GREAT DANE											
Great Dane #D18037		45,7 18"	15,8 5/8"	6,3 1/4"	41,2 1-5/8"	63,5 - 5,1 2.50" - .203"	132 / 52"			x3	69-242-0 ④ 69-258-0
Great Dane #D18037		45,7 18"	15,8 5/8"	- -	- -	63,5 - 5,1 2.50" - .203"	132 / 52"		96-344	x3	69-242-0 ④
Great Dane #D18037		45,7 18"	15,8 5/8"	- -	- -	63,5 - 6,3 2.50" - .250"	132 / 52"		396-726	x3	69-242-0 ④
Great Dane #D18036	HVA ZHT 5223	53,3 21"	15,8 5/8"	- -	- -	63,5 - 6,3 2.50" - .250"	155 / 61"		396-727	x3	





												
		MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO		REQUIRED	
1	Great Dane #D18036 #GDU10232	All models	53,3 21"	15,8 5/8"	-	-	63,5 - 5,1 2.50" - .203"	-		91-308	x3	
HAYTER												
2	Hayter #201026	Hobby Petrol	40,6 16"	16 5/8"	-	-	57 - 3,4 2.24" - .134"					69-239-0 ④ 39-248-0
3	Hayter #40130	48cm (19") old, Harrier/Kestrel	48,2 19"	16 5/8"	-	-	63,5 - 3,8 2.50" - .149"					69-243-0 ④ 69-259-0
4	Hayter #4013	Harrier, Kestrel 48cm (19")	48 19"	19 3/4"	-	-	63,5 - 3,2 2.50" - .126"			91-893		69-243-0 ④ 69-259-0
5	Hayter #480149	Harrier 48, Harrier 2, Ranger 48, Motif 48	48 19"	15,8 5/8"	10,5 7/16"	94 3-11/16"	63,5 - 3 2-1/2" - .120"			P6303480002		
HONDA ⇄ CASTELGARDEN												
6	Honda #CG81004397H0	Pan-European HRF 464S, HRG465C, HRF465PS, HRG465	45,7 17"	18 .710"	8,8 .350	65 2.6"	55 - 4 2-3/16" - .16"					69-263-0 ④ 69-253-0
7	Castelgarden # 82004348/0	Twin Cut 102 Mulching	52 20-7/16"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - .157"	102 / 40"	① ④	P625552002701	55520RMB	
8	Castelgarden # 82004348/0	Twin Cut 102 Mulching	52 20-7/16"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - .157"	102 / 40"	② ④	55520RMB	P625552002701	
9	Honda #CG82004340/00	TwinCut 120	51,9 20-7/16"	18,2 .719"	8,7 11/32"	65 2.6"	55 - 4 2-5/32" - .16"	120 / 40"	②	55520RB	55520LB	
10	Honda # CG82004340/00	TwinCut 120	51,9 20-7/16"	18,2 .719"	8,7 11/32"	65 2.6"	55 - 4 2-5/32" - .16"	120 / 40"	①	55520LB	55520RB	
11	Honda #72511-VE1-651 #72511-VE1-650 #72511-VE1-652	HRB 535, HRD 536, IZY 53	52,4 20-5/8"	21,4 .844"	10,4 .410"	88 3-1/2"	83 - 2.5 3.27" - .10"			66535B		





											
	MODEL	CM / INCHES	MM / INCHES			CM / INCHES	INFO	REQUIRED			
HUSQVARNA ↔ AYP											
Husqvarna #506-6687-01 #5065518-01 #5066765-01 #5310050-11	Model 850-12	30,4 11-13/32"	10,2 .404	8,2 .326"	60,3 2-3/8"	50 - 4 2" - 3/16"	86 / 34"		10300B	x3	
Husqvarna #5440677-01, #5055445		35,8 14-1/16"	10 .930"	8 .320"	40 1-9/16"	57,1 - 4,2 2.25" - .164"	94 / 55"		95-080	x3	
Husqvarna #5055445		36 14-3/16"	10,2 .404"	8,2 .326"	40 1-9/16"	50 - 4 2" - 3/16"			P621035900101		
Husqvarna #5041882-01 #5441030-01	Rider 15T AWD, 15TS AWD, 15T, 15V2, 15V2 AWD 15V2S AWD, 155, 155 AWD, 155 EU, 16, 175, 175 AWD, 15, 18 AWD, PRO15, PRO 18, PRO 18 AWD	38,8 15-1/4"	10,3 7/16"	8,2 5/16"	40 1-9/16"	50 - 4 2" - 3/16"			94-083		
Husqvarna #5441027-01 #5041878		42 16.56"	12,5 .492"	8,7 .345"	40 1.57"	57,1 - 4,2 2.25" - .164"	112 / 44"		95-081	x3	
Husqvarna #173920, #180054 #532180054		42,2 16-5/8"	15,8 star 5/8" star	-	-	76,2 - 4,7 3" - .187"			596-615		
Husqvarna #506-8852-01 #531-0050-09	Pro-Flex, R1200	43,7 17.2"	10 .394"	-	-	63,5 - 5,2 2.50" - .204"	130 / 51"			x3	69-241-0 ④
Husqvarna #5164438-00 #5310050-40	BioClip Mulcher, Team Partner ABS	46 18-3/16"	10 .394"	8,5 5/16"	65 2.6"	58 - 3,5 2.26" - .134"		④			69-263-0 ④
Husqvarna #532-1278-41 #138496 #532 13 84-96 #532 12 63-38	HVA LT100, 112, 120, Jonsered LR10, 12, 112, LRH13, Partner 890, 1090, 1290	46 18-3/16"	15,8 star 5/8" star	-	-	57,1 - 4,7 2.25" - .187"	92 / 36"	⑩	95-026	x2	





													
		MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO			REQUIRED	
1	Husqvarna #532-1278-41 #138496	LT100	46 18-3/16"	15,8 star 5/8" star	9 3/8"	80 3-1/8"	57 - 3,5 2-1/4" - .14"	92 / 36"			05460B	x2	
2	Husqvarna #5321212-63	HVA LT125, YTH125, Jonsered LR10, 12, 13, LT14, YTH16, Partner 12-95	49 19-9/32"	9,5 3/8"	-	-	57,1 - 4,7 2.25" - .187"	96,5 / 38"	7			x2	69-243-0 4 69-259-0
3	Husqvarna #532-1278-42 #532-1384-97	HVA LT125, YTH125, Jonsered LR10, 12, 13, LT14, YTH16, Partner 12-95	49 19-9/32"	15,8 star 5/8" star	9 3/8"	80 3-1/8"	57 - 3,5 2-1/4" -	96,5 / 38"			05490B	x2	
4	Husqvarna #138497	HVA LT125, YTH125, Jonsered LR10, 12, 13, LT14, YTH16, Partner 12-95	49 19-9/32"	15,8 star 5/8" star	-	-	57,1 - 4,7 2.25" - .187"	96,5 / 38"	10		95-038	x2	
5	Husqvarna #5321341-48 AYP #134148		49 19-9/32"	15,8 star 5/8" star	9 3/8"	80 3-1/8"	57 - 3,5 2-1/4" - .14"	96,5 / 38"	4		05490MB	x2	
6	Husqvarna #5321278-42 #530127-84 #5321384-97 AYP #127842		49 19-9/32"	15,8 star 5/8" star	-	-	63,5 - 3,9 2.50" - .164"	96,5 / 38"			95-601	x2	
7	Husqvarna #532-8509-72	HVA Jet50, 51, Jonsered 600S, 600R, 450, Partner 150, 150H, 150D	50,8 20"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	63,5 - 4 2.50" - .16"	51 / 20"					69-244-0 4 69-260-0





													
		MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO			REQUIRED	
1	Husqvarna #532145106	HVA Jet50, 51, Jonsered 600S, 600R, 450, Partner 150, 150H, 150D	50,8 20"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	57 - 3,5 2-1/4" - .14"	51 / 20"	1				69-265-0 1
2	Husqvarna #516-4943-04	Royal 53	53 20,86"	9,9 .390"	8,4 5/16"	65 2-9/16"	76 - 3 3" - .118"						69-266-0 4 69-256-0
3	Husqvarna #532 1993-77	Royal 152, R52	53,2 20-15/16"	16 5/8"	10 .394"	48 1 - 7/8"	63,5 - 3 2.50" - .118"				95-065		
4	Husqvarna #532 1750-52	R52SE, P5553, 4553, 753, 553	53,2 20-15/16"	16 5/8"	9,5 3/8"	48 1 - 7/8"	63,5 - 3 2.50" - .118"		7				69-245-0 4 69-261-0
5	Husqvarna #539101733 Husqvarna #539102093	2348, 30, 4217, 4819, 4821, 5221, 5223, 5225, 5227, 61, 6123, 6125, 6127, 6130, 6134, 7230	53,3 21"	15,8 5/8"	-	-	63,5 - 5,1 2.50" - .203"	-			91-308	x3	
6	Husqvarna #127843, #138498 #5321278-43		53,5 21-1/16"	15,8 star 5/8" star	-	-	57 - 3,5 2-1/4" - .14"				05535B		
7	Husqvarna #134149		53,5 21-1/16"	15,8 star 5/8" star	9 3/8"	80 3-1/8"	57 - 3,5 2-1/4" - .14"				05535MB		
8	AYP #180584, #168721 #175451 Husqvarna #5321805-84	CTH18, CTH150, CTH210, P18H107, PM1842HRB, M180HCRD, M1145HCRD	54,3 21-1/3"	6 pt. star	13 1/2"	85 3,34"	57 - 4 2-1/4" - .157"	107 / 42"	1 8 4		P635854300901	P635854300701	
9	AYP #168710, #180583 #175450 Husqvarna #531 1805-83	CTH18, CTH150, CTH210, P18H107, PM1842HRB, M180HCRD, M1145HCRD	54,3 21-1/3"	5 pt. star	13 1/2"	85 3,34"	57 - 4 2-1/4" - .157"	107 / 42"	2 8 4		P635854300701	P635854300901	





													
		MODEL	CM / INCHES	MM / INCHES			CM / INCHES	CM / INCHES	CM / INCHES	INFO		REQUIRED	
1	Husqvarna #532 1804-25	CTH18, CTH150, CTH210, P18H107, PM1842HRB, M180HCRD, MI145HCRD	54,3 21-1/3"	10 .394"	13 - 10 1/2" - .394"	85 - 80 3,34" - 3,14"	57 - 4 2-1/4" - .157"	107 / 42"		 	P635854301001	P635854300801	
2	Husqvarna #532 1804-24	CTH18, CTH150, CTH210, P18H107, PM1842HRB, M180HCRD, MI145HCRD	54,3 21-1/3"	10 .394"	13 - 10 1/2" - .394"	85 - 80 3,34" - 3,14"	57 - 4 2-1/4" - .157"	107 / 42"		 	P635854300801	P635854301001	
3	Husqvarna #5321411-14		55,1 21-21/32"	16 .630"	9,5 3/8"	48 1.9"	50 - 3,8 2" - .15"						69-246-0 
4	Husqvarna #532-8509-73	HVA Jet 55S, Jonsered 455SD, Partner 155LD, 355D	55,2 21-3/4"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	63,5 - 4 2-1/2" - .16"	56 / 22"					69-246-0  69-262-0
5	Husqvarna #532-8509-73 AYP #850973	Jet 55. Partner 55	55,2 21-3/4"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	63,5 - 3.8 2.50" - .149"	56 / 22"					69-246-0 
ISEKI													
6	Iseki #8595-306-002-00	SG153, SG173	43 16-7/8"	14,5 9/16"	-	-	60 - 6 2-3/8" - 1/4"	122 / 48"				x3	69-252-0
7	Iseki #8654-306-00 #8654-306-011-0		53,3 21"	15,8 5/8"	-	-	63,5 - 6,3 2.50" - .250"	155 / 61"				x7	69-266-0  69-256-0
8	Iseki #8654-306-00 #8654-306-011-0		53,3 21"	15,8 5/8"	-	-	63,5 - 6,3 2.50" - .250"	155 / 61"			396-702	x7	
JACOBSEN  FORD													
9	Jacobsen #390665		45,7 18"	15,9 5/8"	-	-	63,5 - 5,1 2.50" - .203"	92 / 36" 132 / 52"			96-344	x2 x3	69-242-0  69-258-0
10	Jacobsen #390665		45,7 18"	15,9 5/8"	-	-	63,5 - 6,3 2.50" - .250"	92 / 36" 132 / 52"			396-726	x2 x3	





												
		MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO		REQUIRED	
1	Jacobsen #392564, #M144935		55,6 21-29/32"	23 29/32"	-	-	63,5 - 6,3 2.50" - .250"			396-710		
2	Jacobsen #JT391039		58,5 23"	13,5 17/32"	10,3 13/32"	73 2-7/8"	63,5 - 6,3 2.50" - .250"		1	96-696		
JOHN DEERE												
3	John Deere #AM31100, #M41967	Model 46-47-48	40,6 16"	17,5 11/16"	-	-	50 - 5 2" - .20"	117 / 46"			x3	69-239-0 ④ 69-248-0
4	John Deere #AM104489		41,9 16-1/2"	15,9 5/8"	-	-	63,5 - 5,1 2.50" - .203"	82 / 32" 122 / 48"		96-308	x2 x3	69-241-0 ④
5	John Deere #AM104489		41,9 16-1/2"	15,9 5/8"	-	-	63,5 - 6,3 2.50" - .250"	82 / 32" 122 / 48"		396-735	x2 x3	
6	John Deere #GX20250	100 Series	43 17"	17 11/16"	10,3 13/32"	85 3-11/16"	63,5 - 5,2 2-1/2" - .203"	122 / 48"			x3	69-241-0 ④
7	John Deere #M127673, #M127500		43,4 17-3/32"	20,6 13/16"	-	-	63,5 - 5,1 2.50" - .203"	122 / 48"		96-354	x3	
8	John Deere #PT8721		45,7 18"	15,9 5/8"	-	-	63,5 - 5,1 2.50" - .203"	91 / 36" 132 / 52"		96-344	x2 x3	69-242-0 ④
9	John Deere #PT8721		45,7 18"	15,9 5/8"	-	-	63,5 - 6,3 2.50" - .250"	91 / 36" 132 / 52"		396-726	x2 x3	
10	John Deere #M143520, #M145516	54C Convertible	48 18-7/8"	20 13/16"	-	-	63,5 - 6 2-1/2" - 1/4"	138 / 54"		396-719	x3	
11	John Deere # M144652, # M134305, #M135334, #M136195, #M164016, #M164016, #TCU30316, #TCU30317		48,2 19 "	22,2 7/8 "	-	-	76,5 - 6,3 3.00 " - .250"	-		396-769		





1

ONE FOR ALL

69-264-0
69-254-0

2

ONE FOR ALL

69-264-0

3



4

G6

												
		MODEL	CM / INCHES	MM / INCHES			CM / INCHES	CM / INCHES	INFO		REQUIRED	ONE FOR ALL
1	John Deere # AM100946, M82408	11 - 111H - 112L - 116H - 130 - 160 - 165 - 2056 - 170 - 175 - 180 - 185 - 2084 - S80 - S82 - S92 - 2106 - RX63 - RX73 - RX75 - SX75 - RX95 - SX95 - 2150 - 240 - 245 - 260 - 265 - 285 - 320 - 2232 - SRX75 - SRX95 - 2317 - STX38 - LX172 - LX173 - LX176 - LX178 - LX186 - LX188 - 2342 - GT242 - GT262 - GT275 - 2399 - LT133 - 2607 - LT155 - 2608 - LT166 - 2725 - LT150 - 9072 - LT160	49,5 19-1/2"	17,4 11/16"	9,5 3/8"	101,6 4"	50,3 - 5,3 2.3" - 0.203"	-	2	191-392	x2	
2	John Deere #M84472		49,5 19-1/2"	17,8 45/64"	-	-	76,2 - 5 3"-20"	96,5 / 38"	7		x2	69-264-0 4 69-254-0
3	John Deere #M82408, #AM10094		49,5 19-1/2"	17,8 45/64"	-	-	63,5 - 5,1 2.50"-203"	96,5 / 38"			x2	69-264-0 4
4	John Deere #AM100538	Roberine "802"	52 20-1/2"	23,1 .910"	-	-	63,5 - 6,3 2.50"-250"	153 / 60"		396-734	x3	





												
		MODEL	CM / INCHES	MM / INCHES			CM / INCHES	INFO			REQUIRED	
1	John Deere #101733	ZKH61121, ZKH61251, ZMKW61231, ZVH061242, ZVKH61272, ZVKW61252, ZWKH61303, ZWKH61243, ZWKH61273	53,3 21"	15,8 5/8"	-	-	63,5 - 5,1 2.50"-.203"	-		91-308	x3	
2	John Deere #AM137327, #AM137328, # AM137329, #AM137330, #AM137333, #AM141031, #AM141032, #AM141033, #AM141034, #GX22151, #GY20850, #M149422, #M154061, #M154062		54,2 21-3/8"	7 Star	-	-	76,5- 6,3 3"- .203"	-		592-615		
3	John Deere #M139802, #M145969	LT-166	54,6 21-1/2"	17,4 11/16"	-	-	63,5 - 4,1 2.50"-.164"	106 / 42"		91-449	x2	69-267-0  69-257-0
4	John Deere #M145245LH #AM131560	LTR155, LTR166, LTR180	55,3 21-3/4"	35 x 20,5 1-3/8" x 13/16"	-	-	84 - 5 3-5/16" -20"			94-081		
5	John Deere #M145243RT #AM131560	LTR155, LTR166, LTR180	55,3 21-3/4"	35 x 20,5 1-3/8" x 13/16"	-	-	84 - 5 3-5/16" - 20"			94-082		
6	John Deere #TCU51118		55,5 21-7/8"	23 29/32"	-	-	63,5 - 7,92 2.50" - .25"			92-120		
7	John Deere #AM102401, #AM38314 #M80783, #M141786		63,4 24-31/32"	23 29/32"	-	-	63,5 - 6,3 2.50" - .25"	183 / 72"		396-775	x3	
8	John Deere #EPC201693, M141669		63,5 25"	22,2 7/8"	-	-	76,5- 6,3 3"-.250"	-		396-743		





											
	MODEL	CM / INCHES	MM / INCHES			CM / INCHES	INFO		REQUIRED		
JONSERED ↔ AYP, HUSQV.											
Jonsered #532-126338	Jonsered LR8, Partner 890, 1090, 1290	46,2 18-13/64"	9,5 3/8"	-	-	57,1 - 4,7 2.25" - .187"	92/36"			x2	69-242-0  69-258-0
KLIPPO											
Klippo #60.00		47,5 18-3/4"	14,5 9/16"	-	-	57 - 3,9 2.25" - .150"			90-804		69-264-0(G)
Klippo #60.04	Combi G7 21" (53,3cm), G7 21" (53,3cm)	52,8 20-13/16"	14,5 9/16"	-	-	57 - 3,9 2.25" - .150"			90-805		
Klippo #60.04	Combi G7 21" (53,3cm), G7 21" (53,3cm)	52,8 20-13/16"	14,5 9/16"	-	-	57 - 3,9 2.25" - .150"					69-266-0 
KUBOTA ↔ WOODS											
Kubota #76500-34330	RC48G	42,3 16-11/16"	18,2 23/32"	-	-	50 - 5 2" - .20"	122 / 48"			x3	69-249-0
Kubota #76505-11550 #76500-34330	RC48-F19, RC48-G20F(S) RC48-C20F(S)	42,3 16-11/16"	18 .710"	-	-	50 - 6 2" - .24"	122 / 48"			x3	69-252-0
Kubota #76539-34330		52,2 20-9/16"	28,5 1-1/8"	-	-	60 - 7 2-3/8" - .28"	153 / 60"		P624752200103	x3	
Kubota #76539-34330		52,2 20-9/16"	28,5 1-1/8"	-	-	63,5 - 6,3 2.50" - .250"	153 / 60"		396-787	x3	
Kubota #70000-25002 #70000-25013 #70000-25030 #76553-34330 #K5676-97520 #K5677-34340		62,2 24-1/2"	28,6 1-1/8"	-	-	76,2 - 6,4 3" - .250"			396-814		





											
	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO		REQUIRED	
MOUNTFIELD (COOPER, MASCOT)											
Mountfield #M2868	Emblem	37,9 14-59/64"	16 .630"	6,5 .260"	70 2-3/4"	50 - 3 2" - .125"	38 / 15"				69-250-0
Mountfield #M4609	Empress	40,5 15-61/64"	16 .630"	7 .275"	70 2-3/4"	50,8 - 3 2" - .125"		7			69-239-0 4 69-251-0
Mountfield #041300/0, #90800114		46 18"	16 5/8"	8 5/16"	65 2 - 1/2"	55 - 4 2-3/16" - .16"					69-263-0 4 69-253-0
MTD											
MTD #742-04053A		45,4 17-7/8"	15,8 star 5/8"star	-	-	63,5 - 4,7 2-1/2" - 3/16"	127 / 50"		91-938		
MTD #742-0638	46SP, 465P, 9915PN	45,5 18"	bow-tie	8 5-16"	65 2-1/2"	57 - 3 2-1/4" - 1/8"					69-242-0 4 69-258-0
MTD #742-0738		45,7 18"	bow-tie	8 5-16"	63,5 2-1/2"	57 - 3 2-1/4" - 1/8"					69-263-0
MTD #742-0496		46,4 18-9/32"	10,3 13/32"	7,9 5/16"	63,5 2-1/2"	76 - 3,7 3" - .15"	92 / 36"			x2	69-242-0 4 69-258-0
MTD #742-0122	476, 487, 490, 493, 494, 495, 496, 497, 497F,497P,498, 628, 698, 720, 760, 765, S/D,138-495A, 138-497A, W7- BG-497B	48,2 19"	10,3 13/32"	7,9 5/16"	63,5 2-1/2"	50 - 3,5 2" - 1/8"	96,5 / 38"	7		x2	69-264-0 4 69-254-0
MTD #742-0610		49 19-5/16"	16 star 5/8" star	7,9 5/16"	63,5 2-1/2"	70 - 3,7 2-3/4" - .15"			P630449000101		
MTD #942-0610		49 19-5/16"	16 star 5/8" star	7,9 5/16"	63,5 2-1/2"	76,2 - 3,9 3" - .149	96,5 / 38"		198-052	x2	





												
		MODEL	CM / INCHES		MM / INCHES			CM / INCHES	INFO		REQUIRED	
1	MTD #742-0610		49 19-5/16"	16 star 5/8" star	7,9 5/16"	63,5 2-1/2"	76,2 - 3,5 3" - .155"	96,5 / 38"		98-628	x2	
2	MTD #942-0740		50,7 19-63/64"	bow-tie	7,5 19/64"	63,5 2-1/2"	57,1 - 3,5 2.25" - .134"	51 / 20"	4			69-265-0 4
3	MTD #742-0640, #942-0640	1997 ->	50,7 19-63/64"	bow-tie	7,5 19/64"	63,5 2-1/2"	57 - 3,5 2-1/4" - .14"	51 / 20"	7			69-265-0 4 69-255-0
4	MTD #742-0620		50,8 19-31/32"	21 .830"	9,9 25/64"	63,5 2-1/2"	57,1 - 3,5 2.25" - .134"	51 / 20"		98-001		
5	MTD # 742-0616		53,8 21-3/16"	15,8 star 5/8" star	8 5/16"	63,5 2-1/2"	70 - 3,7 2-3/4" - .15"			P630453800102		
6	MTD #742-0616		53,8 21-3/16"	15,8 star 5/8" star	8 5/16"	63,5 2-1/2"	76 - 3,8 3.00" - .149"	107 / 42"		98-629	x2	
7	MTD #742-0499, #742-0538		53,8 21-3/16"	10,3 13/32"	7,9 5/16"	63,5 2-1/2"	76,2 - 3,9 3.00" - .149"	107 / 42"			x2	69-245-0 4
8	MTD #742-04087, MTD #942-04087	125/96L - B135 - LF125 - LF125H - LF130 - FL155 - FL155T - P155HF - RS115/96B -RS120/96 - RS125/96 - RS125/96B - Mastercut 96	53,8 21-3/16"	15,8 6 star	-	-	76,2 - 3,9 3.00" - .149"	-		198-153	x2	
MURRAY (YARD KING)												
9	Murray #92003E701, #92003HT		49,3 19-7/16"	21,5 27/32"	-	-	57,1-3,1 2.25"- .120"	96,5 / 38"	7	97-010	x2	
10	Murray #20045, #42785HT		50 19-5/8"	10,5 7/16"	10,5 7/16"	63,75	57 - 4 2-1/4" - .16"	51 / 20"				69-243-0 4 69-259-0





											
	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO		REQUIRED	
PARTNER <)-> AYP, HUSVARNA											
Partner #532145106	Partner 150, 150H, 150D	50,8 20"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	57 - 3,5 2-1/4" - .14"	51 / 20"	④			69-265-0 ④
PUBERT											
Pubert #13987		50,7 20"	30,5 1-3/16"	-	-	63,5-53 2.5"- .203"			90-411		
Pubert #13988		52 20-1/2"	30,5 1-3/16"	-	-	63,5-53 2.5"- .203"			90-396		
RANSOMES BOBCAT											
Ransomes #32022HD		45,7 18"	15,8 5/8"	6,3 1/4"	41,2 1-5/8"	63,5 - 6,3 2.50"- .250"	92 / 36" 137 / 54"	⑩		x2 x3	69-242-0 ④ 69-258-0
Bobcat #32022HD Ransomes #32022		45,7 18"	15,8 5/8"	-	-	63,5 - 5,1 2.50"- .203"	92 / 36" 137 / 54"		96-344	x2 x3	69-242-0 ④
Bobcat #32022HD, #32022		45,7 18"	15,8 5/8"	-	-	63,5 - 6,3 2.50"- .250"	92 / 36" 137 / 54"		396-726	x2 x3	
Ransomes #42180B		53,3 21"	15,8 5/8"	-	-	63,5 - 5,1 2.50"- .203"	155 / 61"		96-347	x3	69-245-0 ④
Bobcat #42180B		53,3 21"	15,8 5/8"	-	-	63,5 - 6,3 2.50"- .250"	155 / 61"		396-727	x3	
Ransomes #112243-03	HA6010, HT3806, 851	53,3 21"	15,8 5/8"	-	-	63,5 - 6,3 2.50"- .250"	155 / 61"			x3	69-266-0 ④ 69-256-0
Bobcat #112111-03 Ransomes #112243-03	HA6010, HT3806, 851	53,3 21"	15,8 5/8"	-	-	63,5 - 6,3 2.50"- .250"	155 / 61"		396-702	x3	
Ransomes #42139B		63,5 25"	15,8 5/8"	-	-	63,5-6,3 2.50"- .250"	188 / 74"		396-731	x3	





												
		MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO		REQUIRED	
SCAG												
1	Scag #A48110		41,9 16-1/2"	15,8 5/8"	10 31/32"	102 4"	63,5 - 5,1 2.50"- .203"	82 / 32" 122 / 48"			x2 x3	69-241-0 ④ 69-249-0
2	Scag #A48110, #A48184		41,9 16-1/2"	15,8 5/8"	-	-	63,5 - 5,1 2.50"- .203"	82 / 32" 122 / 48"		96-308	x2 x3	69-241-0 ④
3	Scag #A48184, #A48110		41,9 16-1/2"	15,8 5/8"	-	-	63,5 - 6,3 2.50"- .250"	82 / 32" 122 / 48"		396-735	x2 x3	
4	Scag #48108		45,7 18"	15,8 5/8"	10 31/32"	102 4"	63,5 - 5 2.50"- .203"	92 / 36" 132 / 52"			x2 x3	69-242-0 ④ 69-258-0
5	Scag #A48185		45,7 18"	15,8 5/8"	-	-	76,2 - 5,1 3.00"- .203"	92 / 36" 132 / 52"	⑦		x1 x2	69-242-0 ④ 69-258-0
6	Scag #48108 /A48108 #48185		45,7 18"	15,8 5/8"	-	-	63,5 - 5,1 2.50"- .203"	92 / 36" 132 / 52"		96-344	x2 x3	69-242-0 ④
7	Scag #48185, #48108 #482467		45,7 18"	15,8 5/8"	-	-	63,5 - 6,3 2.50"- .250"	92 / 36" 132 / 52"		396-726	x2 x3	
8	Scag #A48111		53,3 21	15,8 5/8	-	-	63,5 - 5,1 2.50"- .203"	155 / 61"			x3	69-245-0 ④ 69-261-0
9	Scag #A48111		53,3 21	15,8 5/8	-	-	63,5 - 5,1 2.50"- .203"	155 / 61"		96-347	x3	
10	Scag #A48111		53,3 21	15,8 5/8	-	-	63,5-6,3 2.50"- .250"	155 / 61"		396-727	x3	
11	Scag #A48304		53,3 21	15,8 5/8	-	-	76,2-5,1 3.00"- .203"	155 / 61"	⑦		x3	69-245-0 ④ 69-261-0





												
	MODEL	CM / INCHES	MM / INCHES	MM / INCHES	MM / INCHES	MM / INCHES	CM / INCHES	CM / INCHES	INFO		REQUIRED	
SENTAR												
1	Sentar #71440002	42 16-1/2"	15,8 5/8"	10 31/32"	102 4"	63,5 - 5,1 2,5" - .203"	122 / 48"				x3	69-241-0 ① 69-249-0
2	Sentar #71440002	42 16-1/2"	15,8 5/8"	-	-	63,5 - 5,1 2,5" - .203"	122 / 48"			396-735	x3	
3	Sentar #71440001	45,7 18"	15,8 5/8"	10 31/32"	102 4"	63,5 - 5 2.50"-.203"	132 / 52"				x3	69-242-0 ① 69-258-0
4	Sentar #71440001	45,7 18"	15,8 5/8"	-	-	63,5 - 5,1 2,5" - .203"	132 / 52"			96-344	x3	69-242-0 ①
5	Sentar #71440001	45,7 18"	15,8 5/8"	-	-	63,5 - 5,1 2,5" - .203"	132 / 52"			396-726	x3	
6	Sentar #71440003	53,40 21"	15,8 5/8"	-	-	63,5 - 5,1 2,5" - .203"	155 / 61"				x3	69-245-0 ① 69-261-0
7	Sentar #71440003	53,40 21"	15,8 5/8"	-	-	63,5 - 5,1 2,5" - .203"	155 / 61"			396-727	x3	
SIMPLICITY												
8	Simplicity# 17081, 5104045SYP, 7017081, 7073396,7073396YP, 7075770, 7075770BMA, 7075770BZ, 7075770YP, 75770	53,3 21"	15,8 5/8"	-	-	63,5 - 5,1 2.50"-.203"	-			91-308	x3	
9	Simplicity #1737816 1737816BM, 1737816BMA 1737816BMYP, 1737816BZ 1737816SM, 1737816YP	53,8 21"-3/16"	20,6 13/16"	-	-	57,5 - 3,7 2.25"-.149"	-			91-605	x2	
SNAPPER												
10	Snapper #1-7043	41,9 16-1/2"	15,8 5/8"	-	-	63,5 - 5,1 2.50"-.203"	81 / 32" 122 / 48"			96-308	x2 x3	69-241-0 ①
11	Snapper #1-7043	41,9 16-1/2"	15,8 5/8"	-	-	63,5 - 6,3 2.50"-.250"	81 / 32" 122 / 48"			396-735	x2 x3	
12	Snapper #7-7344, #7-7037	Series 2, Pro Series 0, Pro 7 series 0, 1, 2, 4	45,7 18"	15,8 5/8"	-	-	63,5 - 6,3 2.50"-.250"	92 / 36" 132 / 52"	⑩		x2 x3	69-242-0 ① 69-258-0






												
		MODEL	CM / INCHES	MM / INCHES			CM / INCHES		INFO		REQUIRED	
1	Snapper #7-7344		45,7 18"	15,8 5/8"	6,3 1/4"	41,2 1-5/8"	63,5 - 6,3 2.50"- .250"	92 / 36" 132 / 52"			x2 x3	69-242-0  69-258-0
2	Snapper #1-7037		45,7 18"	15,8 5/8"	-	-	63,5 - 5,1 2.50"- .203"	92 / 36" 132 / 52"		96-344	x2 x3	69-242-0 
3	Snapper #1-7037		45,7 18"	15,8 5/8"	-	-	63,5 - 6,3 2.50"- .250"	92 / 36" 132 / 52"		396-726	x2 x3	
4	Snapper #1-9702, #1-9710		52,5 20-11/16"	9,5 3/8"	9,5 3/8"	69,8 2-3/4"	69,8 - 4,3 2.75"- .164"	53 / 21"		99-103		
5	Snapper #1-9515, #1-6980		71,1 28"	27 1-1/16"	14,2 9/16"	190,5 7-1/2"	70 - 5,1 2.75"- .187"	72 / 28"		96-628		
6	Snapper # 17081 #5104045SYP #7017081 #7073396 #7073396YP #7075770 #7075770BMA #7075770BZ #7075770YP #75770		53,3 21"	15,8 5/8"	-	-	63,5 - 5,1 2.50" - .203"	-		91-308	x3	
7	Snapper #1737816, #1737816BM #1737816BMA #1737816BMYP #1737816BZ #1737816SM #1737816YP		53,8 21"-3/16"	20,6 13/16"	-	-	57,5 - 3,7 2.25"- .149"	-		91-605	x2	
STIGA												
8	Stiga #1134-0628-01	Stiga Trac	43,1 16-31/32"	9,5 3/8"	9,5 3/8"	69,8 2-3/4"	50,7 - 4,7 2.00"- .188"					69-241-0  69-249-0
TORO & WHEEL HORSE												
9	Toro #116-6358-03, #116-6358-S, #120-9500-03	22200 Turfmaster	39,05 15-3/8"	15,8 5/8"	7,9 5/16"	31,7 1-1/4"	76,2 - 3,40 3.00" - .134"	-		594-601	x2	





												
		MODEL	CM / INCHES	MM / INCHES			CM / INCHES				REQUIRED	
1	Toro #44-5480, #27-0990		45,7 18"	12,7 1/2"	-	-	63,5 - 4,7 2.50"-187"	92 / 36" 132 / 52"		94-018	x2 x3	69-263-0 ④ 69-253-0
2	Toro #44-5480, #27-0990	Groundsmaster	45.7 18"	12,7 1/2"	-	-	63.5 - 6.3 2.50"-250"	92 / 36" 132 / 52"		94-618	x2 x3	
3	Toro #56-2390		45.7 18"	12,7 1/2"	-	-	63,5 - 4,7 2.50"-187"	92 / 36" 132 / 52"			x2 x3	69-263-0 ④ 69-253-0
4	Toro #86-0010	455D	48,2 19"	12,7 1/2"	-	-	63,5 - 6,3 2.50"-250"	340 / 132"		96-701	x7	
5	Toro #79-3060	Recycler	49 19-5/16"	15,8 5/8"	-	-	63,5-4,7 2.50"-187"	96,5 / 38"	④		x2	69-264-0 ④ 69-254-0
6	Toro #57-4700		49 19-5/16"	15,8 5/8"	-	-	63,5-4,7 2.50"-187"	96,5 / 38"			x2	69-264-0 ④ 69-254-0
7	Toro #79-3060		49 19-5/16"	15,8 5/8"	-	-	63,5-4,7 2.50"-187"	96,5 / 38"			x2	69-264-0 ④
8	Toro-Wheelhorse #93-4106-03		53 20-7/8"	12,7 1/2"	10 3/8"	62 2-7/16"	57 - 3,8 2,1/4" - ,149"	53 / 21"				69-245-0 ④ 69-261-0
9	Toro #92-5608	Recycler	55 21-11/16"	12,7 1/2"	-	-	63,5 - 6,3 2.50"-250"	158 / 62"		94-045	x3	69-267-0 ④ 69-257-0
10	Toro #92-5608	Recycler	55 21-11/16"	12,7 1/2"	-	-	63,5 - 6,3 2.50"-250"	158 / 62"		96-708	x3	69-267-0 ④
11	Toro #110-0621-03	Groundsmaster 3280-D3320	62,2 24-1/2"	12,7 1/2"	-	-	63,5 - 6,4 2-1/2" - .250"			94-074		
12	Toro #57-0250	Groundsmaster	62,8 24-3/4"	12,7 1/2"	-	-	63.5 - 6.3 2-1/2" - .250"	183 / 72"		96-724	x3	



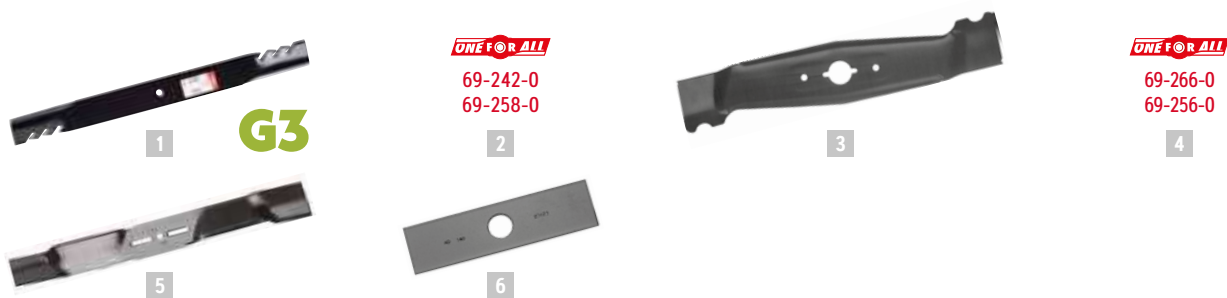

												
		MODEL	CM / INCHES	MM / INCHES			CM / INCHES	INFO			REQUIRED	ONE FOR ALL
1	Toro #107-0235-03		68,5 27"	12,7 1/2"	-	-	63,5 - 6,4 2-1/2" - .250"			96-741		
WESTWOOD												
2	Westwood #4943	Standard	46 1800	10 3/8"	8 5/16"	50 2"	65 - 4 2 1/2" - 5/32"	92 / 36"			x2	69-242-0 4 69-258-0
WOLF												
3	Wolf #171046/7340 Husqvarna #5164934-04 #5310050-27	1992 ->, PVT, PH-TF	46 18-7/64"	32,2 1.27"	8,8 .350"	100 3-15/16"	88,9 - 3 3.50"-.120"			90-816		
WOODS												
4	Woods #70134		53,3 21"	12,7 1/2"	-	-	63,5 - 6,3 2.50"-.250"	155 / 61"			x3	69-266-0 4 69-256-0
UNIVERSAL - MULCHING BLADES												
5			52,7 21	9,5 3/8"			57,1 - 3,8 2.25"-.149"			90-621		
EDGER BLADE												
6		Echo #720237-001 Shindaiwa #72950-92110	20,3 8"	25,4 1"	-	-	5,1 2"	-	-	40-141		



OEM BLADES CROSS REFERENCES

					
	STANDARD	 PREMIUM	GATOR®	STRAIGHT	GATOR®
ALKO					
328531				69-253-0	69-243-0
332039	P621546000301				
343120				69-258-0	69-242-0
513519				69-247-0	
513520				69-258-0	69-242-0
513621				69-258-0	69-242-0
530979				69-258-0	69-242-0
531438				69-258-0	69-242-0
ANTONIO CARRARO					
59009200	91-141		96-605 G3	69-255-0	69-265-0
Rondo 1500	91-141		96-605 G3	69-255-0	69-265-0
AYP					
120262X				69-258-0	69-242-0
121263				69-258-0	69-242-0
121263X				69-259-0	69-243-0
126338X				69-258-0	69-242-0
127841	05460B				
127842	05490B				
127842			95-601 G3		
127843	05535B				
127843	195-048				
127843	05535B				
134148	05490MB				
134148	05490MB				
134148X			95-601 G3		
134149	05535MB				
134768					69-267-0
138496	05460B				
138497	95-038				
138497	95-038				
138498	05535B	195-039			
138498			96-900 G3 496-900 G3 Fusion		
138498	05535B				
138971			96-900 G3 496-900 G3 Fusion		
139744			95-601 G3		
139774			95-601 G3		
141114					69-246-0
141114					69-267-0

					
	STANDARD	PREMIUM	GATOR®	STRAIGHT	GATOR®
145106					69-265-0
157101					69-267-0
159267					69-266-0
168721	P635854300901				
168721	P635854300901				
175064				69-255-0	69-266-0
175451	P635854300901				
175451	P635854300901				
180584	P635854300901				
180584	P635854300901				
192682				69-262-0	69-246-0
24692			95-601 G3		
25744					69-244-0
406713				69-262-0	69-246-0
532127841	05460B				
532134148			95-601 G3		
532139774			95-601 G3		
69334				69-262-0	69-246-0
752234					69-246-0
850972				69-260-0	69-244-0
850973				69-262-0	69-246-0
850973					69-267-0
850973					69-246-0
BOBCAT					
112111-03			396-702 G6		
32022HD			96-344 G3 396-726 G6	69-258-0	69-242-0
BOLENS					
1738571				69-249-0	69-241-0
BUNTON					
PC005	96-347				69-245-0
PL4055			396-735 G6		
PL4205	96-308		396-735 G6		
PL4206			96-344 G3 396-726 G6	69-258-0	69-242-0
PL4855	96-308				69-241-0
CARONI					
59009200	91-141		96-605 G3	69-255-0	69-265-0
71001000			396-707 G6		

OEM BLADES CROSS REFERENCES

					
	STANDARD	 PREMIUM	GATOR®	STRAIGHT	GATOR®
CASTELGARDEN					
81004126/0				69-259-0	69-243-0
81004341/0				69-248-0	69-239-0
81004346				69-253-0	69-263-0
81004360/1					69-248-0
81004365					69-241-0
81004365/1					69-252-0
81004366				69-254-0	69-243-0
81004366/2				69-254-0	69-243-0
81004381/1				69-260-0	69-244-0
81004385				69-258-0	69-242-0
81004395/1				69-254-0	69-264-0
81004397/0				69-253-0	69-263-0
82004340/0	55520RB	91-958			
82004341/0	55520LB	91-959			
82004347/0	55520RMB				
82004354/0	40461LMB				
81004396				69-248-0	69-239-0
81004398				69-255-0	
CUB CADET					
742-04053A			91-938 G3		
DALOZ					
4453	P621352800101				
DIXON					
539119871			396-740 G6		
8688				69-247-0	
9258					69-241-0
9265					69-241-0
9383			396-740 G6		
9403					69-241-0
9433					69-241-0
EFCO					
8203141	P6297520001				
66030201B				69-258-0	69-242-0
66040017B				69-258-0	69-242-0
EMAK					
66030201B				69-258-0	69-242-0
66040017B				69-258-0	69-242-0

					
	STANDARD	 PREMIUM	GATOR®	 STRAIGHT	GATOR®
EXMARK					
303146			96-344 G3		69-242-0
303146			96-344 G3 396-726 G6		69-242-0
303283			96-344 G3		
303495					69-263-0
303527			96-344 G3		
633483			396-740 G6		
663482			96-344 G3		
663484			96-344 G3		
663485			96-344 G3		
GRANJA					
041300/0				69-253-0	69-263-0
GRASSHOPPER					
320236			96-329 G3	69-253-0	69-263-0
320242			396-712 G6	69-256-0	69-266-0
320242			396-712 G6		
320243			396-712 G6		
GRAVELY					
25124			396-740 G6		
46998					69-241-0
GREAT DANE					
D18036			96-347 G3 396-727 G6		
D18037			96-344 G3 396-726 G6	69-258-0	69-242-0
HAYTER					
201026				69-248-0	69-239-0
4013	91-893			69-259-0	69-243-0
40130				69-259-0	69-243-0
HONDA					
72511-VE1-650	66535B				
72511-VE1-651	66535B				
72511-VE1-652	66535B				
CG81004397H0				69-253-0	69-263-0
CG82004340/00	55520RB				
CG82004341/0	55520LB				

OEM BLADES CROSS REFERENCES

					
	STANDARD	PREMIUM	GATOR®	STRAIGHT	GATOR®
HUSQVARNA					
127842			95-601 G3		
134149	05535MB				
138496	95-026				
173920			596-615 G5		
5041878			95-081 G3		
5041882-01	94-083				
5055445	P621035900101				
5065518-01	10300B				
506-6687-01	10300B				
5066765-01	10300B				
506-8852-01					69-241-0
5164438-00					69-263-0
5164934-04	90-816				
516-4943-04				69-256-0	69-266-0
530127-84			95-601 G3		
531-0050-09					69-241-0
5310050-11	10300B				
5310050-27	90-816				
5310050-40					69-263-0
5321212-63			95-601 G3	69-259-0	69-243-0
5321263-38		95-026			
5321278-41	05460B	95-026			
5321278-42	05490B		95-601 G3		
5321278-43	05535B		96-900 G3		
5321341-48	05490MB				
5321341-49	05535MB				
5321384-96	05460B	95-026			
5321384-97	05490B		95-601 G3		
5321384-98			96-900 G3		
532145106					69-265-0
5321750-52				69-261-0	69-245-0
532180054			596-615 G5		
5321804-24	P635854300801				
5321993-77	95-065				
5321411-14					69-246-0
5321805-84	P635854300901				
532-8509-72				69-260-0	69-244-0
532-8509-73				69-262-0	69-246-0

					
	STANDARD	PREMIUM	GATOR®	STRAIGHT	GATOR®
5440677-01			95-080 G3		
5441027-01			95-081 G3		
5441030-01	94-083				
ISEKI					
8595-306-002-00				69-252-0	
8654-306-00			396-702 G6	69-256-0	69-266-0
8654-306-011-0			396-702 G6	69-256-0	69-266-0
JACOBSEN					
390665			96-344 G3 396-726 G6	69-258-0	69-242-0
392564			396-710 G6		
JT391039			96-696 G3		
JT391040			96-795 G3		
JOHN DEERE					
AM100538			396-734 G6		
AM102401			396-775 G6		
AM104489			96-308 G3 396-735 G6		69-241-0
AM31100				69-248-0	69-239-0
AM38314			396-775 G6		
M127500			96-354 G3		
M139802	91-449			69-257-0	69-267-0
M141786			396-775 G6		
M143520			396-719 G6		
M144935			396-710 G6		
M145969	91-449			69-257-0	69-267-0
M80783			396-775 G6		
M84472				69-254-0	69-264-0
PT8721			96-344 G3 396-726 G6		69-242-0
TCU51118	92-120				
JONSERED					
532-122260				69-258-0	69-242-0
532-126338				69-258-0	69-242-0
532145106					69-265-0
KLIPPO					
60.00			90-804		69-264-0
60,04			90-805		69-266-0

OEM BLADES CROSS REFERENCES

					
	STANDARD	 PREMIUM	GATOR®	STRAIGHT	GATOR®
KUBOTA					
70000-25002			396-814 G6		
70000-25013			396-814 G6		
70000-25030			396-814 G6		
76500-34330				69-249-0	
76505-11550				69-252-0	
76539-34330	P624752200103		396-787 G6		
76553-34330			396-814 G6		
K5676-97520			396-814 G6		
K5677-34340			396-814 G6		
MOUNTFIELD					
M2868				69-250-0	
M4609				69-251-0	69-239-0
MTD					
742-0122				69-254-0	69-264-0
742-04053A			91-938 G3		
742-0496				69-258-0	69-242-0
742-0499					69-245-0
742-0538					69-245-0
742-0610	P630449000101		98-628 G3		69-265-0
742-0616	P630453800102		98-629 G3		
742-0620	98-001				
742-0638				69-258-0	69-242-0
742-0640				69-255-0	69-265-0
742-0641				69-256-0	69-266-0
942-0610	198-052				
942-0640				69-255-0	69-265-0
942-0738					69-263-0
MURRAY					
92003E701	97-010				
92003HT	97-010				
95103E701				69-259-0	69-243-0
OLEO-MAC					
66030201B				69-258-0	69-242-0
66040017B				69-258-0	69-242-0
PARTNER					
532145106					69-265-0
PUBERT					
13987			90-411		
13988			90-396		

					
	STANDARD	PREMIUM	GATOR®	STRAIGHT	GATOR®
RANSOMES					
112243-03				69-256-0	69-266-0
32022			96-344 G3 396-726 G6		69-242-0
42139B			396-731 G6		
42180B			96-347 G3 396-727 G6		69-245-0
ROPER					
134149	05535MB				
SCAG					
48108			96-344 G3 396-726 G6	69-258-0	69-242-0
48185			396-726 G6		
482467			396-726 G6		
A48108			96-344 G3		69-242-0
A48110			96-308 G3 396-735 G6	69-249-0	69-241-0
A48111			96-347 G3 396-727 G6	69-261-0	69-245-0
A48184			96-308 G3 396-735 G6		
A48185			96-344 G3	69-258-0	69-242-0
A48304				69-261-0	69-245-0
SENTAR					
71440001			96-344 G3 396-726 G6	69-258-0	69-242-0
71440002				69-249-0	69-241-0
71440003			396-727 G6	69-261-0	69-245-0
SNAPPER					
1-6980			96-628 G3		
1-7037			96-344 G3 396-726 G6		69-242-0
1-7043			96-308 G3 396-735 G6		69-241-0
1-9515			96-628 G3		
1-9702					
1-9710					
7-7037				69-258-0	69-242-0
7-7344				69-258-0	69-242-0
STIGA					
1134-0628-01				69-249-0	69-241-0

OEM BLADES CROSS REFERENCES

					
	STANDARD	PREMIUM	GATOR®	STRAIGHT	GATOR®
TORO					
107-0235-03			96-741 G3		
110-0621-03					
27-0990	94-018		94-618 G3	69-253-0	69-263-0
44-5480	94-018		94-618 G3	69-253-0	69-263-0
57-0250			96-724 G3		
79-3060				69-254-0	69-264-0
86-0010			96-701 G3		
92-5608	94-045		96-708 G3	69-257-0	69-267-0
93-4106-03				69-261-0	69-245-0
VIKING					
61517020100	55520RB	91-958			
61517020105	55520LB	91-959			
WALKER					
4943				69-258-0	69-242-0
WHEEL HORSE					
93-4106-03				69-261-0	69-245-0
WOLF					
171046/7340	90-816				
WOODS					
70134				69-256-0	69-266-0
YAMAHA					

BLADES BY LENGHT

OREGON											S F
	CM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	
90-284	11,7	4.6"	12,7	1/2"	-	-	-	-	50 - 1.6	1.9" - .063"	-
90-293	15,9	5/8	11,2	7/16"	6,3	1/4"	-	-	70 - 4	2.75" - .157"	-
90-711	17,5	7"	15,9	5/8"	-	-	-	-	50 - 4	2" - 5/32"	-
P624525000101	25	9-13/16"	16,2	5/8"	8,5	5/16"	35	1-3/8"	40 - 2,5	1-9/16" - .10"	S
P622230400101	30	12"	10	0.39"	-	-	-	-	63 - 3,4	2.48" - .130"	F
P6202300001	30	11-13/16"	50	2"	-	-	-	-	40 - 2,5	1-9/16" - .10"	S
P6280300001	30	11-13/16"	20,2	13/16"	10,2	3/8"	40	1-9/16"	45 - 3	1-3/4" - .12"	S
96-349	30,4	11-13/32"	10,2	.404"	8,2	.326"	60,3	2-3/8"	63,5 - 5,1	2.50" - .203"	S
P620830900101	31	12"	17	17/64"	-	-	-	-	50 - 3	2" - 1/8"	S
P628333100101	33	13"	18	0.70"	8,5	5/16"	45	1-3/4"	45 - 2,5	1-3/4" - 1/8"	S
P620833000101	33	13"	18	0.70"	8,5	5/16"	45	1-3/4"	50 - 2,5	19-11/16" - 1/8"	S
89-815	33	13"	15,8	5/8"	7,9	5/16"	35	1-3/8"	39,5 - 3,1	1.55" - .122"	F
P628333000101	33	13"	20	13/16"	10,5	3/8"	52	2"	45 - 2,5	1-3/4" - .10"	F
P6337330001	33	13"	20	13/16"	10,5	3/8"	52	2"	45 - 1,8	1-3/4" - .070"	S
91-931	35	13-3/4"	10,2	.404"	8,2	.326"	60	2-3/8"	57,1 - 4,7	2.25" - .187"	S
10346B	35	13-3/4"	10,2	.404"	8,2	.326"	60,3	2-3/8"	50,8 - 4,1	2.00" - .164"	S
P622935600101	35,6	14"	20	25/32"	6,5	1/4"	70	2-3/4"	50 - 2	2.50" - 5/64"	S
P6211358001	35,8	14-1/16"	10,2	.404"	8,2	.326"	40	1-9/16"	50 - 4	2" - 3/16"	F
P6210364001	36,4	14-5/16"	9,5	3/8"	-	-	-	-	50 - 3,5	2" - .14"	S
91-167	36,8	14-1/2"	17,7	.700"	-	-	-	-	50,8 - 4,7	2.00" - .187"	S
96-303	36,8	14-1/2"	17,7	.700"	-	-	-	-	63,5 - 5,1	2.50" - .203"	S
P620837000101	37	14-1/2"	18	0.70"	8,5	5/16"	45	1-3/4"	50 - 2,5	19-11/16" - 1/8"	S
P6259368001	37	14-9/16"	20,2	13/16"	10,2	3/8"	40	1-9/16"	50 - 3	2" - .12"	S
P621336700101	37,2	1-7/16"	18	11/16"	-	-	-	-	50 - 5	2" - .20"	S
P6213367002	37,2	14-5/8"	18	11/16"	8,5	5/16"	38	1-1/2"	50 - 5	2" - .20"	S
P620937500101	37,5	14-3/4"	19,7	3/4"	9	11/32"	65	2-1/2"	50 - 3	2" - 1/8"	S
P621637500101	37,5	14-3/4"	18	.070"	8,8	.350"	65	2.6"	55 - 3	2.16" - 1/8"	F
P6307376001	37,5	14-13/16"	17,4 star	11/16" star	7,9	5/16"	63,5	2-1/2"	76,2 - 3,0	3.00" - .120"	F
P6209376002	37,6	14-13/16"	19,7	3/4"	12,7 x 20	1/2" x .79"	70	2-3/4"	50 - 3	2" - 1/8"	S
P6307376002	37,6	14-13/16"	10,2	3/8"	8	5/16"	63,5	2-1/2"	76,2 - 3,7	3" - .15"	F
P6217378001	37,8	14-7/8"	22,5 x 26	7/8" x 1"	-	-	-	-	57 - 4	2-1/4" - .16"	S
98-061	37,9	14-29/32"	15,8 star	5/8" star	9,5	3/8"	63,5	2-1/2"	63,5 - 3,8	2.50" - .149"	F
P620937800101	37,9	14-59/64"	16	.630"	6,5	.260"	70	2-3/4"	50 - 3	2" - .125"	S
P622238200101	38	15"	10	0.39"	-	-	-	-	63,5 - 3,5	2.50" - .140"	F
P622238200201	38,1	15"	10	0.39"	10	0.39"	45	1.77"	63 - 3,5	2.48" - .140"	F
90-154	38,1	15"	20	25/32"	7	9/32"	-	-	40 - 3	1-1/2" - 1/8"	S
90-824	38,5	15"	19,7	3/4"	9	11/32"	65	2-1/2"	55 - 3	2-1/8" - 1/8"	S
91-097	38,8	15-9/32"	9,9	.390"	-	-	-	-	50,8 - 4,7	2.00" - .187"	S
P6209388001	38,8	15-1/4"	19	3/4"	10,5	7/16"	52	2-1/16"	50 - 3	2" - .12"	S
P6273390001	38,9	15-11/32"	10	3/8"	10,2	3/8"	102	4"	57 - 5	2.25" - .187"	S
95-607	38,9	15-11/32"	9,5	3/8"	-	-	-	-	57,1 - 4,7	2.25" - .187"	S
P621538600201	38,9	15-3/8"	18	0.70"	7,9	5/16"	65	2-1/2"	50 - 3	2" - 1/8"	S
P621439400101	38,9	15-3/8"	17,4	11/16"	8,5	11/32"	38	1-1/2"	50 - 5	2" - 3/16"	F
P621338600101	38,9	15-11/32"	18,2	23/32"	8,7	11/32"	38,1	1-1/2"	50,8 - 4,7	2.00" - .187"	S
P6285390001	39	15-3/8"	18	0.70"	8,9	3/8"	65	2-1/2"	57 - 3	2-1/4" - 1/8"	F
P630539100102	39	15-11/32"	16,1	5/8"	90	3/8"	80	3-1/8"	57 - 3,5	2-1/4" - 1/8"	S
95-052	39,3	15-1/2"	15,8 star	5/8" star	-	-	-	-	57,1 - 3,9	2.25" - .155"	S
94-026	39,3	15-1/2"	15,8	5/8"	-	-	-	-	63,5 - 4,7	2.50" - .187"	F
94-039	39,3	15-1/2"	15,8	5/8"	-	-	-	-	63,5 - 5,1	2.50" - .203"	F
94-061	39,3	15-1/2"	15,8	5/8"	-	-	-	-	63,5 - 4,7	2.50" - .187"	S
P628240100101	40	15-3/4"	17,4	11/16"	11 x 11,5	7/16" x 29/64"	40	1-1/2"	65 - 3	2.50" - .118"	F
P630540000103	40	15-3/4"	21,5	27/32"	-	-	-	-	57,1 - 3,9	2.25" - .149"	F
97-012	40	15-3/4"	21,5	27/32"	-	-	-	-	63,5 - 4,7	2.25" - .187"	S
91-840	40	15-3/4"	32	1-17/64"	6,8	.270"	86	3.4"	70 - 3,4	2.75" - .134"	F
P6215393002	40	15-1/2"	19	3/4"	-	-	-	-	55 - 4	2-1/8" - 5-32"	S
P6264397001	40,5	15-61/64"	16	.630"	7	.275"	70	2-3/4"	50 - 3,6	1.97" - .142"	F
P621640800101	40,6	16"	18	0.70"	8,8	.350"	65	2-1/2"	60 - 4	2-3/8" - 5/32"	S
P630340300101	40,6	16"	15,8	5/8"	-	-	-	-	57 - 3,4	2.24" - .134"	S
P6213406001	40,6	16"	17,4	11/16"	-	-	-	-	63,5 - 5,1	2.50" - .203"	S
P6259406001	40,8	16-1/16"	18	.710"	8,8	.350"	65	2.6"	55 - 3	2.16" - .120"	S
96-013	40,8	16-1/16"	9,5	3/8"	-	-	-	-	50,8 - 3,4	2.00" - .134"	F
90-325	40,9	16-1/8"	21	13/16"	10	3/8"	88	3-1/2"	76 - 3	3" - .125"	F
P621141000201	40,9	16-1/8"	24	15/16"	7,9	5/16"	48	1-7/8"	50 - 4	2" - 5/32"	F
91-723	40,9	16-1/8"	19	3/4"	10,3	.406"	65	2-9/16"	50,8 - 5,1	2.00" - .203"	F
91-705	40,9	16-1/8"	19	3/4"	10,3	.406"	65	2-9/16"	63,5 - 5,1	2.50" - .203"	S

OREGON											S F
	CM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	
90-229	40,9	16-1/8"	32,5	1-1/4"	-	-	-	-	75 - 3	3" - 1/8"	S
P6217410001	41	16-1/8"	18	0.70"	8,8	.350"	65	2-1/2"	57 - 4	2-1/4" - 5/32"	F
P6209410001	41	16-1/8"	20	13/16"	10,5	3/8"	52	2"	50 - 3	2" - .120"	F
P621141000101	41	16-1/8"	10,1	3/8"	8,3	5/16"	60	2-3/8"	50 - 4	2" - 3/16"	S
P621041000101	41	16-1/8"	10,2	3/8"	8	5/16"	63,5	2-1/2"	50 - 3,5	2" - .14"	S
074088	41,1	16-3/16"	10,3	13/32"	7,9	5/16"	63,5	2-1/2"	76,2 - 3,9	3.00" - .149"	F
396-716	41,2	16-1/4"	15,8	5/8"	-	-	-	-	63,5 - 6,3	2.50" - .250"	S
P6231412001	41,2	16-1/4"	10,3	13/32"	7,9	5/16"	63,5	2-1/2"	76,2 - 4,2	3.00" - .164"	F
98-054	41,2	16-1/4"	6pt.star	6pt.star	7,9	5/16"	63,5	2-1/2"	76,2 - 3,0	3.00" - .120"	F
P6333413002	41,3	16-1/4"	16	5/8"	10	3/8"	102	4"	63,5 - 6	2.50" - .24"	S
P635941300101	41,3	16-1/4"	19,2	3/4"	8	5/16"	63,5	2-1/2"	76,2 - 3	3" - .125"	F
P6239415001	41,4	16-9/32"	26,8	1.05"	8,2	.310"	78	3"	57 - 2,4	2.24" - .096"	F
P630741300101	41,5	16-11/32"	10,3	13/32"	7,9	5/16"	63,5	2-1/2"	76,2 - 3,9	3.00" - .156"	F
P621641500101	41,5	16-5/16"	10	3/8"	8	5/16"	65	2-9/16"	55 - 4	2-3/16" - .16"	F
P6215416001	41,6	16-3/8"	19,7	3/4"	12,7 x 20	1/2"x.79"	70	2-3/4"	55 - 3,4	2.16" - .134"	F
39414B	41,8	16-15/32"	28	1.10"	6 x 8,5	15/64" x 11/32"	50	2"	57 - 2,4	2.24" - .096"	F
P6284419002	41,9	16-1/2"	21	13/16"	6 x 8 & 10	1/4" x 5/16" & 3/8"	88 & 94	3-1/2" & 3-3/4"	74 - 3	2-7/8" - 1/8"	F
90-867	41,9	16-1/2"	19	3/4"	-	-	-	-	50 - 7	2" - .275"	F
P622441900101	41,9	16-1/2"	15,8	5/8"	-	-	-	-	63,5 - 5,1	2.50" - .203"	S
P626141900101	41,9	16-1/2"	16	5/8"	12	1/2"	258	10-3/16"	60 - 3	2-3/8" - .12"	S
91-678	42	16-5"	32	1-1/4"	-	-	-	-	88 - 3,6	3.46" - .142"	F
P6240420002	42	16-1/2"	18,8	3/4"	10,5	7/16"	88	3-1/2"	79 - 3	3-1/8" - .12"	F
P6210420004	42	16.56"	10,1	3/8"	8,3	5/16"	40	1.57"	50 - 4	2" - 3/16"	F
P6216420001	42	16-9/16"	16,3	5/8"	8,2	5/16"	65	2-9/16"	55 - 4	2-3/16" - .16"	F
91-381	42,2	16-5/8"	20,2	51/64"	-	-	-	-	63,5 - 5,1	2.50" - .203"	F
91-401	42,2	16-5/8"	20,2	51/64"	-	-	-	-	63,5 - 5,1	2.50" - .203"	F
396-732	42,2	16-5/8"	20,2	51/64"	-	-	-	-	63,5 - 6,3	2.50" - .250"	F
90-279	42,2	16-39/64"	18,3	23/32"	-	-	-	-	64,5 - 6,3	2.53" - .236"	S
90-278	42,2	16-39/64"	18,3	23/32"	-	-	-	-	64,5 - 6,3	2.53" - .236"	S
95-068	42,3	16-11/16"	15.8 star	5/8" star	-	-	-	-	63,5 - 5,1	2.5 - 0.203	F
P621442700101	42,3	16-11/16"	18	.710"	-	-	-	-	50,8 - 6,3	2.00" - .250"	F
P621342000101	42,3	16-11/16"	18,2	23/32"	-	-	-	-	50,8 - 5,1	2.00" - .203"	S
P6218423001	42,5	16-3/4"	8,3	5/16"	-	-	-	-	60 - 3	2-3/8" - 1/8"	S
P6266420003	42,5	16-47/64"	23	53/64"	10	25/64"	95	3-3/4"	82 - 2,6	3.22" - .102"	S
90-862	42,5	16-3/4"	9/16"	-	-	-	-	-	50 - 4	2" - .157"	F
91-703	42,5	16-3/4"	25,4	1"	-	-	-	-	63,5 - 5,1	2.50" - .203"	F
94-803	42,5	16-47/64"	32	1.26"	-	-	-	-	69 - 5,5	2.71" - .216"	S
P624042600101	42,6	16-8"	32	1-1/4"	-	-	-	-	60 - 3,4	2.37" - .134"	S
96-615	42,8	16-7/8"	15,8 star	5/8" star	-	-	-	-	65 - 5,2	2.50" - .203"	S
96-603	42,8	16-7/8"	19	3/4"	-	-	-	-	63,5 - 6,3	2.50" - .250"	F
P621642700101	42,8	16-7/8"	14,5	9/16"	-	-	-	-	60 - 6	2-3/8" - 1/4"	F
P621642700201	42,8	16-7/8"	20,5	13/16"	-	-	-	-	60 - 6	2-3/8" - 1/4"	F
P6339430001	43	16-15/16"	10	3/8"	8,1	5/16"	65	2-9/16"	58 - 4	2-1/4" - .16"	S
91-096	43,1	16-31/32"	9,5	3/8"	9,5	3/8"	69,8	2-3/4"	50,8 - 4,7	2.00" - .187"	S
96-323	43,1	17"	15,8	5/8"	-	-	-	-	63,5 - 5,1	2.50" - .203"	S
90-669	43,1	17"	17,4	11/16"	-	-	-	-	63,5 - 4,7	2.50" - .187"	S
92-675	43,1	17"	17,4	11/16"	10,3	13/32"	85	3-11/16"	63,5 - 5,2	2-1/2" - .203"	S
90-348	43,1	17"	20	13/16"	-	-	-	-	63,5 - 6	2-1/2" - 1/4"	S
91-673	43,1	17"	32	1-1/4"	-	-	-	-	96 - 3,8	3.66" - .150"	F
592-616	43,2	17"	7pt.star	7pt.star	-	-	-	-	76,2 - 4,2	3" - .164"	F
91-445	43,4	17-1/16"	20,6	13/16"	-	-	-	-	63,5 - 5,1	2.50" - .203"	S
396-770	43,4	17-1/16"	15,8	45876	-	-	-	-	76,2 - 6,3	3 - 0.250	S
P6285440001	43,5	17-1/8"	18	0.70"	8,5	.335"	65	2-9/16"	64 - 4,2	2-1/2" - .160"	F
P6216436001	43,5	17-1/8"	18	0.70"	8,8	.350"	65	2-1/2"	55 - 3	2.16" - 1/8"	F
P6215436001	43,5	17-1/8"	18	0.70"	8,8	.350"	65	2-1/2"	55 - 3	2.16" - 1/8"	S
396-738	43,6	17-3/16"	17,4	11/16"	-	-	-	-	63,5 - 6,3	2.50" - .250"	S
96-676	43,7	17-3/16"	10	.394"	-	-	-	-	63,5 - 5,2	2.50" - .204"	S
P6285438001	43,8	17.24"	9,6	.38"	10,4	13/32"	52	2	57 - 3	2.16" - .11"	S
P6210439001	43,9	17-1/4"	10,5	7/16"	8,5	5/16"	63,7	2-1/2"	50 - 3,5	2" - 1/8"	S
P625243500101	44	17"	33	1 1/4"	-	-	-	-	70 - 4	2.3/4" - 5/32"	S
16445B	44,9	17-46/64"	18	0.70"	8,8	.350"	65	2.6	55 - 4	2.16" - .157"	S
P625244800101	45	17-3/4"	28	1-1/8"	-	-	-	-	55 - 3	2-1/8" - 1/8"	F
P627245300102	45	17-23/32"	16	.630"	7	.275"	70	2-3/4"	73 - 3,3	2.87" - .130"	F
P622045400101	45	17.7"	12,5	1/2"	8,5	.335"	40	1.57"	60 - 5	2-11/32" - .203"	S
P632245100101	45	17-23/32"	32	1-17/64"	6,8	.270"	86	3.4"	70 - 3,2	2.75" - .126"	F

BLADES BY LENGHT

OREGON											S F
	CM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	
P6215452002	45	17-3/4"	19	3/4"	-	-	-	-	55 - 4	2-1/8" - 5-32"	S
P637246000101	45,5	18"	10	3/8"	7,9	5/16"	65	2-1/2"	50 - 4	2" - 5/32"	S
P637246000201	45,5	18"	21	13/16"	10,5	3/8"	52	2"	50 - 4	2" - 5/32"	S
91-558	45,5	18"	12,7	1/2"	-	-	-	-	63,5 - 6,3	2.5 - 0.250	F
P627945600101	45,5	17-59/64"	10	.394"	8,5	.335"	65	2.6"	76 - 3,9	3.00" - .156"	F
P627245300201	45,5	18"	20	.787"	10,2	.404"	94	3.84"	70 - 2.75"	3 - .125"	S
P6285457003	45,5	18"	bow-tie	bow-tie	7,9	5/16"	65	2-1/2"	52 - 3	2" - 1/8"	S
P6217455001	45,5	17-5/16"	18	0.70"	8,7	.340"	65	2-1/2"	57 - 4	2.24" - 5/32"	F
P621045500103	45,5	18"	10,5	7/16"	8,5	5/16"	63,7	2-1/2"	50 - 3,5	2" - 1/8"	S
P6217452001	45,5	17-15/16"	21,2	13/16"	10,7	.420"	54	2.12"	57 - 4	2.16" - .150"	S
P6266456002	45,6	17-15/16"	32,2	1.27"	9	3/8"	100	3-15/16"	95 - 2,5	3-3/4" - .10"	S
59456B	45,7	17"	18	.710"	8,8	.350"	65	2.6"	55 - 3,4	2.16" - .134"	F
17460MB	45,7	17"	18	0.70"	-	-	-	-	57-4	2.24" - .015"	S
91-218	45,7	18"	15,8	5/8"	-	-	-	-	63,5 - 4,1	2.50" - .164"	F
396-729	45,7	18"	12,7	1/2"	-	-	-	-	63,5 - 6,3	2.50" - .203"	S
93-006	45,7	18"	15,8	5/8"	6,3	1/4"	41,2	1-5/8"	63,5 - 5,1	2.50" - .203"	S
P6285457004	45,7	17-63/64"	bow-tie	bow-tie	7,5	19/64"	63,5	2-1/2"	57,1 - 3,5	2.25" - .134"	F
93-010	45,7	18"	15,8	5/8"	-	-	-	-	63,5 - 5,1	2.50"-.203"	F
P622445700201	45,7	18"	15,8	5/8"	-	-	-	-	63,5 - 5,1	2.50"-.203"	S
91-623	45,7	18"	15,8	5/8"	-	-	-	-	76,2 - 5,1	3.00"-.203"	S
91-184	45,7	18"	15,8	5/8"	-	-	-	-	63,5 - 6,3	2.50" - .250"	S
94-022	45,7	18"	12,7	1/2"	-	-	-	-	63,5 - 4,7	2.50"-.187"	F
596-344	45,7	18"	15,8	5/8"	-	-	-	-	76,2 - 5,1	3" - .203"	S
491-622	45,7	18"	15,8	5/8"	-	-	-	-	63,5 - 5,1	2,5" - .203"	S
P629046000101	46	18"	19,5	3/4"	9	11/32"	65	2-1/2"	55 - 3	2-1/8" - 1/8"	S
P6209476001	46	18"	19,5	3/4"	12,7x20	1/2"x.79"	70	2-3/4"	50 - 3	2" - 1/8"	S
16458B	46	18-7/64"	18	0.70"	8,8	.350"	65	2,6	55 - 4	2.16" - .157"	F
40461LB	46	18-7/64"	18	0.70"	8,8	.350"	65	2,6	55 - 3.3	2.16" - .130"	F
40461RB	46	18-7/64"	18	0.70"	8,8	.350"	65	2,6	55 - 3.3	2.16" - .130"	F
40461LMB	46	18-7/64"	18	0.70"	8,8	.350"	65	2,6	55 - 3.3	2.16" - .130"	F
40461RMB	46	18-7/64"	18	0.70"	8,8	.350"	65	2,6	55 - 3.3	2.16" - .130"	F
P621646000101	46	18"	16	5/8"	8	5/16"	65	2 - 1/2"	55 - 4	2-1/8" - 5/32"	F
P6240460002	46	18"	21	13/16"	10	3/8"	88	3-1/2"	76 - 3	3" - .125"	F
91-875	46	18-3/16"	10	.394"	8,5	.335"	65	2.6"	58 - 3,5	2.26" - .134"	F
05460MB	46	18"	5pt.star	5pt.star	-	-	-	-	57 - 3,5	2-1/4" - 9/64"	S
P628246200101	46	18-7/64"	17,4	11/16"	11 x 11,5	7/16" x 29/64"	40	1-1/2"	65 - 4	2.50" - .157"	F
98-074-0	46	18"	6pt.star	6pt.star	-	-	-	-	71 - 3	.795" - 0.118"	S
98-075-0	46	18"	6pt.star	6pt.star	-	-	-	-	71 - 3	.795" - 0.118"	S
91-706	46	18-9/64"	19	3/4"	10,3	13/32"	65	2-9/16"	50,8 - 5,1	2.00"-.203"	S
90-698	46	18-9/64"	19	3/4"	10,3	13/32"	65	2-9/16"	63,5 - 5,1	2.50"-.203"	S
94-802	46	18-7/64"	32	1.26"	-	-	-	-	68,4 - 5	2.67"-.196"	F
P6222459002	46	18"	10	3/8"	7,9	5/16"	50	2"	65 - 4	2.1/2" - 5/32"	F
P6210459001	46	18-7/64"	-	-	7,9	5/16"	46	1.8"	50,8 - 3,4	2.00"-.134"	F
P6209460002	46	18-1/8"	20	13/16"	10,5	3/8"	52	2"	50 - 3	2" - .120"	F
P6285460001	46	18-7/64"	17	11/16"	12	1/2"	40	1-1/2"	57 - 3	2-1/4" - .12"	S
P6285460002	46	18-1/8"	18	11/16"	8,3	5/16"	45	1-3/4"	57 - 3	2-1/4" - .12"	F
P621646000201	46	18-1/8"	10	3/8"	8	5/16"	65	2-9/16"	55 - 4	2-3/16" - .16"	F
P6339460001	46	18"	16,3	5/8"	8	5/16"	65	2-1/2"	58 - 4	2-1/4" - .16"	F
P6306460001	46	18-1/8"	10	3/8"	9,6	3/8"	101,6	4"	54 - 3,5	2-1/8" - .14"	S
95-034	46,1	18-3/16"	9,5	3/8"	-	-	-	-	57,1 - 4,7	2.25" - .187"	S
95-613	46,1	18-3/16"	15,8 star	5/8" star	-	-	-	-	57,1 - 4,7	2.25" - .187"	F
P6215462002	46,2	18-3/16"	19,5	3/4"	12,7x20	1/2"x.79"	70	2-3/4"	55 - 3	2-1/8" - 1/8"	S
595-613	46,2	18-3/16"	15,8 star	5/8" star	-	-	-	-	76,2 - 4,2	3" - .164"	S
97-105	46,3	18-1/4"	22,2x25,4	7/8x1"	-	-	-	-	57,1 - 3,9	2.25"-.149"	F
P6217462001	46,3	18-1/4"	22,2x25,4	7/8x1"	-	-	-	-	57,1 - 3,9	2.25"-.149"	F
P635846600401	46,4	18,3"	10	.394	45943	1/2" - .394"	85 - 80	3.34" - 3.14"	-4	- .157	S
P635846600301	46,4	18,3"	10	.394	45943	1/2" - .394"	85 - 80	3.34" - 3.14"	-4	- .157	S
P625546601101	46,4	18,3"	5 star	-	13	1/2"	85	3.34"	-4	- .157	S
P625546601201	46,4	18,3"	6 star	-	13	1/2"	85	3.34"	-4	- .157	S
07460B	46,4	18-9/32"	10,3	13/32"	7,9	5/16"	63,5	2-1/2"	76,2 - 3,9	3.00" - .149"	F
P6217461002	46,4	18-17/64"	10	.394"	10	.394"	46	1.8"	57 - 4	2.24"-.157"	F
55465RB	46,5	18-1/4"	5 star	5 star	9	3/8"	80	3-1/8"	57 - 4	2-1/4"-5/32"	F
55465LB	46,5	18-1/4"	6 star	6 star	9	3/8"	80	3-1/8"	57 - 3,8	2-1/4"-.150"	F
17465B	46,5	18-1/4"	25	1"	14,5	9/16"	90	3 - 1/2"	57 - 4	2-1/4" - 5/32"	F

											
	CM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	
P6217465003	46,5	18-5/16"	21	13/16"	10,5	7/16"	88	3-1/2"	57 - 4	2.24" - .16"	S
P6255466003	46,5	18-1/4"	5pt.star	5pt.star	10	3/8"	80	3-1/8"	57 - 3,8	2-1/4" - .150"	S
P6255466004	46,5	18-1/4"	6pt.star	6pt.star	10	3/8"	80	3-1/8"	57 - 3,8	2-1/4" - .150"	S
P6231465001	46,6	18-11/32"	10,3	13/32"	7,9	5/16"	63,5	2-1/2"	76,2 - 3,9	3.00" - .149"	F
P629246700101	46,7	18-3/8"	24	15/16"	14,5	.571"	88	3-1/2"	57 - 4	2.24" - .16"	F
P621046500201	46,8	18-7/16"	19,5	3/4"	8	5/16"	65	2-1/2"	50 - 3,5	2" - 1/8"	F
P621646800101	46,8	18-7/16"	20,4	.800"	10,3	13/32"	40	1-9/16"	55 - 4,2	2.16" - .164"	F
91-674	46,9	18-15/32"	32	1-1/4"	-	-	-	-	88 - 3,6	3.46"-.142"	S
P6217467001	47	18-1/2"	22	.866"	14,5	.571"	88	3.5"	57 - 4,2	2.24" - .164"	F
95-082	47	18-1/2"	5pt.star	5pt.star	-	-	-	-	63,5 - 4,7	2.50" - .187"	S
P628947200101	47	18-1/2"	17,4	11/16"	11 x 11,5	7/16" x 29/64"	40	1-1/2"	63,5 - 3,5	2.50" - .134"	F
98-672	47	18-1/2"	6pt.star	6pt.star	-	-	-	-	76 - 5	3 - 0.203	F
P624048100101	47	18-1/2"	21	13/16"	10,3	13/32"	88	3.5"	55 - 3	2-5/32" - .10"	F
P6252470001	47	1-7/8"	33	1-5/16"	-	-	-	-	80 - 3	3-1/8" - .140"	S
P625147000301	47,2	18-9/16"	16,2	5/8"	8,5	5/16"	35	1-3/8"	57 - 4	2-1/4" - 3/16"	S
91-404	47,3	18-21/32"	20,2	51/64"	-	-	-	-	63,5 - 5,1	2.50" - .203"	F
P6224475001	47,3	18-21/32"	20,2	51/64"	-	-	-	-	63,5 - 5,1	2.50" - .203"	S
396-706	47,3	18-21/32"	20,2	51/64"	-	-	-	-	63,5 - 6,3	2.50" - .250"	F
396-796	47,3	18-5/8"	28,5	1-1/8"	-	-	-	-	63,5 - 6,3	2.50" - .250"	F
P624747500101	47,3	18-5/8"	28,5	1-1/8"	-	-	-	-	63,5 - 6,3	2.50" - .250"	F
592-617	47,3	18-21/32"	7 pt.star	7 pt.star	-	-	-	-	76,2 - 4,2	3" - .164"	F
P6254474001	47,4	1-7/8"	16	5/8"	10	3/8"	69,5	2-3/4"	90 - 3	3-9/16" - .12"	S
P6266468003	47,5	18-11/16"	21,4	.844"	10,4	.410"	88	3.5"	83 - 3,4	3.27" - .134"	F
90-197	47,5	18-3/4"	20,5	13/16"	-	-	-	-	60 - 7	2-3/8" - 9/32"	F
P627947500101	47,5	1-7/8"	10	.394"	8,4	5/16"	65	2.6"	76 - 3	5/16" - .120"	F
P6285475002	47,5	1-7/8"	20	13/16"	11	7/16"	94	3-11/16"	57 - 3	2-1/4" - .120"	S
P6285475001	47,5	1-7/8"	17	11/16"	12	15/32"	40	1-9/16"	57 - 3	2-1/4" - .120"	S
94-070	47,5	18-3/4"	16	5/8"	-	-	-	-	57,2 - 4,2	2-1/4" - .170"	S
17477B	47,6	18-3/4"	21,5	.850"	10,5	.416"	90	3.5"	57 - 4	2.25" - .157"	F
94-804	47,6	18-47/64"	11,5	29/64"	10,2	.400"	62	2.4"	61 - 4,5	2.40"-.177"	F
P6240475004	47,7	18-3/4"	33	1-5/16"	-	-	-	-	63,5 - 3	2-1/2" - .140"	S
P6215476001	47,8	18-13/16"	19,7	3/4"	12,7x20	1/2" x .79"	70	2-3/4"	55 - 3,4	2.16" - .134"	F
P6216476001	48	18-57/64"	18	0.70"	8,8	.350"	65	2.6	55 - 4	2.16" - .157"	F
17479MB	48	18-57/64"	18	0.70"	8,8	.350"	65	2.6	57 - 4	2.24" - .130"	S
55476B	48	18-57/64"	18	0.70"	8,8	.350"	65	2.6	55 - 4,2	2.16" - .170"	F
91-894	48	19"	19	3/4"	15	.590"	95	3-3/4"	63,5 - 3,2	2.50" - .126"	S
P621148000401	48	18-7/8"	24	0.95"	7,9	5/16"	48	1-7/8"	50 - 4	2" - 5/32"	F
90-354	48	18-7/8"	20	13/16"	-	-	-	-	63,5 - 6	2-1/2" - 1/4"	F
P6210481001	48	18-57/64"	18	0.70"	8,8	.350"	65	2-1/2"	50 - 4	2" - 5/32"	S
P6303480002	48	19"	15,8	5/8"	10,5	7/16"	94	3-11/16"	63,5 - 3	2-1/2" - .120"	S
P632248000101	48	18-7/8"	32	1-17/64"	12,3	1/2"	94	3-11/16"	70 - 3	2-3/4" - .12"	S
90-801	48,2	19"	15,8	5/8"	-	-	-	-	63,5 - 3,8	2.50" - .149"	S
P621048000305	48,2	19"	10,3	13/32"	7,9	5/16"	63,5	2-1/2"	50,8 - 3,5	2.00" - .134"	F
P633348000101	48,2	19"	16	5/8"	11	7/16"	70	2-3/4"	63,5 - 6	2-1/2" - 1/4"	F
P621848300101	48,4	19-1/16"	32	1-1/4"	-	-	-	-	60 - 3	2-3/8" - .12"	S
P6227480001	48,5	19-1/16"	18	11/16"	15	9/16"	48	1-7/8"	70 - 4	2-3/4" - 3/16"	S
94-078	48,6	19-1/8"	16,2	5/8"	6,5	1/4"	150	1/4"	55 - 4	2-3/16" - .160"	S
94-080	48,6	19-1/8"	16,2	5/8"	6,5	1/4"	150	1/4"	55 - 4	2-3/16" - .160"	S
95-031	49	19-5/16"	9,5	3/8"	-	-	-	-	57,1 - 4,7	2.25" - .187"	S
17490MB	49	19-1/4"	18	0.70"	8,8	.350"	65	2.6	57 - 4	2.24" - .130"	S
P625248500201	49	19"	33	1 1/4"	-	-	-	-	70 - 4	2 3/4" - 5/32"	S
94-602	49	19-5/16"	15,8	5/8"	-	-	-	-	63,5 - 4,7	2.50"-.187"	F
94-032	49	19-5/16"	15,8	5/8"	-	-	-	-	63,5 - 4,7	2.50"-.187"	F
94-038	49	19-5/16"	15,8	5/8"	-	-	-	-	63,5 - 4,7	2.50"-.187"	F
595-601	49	19-9/32"	15,8 star	5/8" star	-	-	-	-	76,2 - 4,2	3" - .164"	S
P6231490001	49	19-5/16"	10,3	13/32"	8,1	5/16"	63,6	2-1/2"	75 - 4	2-15/16" - .16"	S
07486B	49,2	19-3/8"	9,5	3/8"	7,9	5/16"	63,5	2-1/2"	76,2 - 3,9	3.00" - .149"	F
98-493	49,2	19-3/8"	9,5	3/8"	7,9	5/16"	63,5	2-1/2"	76,2 - 3,9	3.00" - .149"	F
P6273495001	49,3	19-7/16"	21,5	27/32"	-	-	-	-	57,1 - 3,5	2.25"-.134"	F
P630549500202	49,3	19-7/16"	21,5	27/32"	-	-	-	-	57,1 - 4,7	2.25"-.187"	F
91-398	49,5	19-1/2"	17,8	45/64"	-	-	-	-	63,5 - 5,1	2.50" - .203"	F
96-309	49,5	19-1/2"	17,8	45/64"	-	-	-	-	63,5 - 5,1	2.50" - .203"	S
P632649600101	49,5	19-1/2"	17,8	45/64"	-	-	-	-	63,5 - 5,1	2.50" - .203"	F
P634449800101	49,8	19-5/8"	33,1	1-5/16"	10	3/8"	94	3-11/16"	70 - 3,5	2-3/4" - .14"	S
P6236500001	50	19-11/16"	20,2	13/16"	6,5	1/4"	47	1-7/8"	80 - 5	3-1/8" - .20"	S
90-834	50	19-3/4"	18	0.70"	8,8	.350"	65	2.6	60 - 4	2-3/8" - 5/32"	S

BLADES BY LENGHT

											 
	CM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	
P625150500101	50	20"	16	5/8"	-	-	-	-	55 - 3,5	2.16" - .137"	S
P6217502001	50	19-5/8"	10	13/32"	-	-	-	-	57,1 - 3,4	2.25"-.134"	S
96-005	50	19-11/16"	9,5	3/8"	-	-	-	-	50,8 - 3,5	2.00"-.134"	S
06500B	50	19-11/16"	9,5	3/8"	-	-	-	-	50,8 - 3,5	2.00"-.134"	S
15504B	50	19-3/4"	18	0.70"	8,8	.350"	65	2-1/2"	55 - 3	2.16" - .118"	S
P623150200501	50,2	19-3/4"	24,5	15/16"	8,5	11/32"	44	1-3/4"	75 - 4	3" - 5/32"	S
P621950200101	50,2	19-3/4"	24,5	15/16"	8,5	11/32"	100	3-15/16"	60 - 4	2-3/8" - .16"	S
P6285502001	50,2	19-3/4"	17	11/16"	12	1/2"	40	1-1/2"	57 - 3	2-1/4" - .12"	S
17506MB	50,5	19-7/8"	18	0.70"	8,5	.335"	65	2-9/16"	64 - 4,2	2-1/2" - .160"	S
55504B	50,5	19-7/8"	18	0.70"	8,8	.350"	65	2.6"	55 - 4	2.16" - .157"	F
P6217506003	50,5	19-7/8"	21,5	7/8"	10	3/8"	94	3-11/16"	57 - 4	2.24" - 5/32"	F
P621350500101	50,5	19-7/8"	15,2	5/8"	10,2	3/8"	125	4-15/16"	50 - 5	2" - .20"	F
65508B	50,6	19-15/16"	15,8	5/8"	9,5	3/8"	47,6	1-7/8"	63,5 - 4	2.50" - .149"	F
95-041	50,6	19-15/16"	15,8	5/8"	9,5	3/8"	47,6	1-7/8"	63,5 - 3,9	2.50" - .149"	F
P6217508002	50,8	20"	19,5	3/4"	8,3	5/16"	65	2-1/2"	57 - 4	2-1/4" - 3/16"	F
05508MB	50,8	20"	15,8	5/8"	9,5	3/8"	47,6	1-7/8"	57,1 - 3,4	2.25" - .134"	F
P630553300103	50,8	20"	15,8	5/8"	9,5	3/8"	47,6	1-7/8"	57 - 3,5	2-1/4" - .140"	F
98-066	50,8	20"	bow-tie	bow-tie	7,5	19/64"	63,5	2-1/2"	57,1 - 3,5	2.25" - .134"	F
P630550700101	50,8	20"	17,5 x 25,4	11/16" x 1"	7,5	19/64"	63,5	2-1/2"	57,1 - 3,5	2.25" - .134"	F
96-720	50,8	20"	15,8	5/8"	-	-	-	-	63,5 - 5,1	2.50"-.203"	F
P621651000102	50,8	20"	10	3/8"	8	5/16"	65	2-9/16"	55 - 4	2-3/16" - .16"	F
P621050800102	50,8	19-31/32"	10,2	3/8"	7,9	5/16"	63,5	2-1/2"	50 - 3,5	2" - 1/8"	S
P622050900101	50,9	20-1/16"	30,5	1-3/16"	-	-	-	-	60 - 5	2-3/8" - .20"	S
90-187-0	51	20"	10	3/8"	7,9	5/16"	65	2-1/2"	55 - 3	2-1/8" - 1/8"	S
P625251000101	51	20"	32	1 1/4"	-	-	-	-	80 - 3	3.15" - .120"	F
P6272524003	51	20-5/64"	32,2	1.27"	5,1	.200"	42,4	1.6"	88,9 - 3	3.50"-.120"	F
P6217508001	51	20"	16	5/8"	10,3	13/32"	94	3.7"	57 - 4	2.16" - .115"	F
P6227512001	51,2	20-3/16"	18	11/16"	7,2	1/4"	60	2-3/8"	70 - 4	2-3/4" - .16"	F
P6227507001	51,2	20-3/16"	32	1-1/4"	-	-	-	-	70 - 4	3/16" - .16"	S
P621651300101	51,3	20-3/16"	19,5	3/4"	-	-	-	-	55 - 4	2-1/4" - 3/16"	F
94-001	51,4	20-1/4"	11,1	7/16"	-	-	-	-	57,1 - 3,4	2.25"-.134"	F
P6305517002	51,5	20-9/32"	21,4	27/32"	-	-	-	-	57,1 - 3,5	2.25"-.134"	F
06515B	51,5	20-5/16"	9,5	3/8"	9,6	3/8"	101,6	4"	52,5 - 3,5	2-1/16" - .14"	S
97-004	51,6	20-11/32"	21,8	.850"	-	-	-	-	69,8 - 3,4	2.75-.134"	F
P6305518001	51,6	20-11/32"	21,8	.850"	-	-	-	-	69,8 - 3,4	2.75-.134"	F
P6273520001	51,7	20-3/8"	21,8	.850"	-	-	-	-	57,1 - 3,5	2.25"-.134"	F
97-119	51,7	20-3/8"	21,8	.850"	-	-	-	-	57,1 - 4,7	2.25"-.187"	F
97-604	51,7	20-3/8"	21,8	.850"	-	-	-	-	57,1 - 4,7	2.25"-.187"	F
P625552002701	51,9	20-7/16"	18,2	.719"	8,7	11/32"	65	2.6"	55 - 4,6	2.16" - .181"	F
90-233	52	20-15/32"	16,2	41/64"	7	9/32"	73,5	2-29/32"	-	-	S
90-234	52	20-15/32"	16,2	41/64"	7	9/32"	73,5	2-29/32"	-	-	S
90-253	52	20-1/2"	24,6	31/32"	5,2	13/64"	76,2	3"	3,5	.137"	F
P625552002201	52	20-15/32"	16,2	41/64"	10,4	.410"	73,5	2,90625	55 - 3	2.16 - .125"	F
P625552002101	52	20-15/32"	16,2	41/64"	10,4	.410"	73,5	2,90625	55 - 3	2.16 - .125"	F
P631952200101	52	20-1/2"	23,1	.910"	-	-	-	-	63,5 - 7,8	2.50" - .312"	S
P6253520001	52	20-1/2"	32	1-1/4"	-	-	-	-	93 - 3	3.66"-.120"	F
P6249520001	52	20-4"	32	1-1/4"	-	-	-	-	88 - 3	3.46" - .120"	F
P629252000101	52	20-15/32"	38	1-1/2"	-	-	-	-	68 - 4,5	2.67" - .177"	F
P6220518001	52	20-1/2"	25,5	1"	-	-	-	-	60 - 5	2-3/8" - .20"	F
P6297520002	52	20-1/2"	34	1-5/16"	10,2	3/8"	70 - 94	2-3/4" - 3-11/16"	95 - 2,5	3-3/4" - .10"	S
P621351800101	52	20-1/2"	18	11/16"	-	-	-	-	50 - 5	2" - .20"	S
P625552002501	52	20-1/2"	25,2	1"	14,5	9/16"	90	3-9/16"	55 - 4	2-3/16" - .16"	F
P6255520004	52	20-1/2"	10,3	7/16"	8	5/16"	63	2-1/2"	55 - 4	2-3/16" - .16"	S
P6255520003	52	20-1/2"	10	3/8"	8	5/16"	63	2-1/2"	55 - 3,5	2-3/16" - .15"	S
396-739	52	20-1/2"	12,7	1/2"	-	-	-	-	76,2 - 6,3	3" - .250"	S
90-252	52,1	20-1/2"	24,6	31/32"	5,2	13/64"	76,2	3"	3,5	.137"	F
P6308521001	52,2	20-9/16"	9,5	3/8"	-	-	-	-	69,8 - 3,5	2.75" - .134"	F
P624752300101	52,2	20-9/16"	26,8	1-1/8"	-	-	-	-	63,5 - 6,3	2.5 - 0.250	F
491-438	52,2	20-9/16"	28,5	1-1/8"	-	-	-	-	63,5 - 6,3	2.50" - .250"	F
91-983	52,4	20.62"	16,2	41/64"	6,5	1/4"	150	5.9"	4	0.15"	S
91-984	52,4	20-5/8"	16,2	41/64"	6,5	1/4"	150	5.9"	4	0.15"	S
91-756	52,4	20-5/8"	24	.944"	14,4	.570"	87,5	3.4"	57 - 4	2.25 - .157	F
P627252400101	52,5	20-1/2"	16	5/16"	8	5/16"	95	3.74"	70 - 3	2.75" - .125"	S
P627252400202	52,5	20-1/2"	20	.787"	10	.394"	95	3.74"	70 - 3	2.75" - .125"	S
P6227526001	52,5	20-11/16"	9,5	3/8"	9,5	3/8"	69,8	2-3/4"	69,8 - 4,1	2.75"-.164"	F

											 S F
	CM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	
96-620	52,5	20-11/16"	9,5	3/8"	9,5	3/8"	69,8	2-3/4"	70 - 4,1	2.75" - .164"	S
P6257523002	52,5	20-1/2"	21	13/16"	14,5	9/16"	88	3-1/2"	90 - 4	3-1/2" - 5/32"	F
P6217526005	52,5	20-1/2"	21	13/16"	14,5	9/16"	88	3-1/2"	57 - 4	2.25" - .157"	S
P629253000101	52,5	20-1/2"	24	.944"	14,5	9/16"	88	3-1/2"	57 - 4	2.25" - .157"	F
17524B	52,5	20-11/16"	25,2	1"	14,5	9/16"	90	3-9/16"	57 - 4	2-1/4" - .16"	F
P625552500101	52,5	20-11/16"	16	5/8"	8	5/16"	65	2-9/16"	55 - 4	2-3/16" - .16"	F
P621652500101	52,5	20-11/16"	16	5/8"	8	5/16"	65	2-9/16"	55 - 4	2-3/16" - .16"	F
P621752400301	52,6	20-11/16"	20	51/64"	14,6	37/64"	90	3-9/16"	57 - 3,8	2.25" - .149"	F
P621752600301	52,6	20-23/32"	21	13/16"	10,5	.416"	88	3-1/2"	57 - 4	2.25" - .157"	S
P6305526001	52,6	20-11/16"	17	11/16"	12	1/2"	40	1-9/16"	57 - 3,5	2-1/4" - .14"	F
P6217526008	52,8	20-13/16"	21,2	.835"	10,5	.416"	87,7	3.455"	57,1 - 3,8	2.25" - .149"	S
17526B	52,8	20-13/16"	21,2	.835"	10,5	.416"	87,7	3.455"	57,1 - 3,8	2.25" - .149"	S
90-651	52,8	20-13/16"	21,2	.835"	10,5	.416"	87,7	3.455"	57,1 - 3,9	2.25" - .187"	S
490-805	52,8	20-13/16"	14,5	9/16"	-	-	-	-	57 - 3,9	2.25" - .150"	F
P621352800101	52,8	20-13/16"	15,2	5/8"	10,2	3/8"	125	4-15/16"	50 - 5	2" - 3/16"	F
P624752800101	52,9	21-1/16"	20	51/64"	-	-	-	-	60 - 7	2-3/18" - .28"	F
P625252600101	53	20-7/8"	28	1.10"	-	-	-	-	81 - 2,5	3.19" - .098"	F
91-516	53	20-7/8"	21,5	27/32"	10,5	.413"	88	3.5"	57 - 3	2.25" - .120"	S
91-443	53	20-7/8"	23,1	.910"	10,3	.406"	93,6	3-11/16"	69,8 - 3,4	2.75" - .134"	F
17527B	53	20-7/8"	21,5	.850"	10,5	.416"	90	3.5"	57 - 4	2.25" - .157"	F
P627153000101	53	20-7/8"	10,2	13/32"	8,2	.328"	54	2.12"	-	-	S
94-051	53	20-7/8"	12,7	1/2"	10	3/8"	62	2-7/16"	57 - 3,8	2.1/4" - .149"	S
P6217527002	53	20-7/8"	23,1	.910"	10,5	7/16"	93	3-11/16"	57 - 4	2-1/4" - .16"	S
94-086	53	20-7/8"	32	1-1/4"	-	-	-	-	97 - 4	3-13/16" - .160"	S
P6217529001	53	20 - 15/16"	21	27/32"	10,7	.420"	54	2.12"	57 - 4	2.16" - .150"	S
91-796	53,1	20-15/16"	20	0.79"	-	-	-	-	80 - 4,4	3.15" - .173"	F
91-517	53,1	20-15/16"	32	1.25"	10,5	.413"	88	3.5"	65,3 - 3	2.50" - .120"	S
98-002	53,1	20-15/16"	21	27/32"	10,3	13/32"	63,5	2-1/2"	57,1 - 3,4	2.25" - .134"	F
94-770	53,1	20-15/16"	11,1	7/16"	9,5	3/8"	61,9	2-7/16"	57,1 - 3,5	2.25" - .134"	F
91-988	53,2	20,9"	16	5/8"	9,5	3/8"	48	1-7/8"	63,5 - 3	2.50" - .118"	S
90-242	53,3	21"	20,3	51/64"	6,8	17/64"	47	1-7/8"	80 - 4	3-1/8" - .157"	S
91-547	53,3	21"	12,7	1/2"	-	-	-	-	63,5 - 6,3	2.50" - .250"	F
91-468	53,3	21"	21	13/16"	10,3	13/32"	90	3-17/32"	57 - 4,1	2.25" - .157"	S
P627953100101	53,3	21"	9,9	.390"	-	-	-	-	50,8 - 3,4	2.00" - .134"	F
93-013	53,3	21"	15,8	5/8"	-	-	-	-	63,5 - 6,3	2.50" - .250"	F
91-078	53,3	21"	23	29/32"	-	-	-	-	63,5 - 8	2.50" - .312"	S
P6289529002	53,3	21"	17,4	11/16"	11 x 11,5	7/16" x 29/64"	40	1-1/2"	65 - 3	2.50" - .118"	F
90-152-0	53,3	21"	bow-tie	bow-tie	7,9	5/16"	63,5	2-1/2"	-	-	F
P628553300202	53,3	21"	bow-tie	bow-tie	7,9	5/16"	63,5	2-1/2"	57,1 - 3,4	2.25" - .134"	F
91-626	53,3	21"	15,8	5/8"	-	-	-	-	63,5 - 5,1	2.50" - .203"	S
91-628	53,3	21"	15,8	5/8"	-	-	-	-	76,2 - 5,1	3.00" - .203"	S
94-017	53,3	21"	11,1	7/16"	9,5	3/8"	61,9	2-7/16"	57,1 - 3,5	2.25" - .134"	F
596-900	53,3	21"	15,8 star	5/8" star	-	-	-	-	76,2 - 4,2	3" - .164"	S
P621053300101	53,3	21"	10,2	3/8"	8	5/16"	63,5	2-1/2"	50 - 3,5	2" - 1/8"	S
598-631	53,3	21"	bow-tie	bow-tie	7,9	5/16"	63,5	2-1/2"	76 - 3,8	3" - .150"	S
555350MB	53,5	21-3/32"	16	5/8"	10	3/8"	48	1-7/8"	57 - 3,5	2-1/4" - .140"	F
P621753800101	53,5	21-3/32"	15,8 star	5/8" star	9	3/8"	80	3-1/8"	57 - 4	2-1/4" - .160"	F
496-900	53,5	21-3/32"	15,8 star	5/8" star	-	-	-	-	57,1 - 4,7	2.25" - .187"	F
P6308537001	53,5	21-3/32"	16	5/8"	9,5	3/8"	47,5	1-7/8"	70 - 3,3	2.75" - .130"	S
95-621	53,5	21-3/32"	15,8	5/8"	9,5	3/8"	47,5	1-7/8"	70 - 4	2.75" - .149"	F
P622053700101	53,5	21"	24,5	15/16"	-	-	-	-	60 - 5	2-3/8" - 3/16"	S
P630753200104	53,8	21-3/16"	10,3	13/32"	7,9	5/16"	63,5	2-1/2"	76,2 - 3,9	3.00" - .149"	F
98-600	53,8	21-3/16"	10,3	13/32"	7,9	5/16"	63,5	2-1/2"	76,2 - 3,9	3.00" - .149"	F
98-093	53,8	21-3/16"	6pt.star	6pt.star	-	-	-	-	69,8 - 3,8	2.75 - 0.149	F
98-076-0	53,8	21-3/16"	6pt.star	6pt.star	-	-	-	-	71 - 3	2.795" - .118"	F
98-077-0	53,8	21-3/16"	6pt.star	6pt.star	-	-	-	-	71 - 3	2.795" - .118"	F
P6307538001	53,8	21-3/16"	10,4	7/16"	8	5/16"	63,5	2-1/2"	76,2 - 3,7	3" - .15"	S
94-084	53,9	21-1/4"	32,1	1-1/4"	-	-	-	-	97 - 2,5	3-13/16" - .100"	S
396-771	54	21-1/2"	20,6	13/16"	-	-	-	-	63,5 - 6	2-1/2" - 1/4"	F
P6305540003	54	21-1/4"	21,5	27/32"	-	-	-	-	57,1 - 3,4	2.25" - .134"	F
97-005	54	21-1/4"	21,5	27/32"	-	-	-	-	57,1 - 3,4	2.25" - .134"	F
P621754000102	54	21-1/4"	21,5	27/32"	-	-	-	-	57,1 - 3,9	2.25" - .149"	F
97-013	54	21-1/4"	21,5	27/32"	-	-	-	-	57,1 - 4,7	2.25" - .187"	F
P635854300901	54,3	21-1/3"	6pt.star	6pt.star	13	1/2"	85	3.34"	57,1 - 4	2-1/4" - .160"	F
P635854300701	54,3	21-1/3"	5pt.star	5pt.star	13	1/2"	85	3.34"	57,1 - 4	2-1/4" - .160"	F

BLADES BY LENGHT

OREGON											S F
	CM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	
P635854301001	54,3	21,4"	10	.394"	45943	1/2" - .394"	85 - 80	3.34" - 3.14"	-4	- .157	S
P635854300801	54,3	21,4"	10		-	-	-	-	-	-	S
596-356	54,3	21-3/8"	7 pt.star	7 pt.star	-	-	-	-	76,2 - 5,2	3" - .203"	F
96-340	54,6	21-1/2"	17,4	11/16"	-	-	-	-	63,5 - 5,1	2.50" - .203"	S
94-621	54,6	21-1/2"	12,7	1/2"	-	-	-	-	63,5 - 6,3	2.50"-.250"	S
P621754600101	54,6	21-1/2"	21,8	7/8"	10	3/8"	60	2-3/8"	57 - 4	2-1/4" - .16"	S
06552B	55	21-11/16"	9,5	3/8"	-	-	-	-	50,8 - 3,6	2.00"-.134"	S
P6254547001	55	2-3/16"	16	5/8"	10	3/8"	69,5	2-3/4"	90 - 3	3-9/16" - .12"	S
65552B	55,2	21-3/4"	15,8	5/8"	9,5	3/8"	47,6	1-7/8"	63,5 - 4	2.50" - .149"	S
P621055000101	55,2	21-3/4"	15,8	5/8"	9,5	3/8"	47,6	1-7/8"	50 - 3,8	2.00" - 1/8"	F
95-042	55,2	21-3/4"	15,8	5/8"	9,5	3/8"	47,6	1-7/8"	63,5 - 3,9	2.50" - .149"	F
P6305552001	55,2	21-3/4"	15,8	5/8"	9,5	3/8"	47,6	1-7/8"	57,1 - 3,4	2.25" - .134"	F
95-602	55,2	21-3/4"	15,8	5/8"	9,5	3/8"	47,6	1-7/8"	63,5 - 155	2.50" - .149"	F
94-322	55,2	21-3/4"	11,5	7/16"	-	-	-	-	57 - 3,8	2.1/4" - .149"	S
94-081	55,3	21-3/4"	35 x 20,5	1-3/8" x 13/16"	-	-	-	-	84 - 5	3-5/16" - 20"	S
94-082	55,3	21-3/4"	35 x 20,5	1-3/8" x 13/16"	-	-	-	-	84 - 5	3-5/16" - 20"	S
P6217555001	55,5	21-7/8"	10	3/8"	10,3	7/16"	101,6	4"	57 - 4	2-1/4" - .16"	F
95-073	55,6	21-7/8"	55,6	45874	15,8	45872	47,6	39630	57,1 - 3,5	2.25 - 0.134	F
P6238557001	55,7	2-3/16"	10,5	7/16"	12 x 10,5	1/2" x 7/16"	70 - 96	2-3/4" - 3-3/4"	79 - 3,5	3-1/8" - 1/8"	S
91-912	55,8	22"	15,8	5/8"	5,2	.208"	76,2	3"	69,8 - 4,1	2.75"-.164"	F
91-913	55,8	22"	15,8	5/8"	5,2	.208"	76,2	3"	70 - 4,1	2.75"-.164"	F
94-075	55,8	22"	12,7	1/2"	-	-	-	-	63,5 - 6,4	2-1/2" - .250"	F
94-077	55,8	22"	12,7	1/2"	-	-	-	-	63,5 - 6,4	2-1/2" - .250"	F
394-075	55,8	22"	12,7	1/2"	-	-	-	-	76 - 6,4	3" - .250"	F
P630355700101	56	22"	15,8	5/8"	-	-	-	-	63,5 - 3,2	2.50" - .126"	F
P6339560002	56	22-1/16"	18	11/16"	10,2	3/8"	94	3-11/16"	58,5 - 4	2-5/16" - .16"	S
P633356000201	56	22"	16	5/8"	11	7/16"	70	2-3/4"	63,5 - 6	2-1/2" - 1/4"	F
P633356000101	56	22"	16	5/8"	11	7/16"	70	2-3/4"	63,5 - 6	2-1/2" - 1/4"	F
P625556000101	56	22-1/16"	10	30/8"	8	5/16"	65	2-9/16"	55 - 4	2-3/16" - .16"	S
91-701	56,5	22-1/4"	19	3/4"	10,3	.406"	65	2-9/16"	50,8 - 5,1	2.00"-.203"	S
95-074	58,1	39651	15,8 star	5/8" star	-	-	-	-	57,1 - 3,8	2.25 - 0.149	F
596-370	58,1	22-7/8"	15,8 star	5/8" star	-	-	-	-	76,2 - 4,7	3" - .187"	F
91-363	58,5	23"	13,5	17/32"	10,3	13/32"	73	2-7/8"	63,5 - 6,3	2.50"-.250"	S
91-364	58,5	23"	13,5	17/32"	10,3	13/32"	73	2-7/8"	63,5 - 6,3	2.50"-.250"	S
P6273603001	60,5	23-13/16"	21	.827"	10,4	.410"	88	3.5"	57,1 - 3,8	2.25" - .149"	F
91-493	61,1	24-1/12"	26,7	1-1/8"	-	-	-	-	63,5 - 6,3	2.5 - 0.250	F
55620LB	61,5	24-13/64"	18	0.70"	8,8	.350"	65	2,6	55 - 4,4	2.16" - .175"	F
55620RB	61,5	24-13/64"	18	0.70"	8,8	.350"	65	2,6	55 - 4,4	2.16" - .175"	F
55620RMB	61,5	24-13/64"	18	0.70"	8,8	.350"	65	2,6	55 - 4,4	2.16" - .175"	F
55620LMB	61,5	24-13/64"	18	0.70"	8,8	.350"	65	2,6	55 - 4,4	2.16" - .175"	F
P633162000101	62,2	24-1/2"	18	0.70"	8,8	.350"	192	7,55	55 - 3	2.16" - 3	F
P6285620001	62,2	24-1/2"	18	0.70"	8,8	.350"	192	7,55	55 - 3	2.16" - 3	F
96-341	62,2	24-1/2"	15,8	5/8"	-	-	-	-	63,5 - 5,1	2.50" - .203"	S
90-342	62,2	24-31/64"	32	1-1/4"	10	31/32"	80	3-5/32"	88 - 3	3.46"-.120"	S
90-285	62,2	24-31/64"	32	1-1/4"	10,6./8,2.	27/64./21/64.	80./170.	3 5/32./6.69	79 - 6,3	3.11" - .250"	F
90-286	62,2	24-31/64"	32	1-1/4"	10,6./8,2.	27/64./21/64.	80./170.	3 5/32./6.69	79 - 6,3	3.11" - .250"	F
396-717	62,4	24-9/16"	29	1.141"	-	-	-	-	63,5 - 6,3	2-1/2" - 0.250"	S
90-280	62,4	24-9/16"	29	1-5/32"	-	-	-	-	65 - 7,2	2.55" - .283"	F
P6236630002	63	24-13/16"	20	0.79"	-	-	-	-	80 - 4,4	3.15" - .173"	S
P6217630001	63	24-13/16"	26	1"	-	-	-	-	57 - 4	2-1/4" - .16"	S
91-395	63,1	24-31/32"	23,1	.910"	-	-	-	-	63,5 - 7,8	2.50" - .312"	S
93-025	63,3	24-15/16"	15,8	5/8"	-	-	-	-	63,5 - 6,3	2.50"-.250"	F
P6236630001	63,5	25"	20	13/16"	6,5	1/4"	47	1-7/8"	80 - 5	3-1/8" - 3/16"	F
596-797	63,5	25"	20	13/16"	-	-	-	-	80 - 4,7	3" - .187"	S
P6227642001	63,5	25"	24,5	15/16"	-	-	-	-	70 - 4	2-3/4" - 5-32"	F
96-602	63,5	25"	19	3/4"	-	-	-	-	57 - 6,3	2.50" - .250"	S
P6225633001	63,5	25"	19	3/4"	-	-	-	-	63,5 - 6,3	2.50"-.250"	F
90-704	63,5	25"	16	5/8"	-	-	-	-	63,5 - 6,3	2.50" - .250"	S
94-040	64	25-3/16"	12,7	1/2"	-	-	-	-	63,5 - 6,3	2.50"-.250"	F

OREGON											S F
	CM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	
96-705	64	25-3/16"	12,7	1/2"	-	-	-	-	63,5 - 6,3	2.5 - 0.250	F
P637564000101	64	25-3/16"	13	1/2"	8	5/16"	48	1-7/8"	120 - 5	4-3/4" - .20"	F
P637564000201	64	25-3/16"	13	1/2"	8	5/16"	48	1-7/8"	120 - 5	4-3/4" - .20"	F
94-073	64	25-3/16"	12,7	1/2"	-	-	-	-	63,5 - 6,4	2-1/2" - .250"	F
P6285651001	65,1	25-5/8"	18	0.70"	8,8	.350"	65	2-1/2"	"57 - 3	2.24" - .12"	S
P6223660001	66	26"	10,3	.406"	8	5/16"	63,5	2.50"	63 - 4,5	2.50 - .21"	S
P629967300101	67,3	26-1/2"	18,5	3/4"	9	3/8"	65	2-9/16"	55 - 5	2-3/16" - .20"	F
P6299673003	67,3	26-1/2"	18,5	3/4"	9	3/8"	65	2-9/16"	55 - 5	2-3/16" - .20"	S
94-049	68,5	27"	12,7	1/2"	-	-	-	-	63,5 - 6,4	2-1/2" - .250"	F
P625570900101	71	28"	18	0.70"	8,8	.350"	65	2-1/2"	55 - 4	2.16" - 1/8"	S
55709MB	71	28"	18	0.70"	8,8	.350"	65	2-1/2"	55 - 4	2.16" - 1/8"	S
P6255709005	71	28"	18	0.70"	8,8	.350"	65	2-1/2"	55 - 4	2-1/8" - 5-32"	S
P622871100101	71,1	28"	27	1-1/16"	14,2	9/16"	190,5	7-1/2"	69,8 - 4,1	2.75"-.164"	F
79-728	71,1	28"	27	1-1/16"	13,5	1/2"	190,5	7-1/2"	67 - 5	2-5/8" - .20"	-
P637571600101	71,6	28-3/16"	13	1/2"	8	5/16"	48	1-7/8"	120 - 5	4-3/4" - .20"	F
P637571600201	71,6	28-3/16"	13	1/2"	8	5/16"	48	1-7/8"	120 - 5	4-3/4" - .20"	F
91-999	76	29,9"	6pt.star	6pt.star	-	-	-	-	-	-	S
P6299760002	76	29-15/16"	18,5	3/4"	9	3/8"	65	2-9/16"	55 - 5	2-3/16" - .20"	S
98-032	76,1	29-31/32"	10,3	13/32"	7,9	.315"	63,5	2.50"	76,2 - 3,8	3.00" - .149"	F
91-399	76,2	30"	17,4	11/16"	-	-	-	-	63,5 - 5,1	2.50" - .203"	F
97-009	76,2	30"	21,7	.855"	-	-	-	-	69,8 - 4,2	2.75"-.149"	F
96-630	76,2	30"	27	1-1/16"	14,2	9/16"	190,5	7-1/2"	70 - 4,1	2.75"-.187"	S
P6228762001	76,2	30"	27,3	1-1/16"	13,5	1/2"	190,5	7-1/2"	67 - 5	2-5/8" - .20"	S
97-330	76,3	30-1/16"	21,5	.850"	-	-	-	-	69,8 - 3,7	2.75"-.149"	F
94-021	79,8	31-7/16"	15,8	5/8"	-	-	-	-	63,5 - 4,7	2.50"-.187"	F
P6228838001	83,8	33"	27	1-1/16"	14,2	9/16"	19,5	7-1/2"	69,8 - 4,7	2.75" - .187"	F
96-633	83,8	33"	27	1-1/16"	14,2	9/16"	190,5	7-1/2"	70 - 4,7	2.75"-.187"	S



MORE THAN 75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged. Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents. Engineering is the bedrock of our reputation.




Discover more of our products at
OregonProducts.com



OREGON[®]

PRODUCT AND BRAND PROMOTION

PBP_1.2
EN/EUR

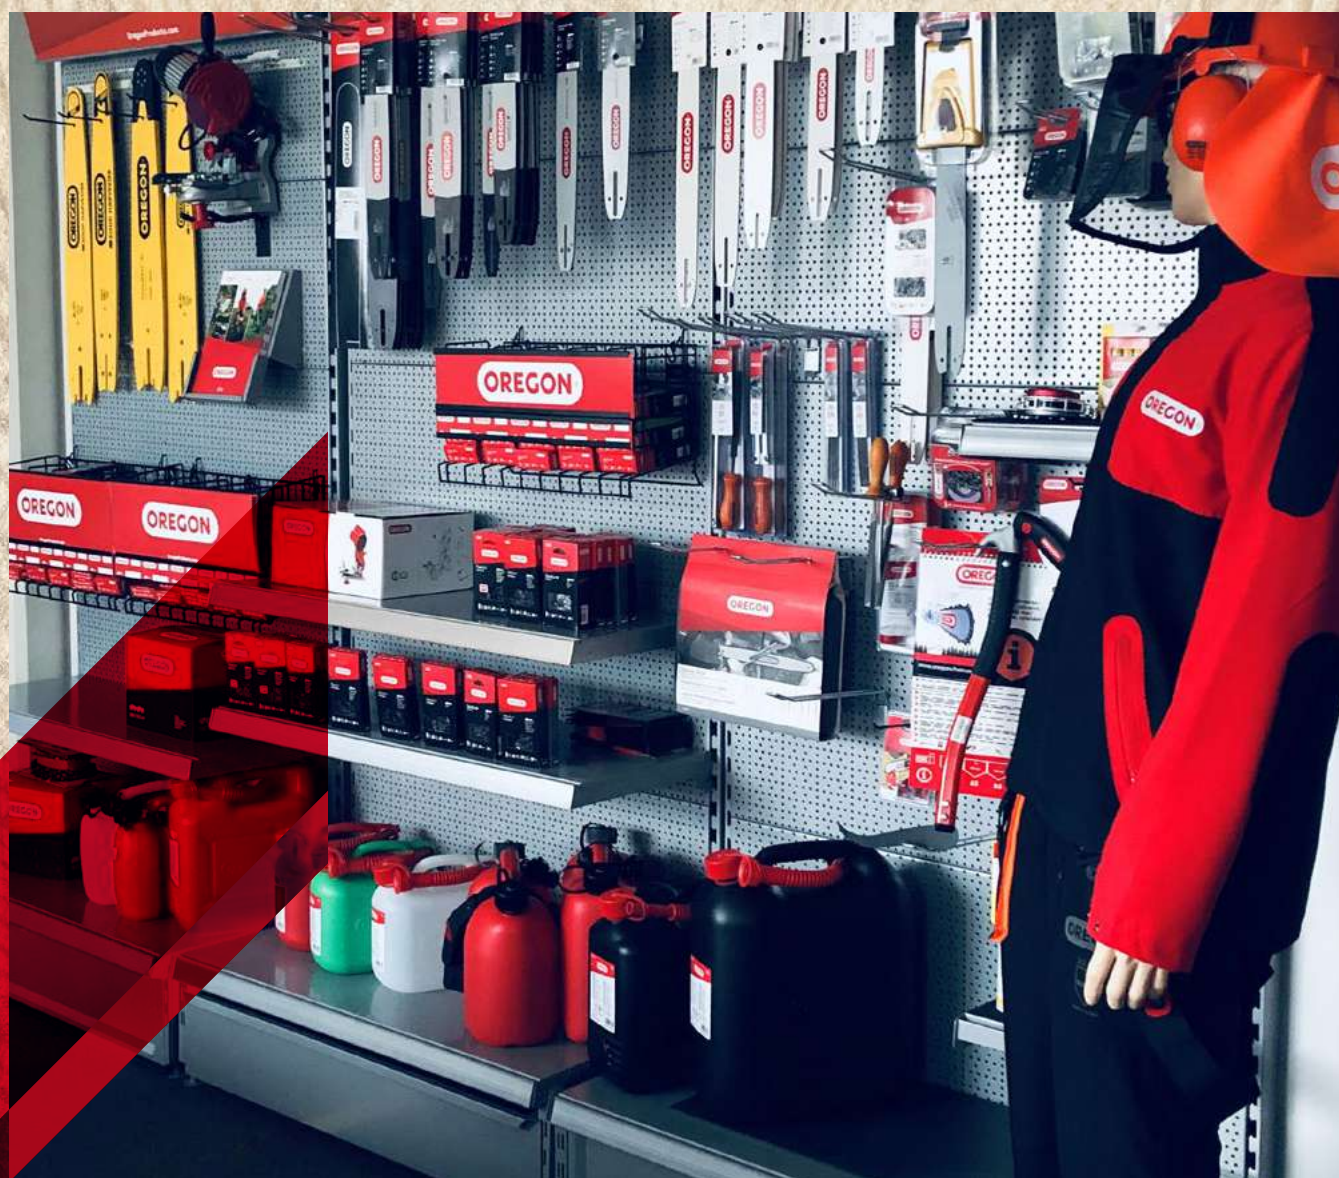



Enduser product flyers

OREGON	SPECIFICATIONS	
AD400-015EN	Trimmer head flyer, 10x21, EN	50
AD400-016EN	Maintenance flyer, 10x21 EN	50
AD400-017EN	PPE flyer, 10x21, EN	50
AD400-018EN	Saw chains and Guide bars flyer, 10x21, EN	50
AD400-019EN	OPE flyer, 10x21, EN	50
AD400-020EN	70EXL flyer, 10x21, EN	125
AD400-021EN	Nylium Silencio flyer, 10x21, EN	125





Counter cardboard displays

	OREGON	SPECIFICATIONS	
1	AD600-290	Counter display for 10x21cm flyers	1
2	AD600-300	Counter display, base, Small	1
	AD600-302EN	Top card, small, generic, EN	1
3	CB-AD600-302EN	Full display, small, generic, EN	1
	AD600-306EN	Top card, small, spark plug, led, EN	1
4	CB-AD600-306EN	Full display, small, spark plug, led, EN	1
	AD600-307EN	Top card, small, chain, EN	1
5	CB-AD600-307EN	Full display, small, chain, EN	1
6	AD600-301	Counter display, base, Large	1
7	AD200-600	Counter display Large	1



Standalone displays

	OREGON	SPECIFICATIONS	
1	AD600-200	Volume box, colored range	1
2	AD600-210	Volume box, yellow range	1
3	AD600-220	Volume box, premium range	1
4	AD600-224	Volume box, plastic pallet (not illustrated)	1
5	AD200-608	Metalbase for floor standing display (base only)	1
	AD401-061	Display cordless standalone, eu	
	AD401-070	Headercard, ope standalone display	
8	AD200-580	Rolling merchandiser	
9	AD200-598	Rolling merchandiser, header card	
10	AD600-111	PPE display, 80cm x 80cm x 140cm Height-adjustable pediment 300cm Easy transport thanks to wheels Storage capacity: 44 pants/bib and brace or 72 jackets or 32 pairs of shoes → possibility to combine articles	1
11	AD600-111EN	PPE display Cardboard panel (4pce set) EN	1
12	AD600-111FR	PPE display Cardboard panel (4pce set) FR	1




contact us



NEW

MERCHANDISERS


Modular merchandising solution to meet your market needs and fulfill your expectations

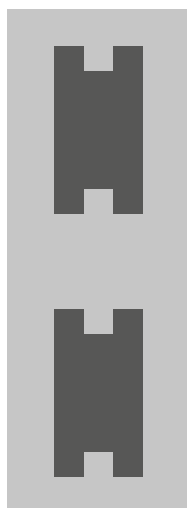**POLE**

Large H holes of 15 mm x 28 mm

BACK PANEL

Round holes of 5 mm Ø and space between them is 15 mm (center to center) and 25 mm (center to center) on the next line.

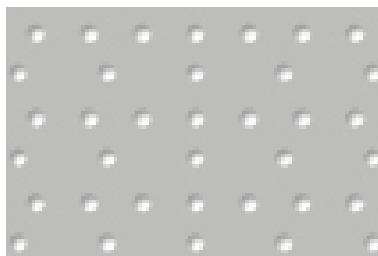

NEW **CB-M1525-220-G**

Tegometal® compatible

All our accessories will fit this merchandiser, but some specific accessories need an adaptor.



Merchandisers

NEW

CB-M1525-220-G

CB-M1525-220-B

	OREGON	SPECIFICATIONS	
1	M1525-140-1-R	Merchandiser, 140cm, Poles, Red, part 1/3	1
	M1525-140-2-G	Merchandiser, 140cm, Grey, part 2/3	1
	M1525-080-4-G	Merchandiser, extra 80cm, Grey, part 3/3	1
2	M1525-140-1-R	Merchandiser, 140cm, Poles, Red, part 1/3	1
	M1525-140-2-B	Merchandiser, 140cm, Black, part 2/3	1
	M1525-080-4-B	Merchandiser, extra 80cm, Black, part 3/3	1
3	M099-040-EN	Big Merchandiser Oregon header card ENGLISH	1
	M099-040-FR	Big Merchandiser Oregon header card FRENCH	1
	M099-040-DE	Big Merchandiser Oregon header card GERMAN	1

Hanging Hooks


	OREGON	SPECIFICATIONS	
1	M100-030	Standard Hooks 30cm (10 pack)	10
2	M102-030	Hook 30cm with price holder (+ price tag)	30
3	AD200-311	Hooks for guide bars	1
4	AD200-329	Hook for side panel	1
5	AD200-539	Hook for brushcutter blades	1
	AD200-603	White magnetic hook for side panel	1
	AD401-081	Hook single for 1m display	



Merchandisers shelves

	OREGON	SPECIFICATIONS	
8	M100-037	Grey Shelf, with brackets 100 x 37cm (TEGO compatible)	1
8	M100-037-B	Black Shelf, with brackets 100 x 37cm (TEGO compatible)	1
9	AD200-531	Shelf kit with dividers (TEGO compatible)	1
10	AD200-533	Inclinable brackets for shelf *	2
11	AD200-532	Brackets for shelf (CB-AD200-010)	2
12	AD200-534	Dividers (37 x 15cm)	4
13	AD200-535	Dividers (37 x 5,5cm)	4
	AD200-538	Basket with 5 dividers (TEGO compatible)	1
	AD200-588	Support for dividers x2	2
16	AD200-315	Shoe shelf (100 x 45cm) ⚠	1
17	AD200-316	Divider for shoe display shelf AD200-315	1
18	AD200-327	Adapter for tegometal pole	1

Special product accessories

	OREGON	SPECIFICATIONS	
19	M200-317	Clothing rail	1
20	AD200-313	Heavy weight support (for AD200-314) ⚠	1
21	AD200-314	Bead tube hanger	1
22	AD200-319	Metal hanger for trousers	10
23	AD200-326	Metal hanger for jackets	10
24	AD200-579	Chain dispenser	1
25	AD200-599	Header card for chain dispenser	1
26	AD600-230	Spark plug, metal, dispenser	1
27	AD200-270	One for all blades shelf for merchandiser	1
28	AD200-587	Orange Promo Tag	10

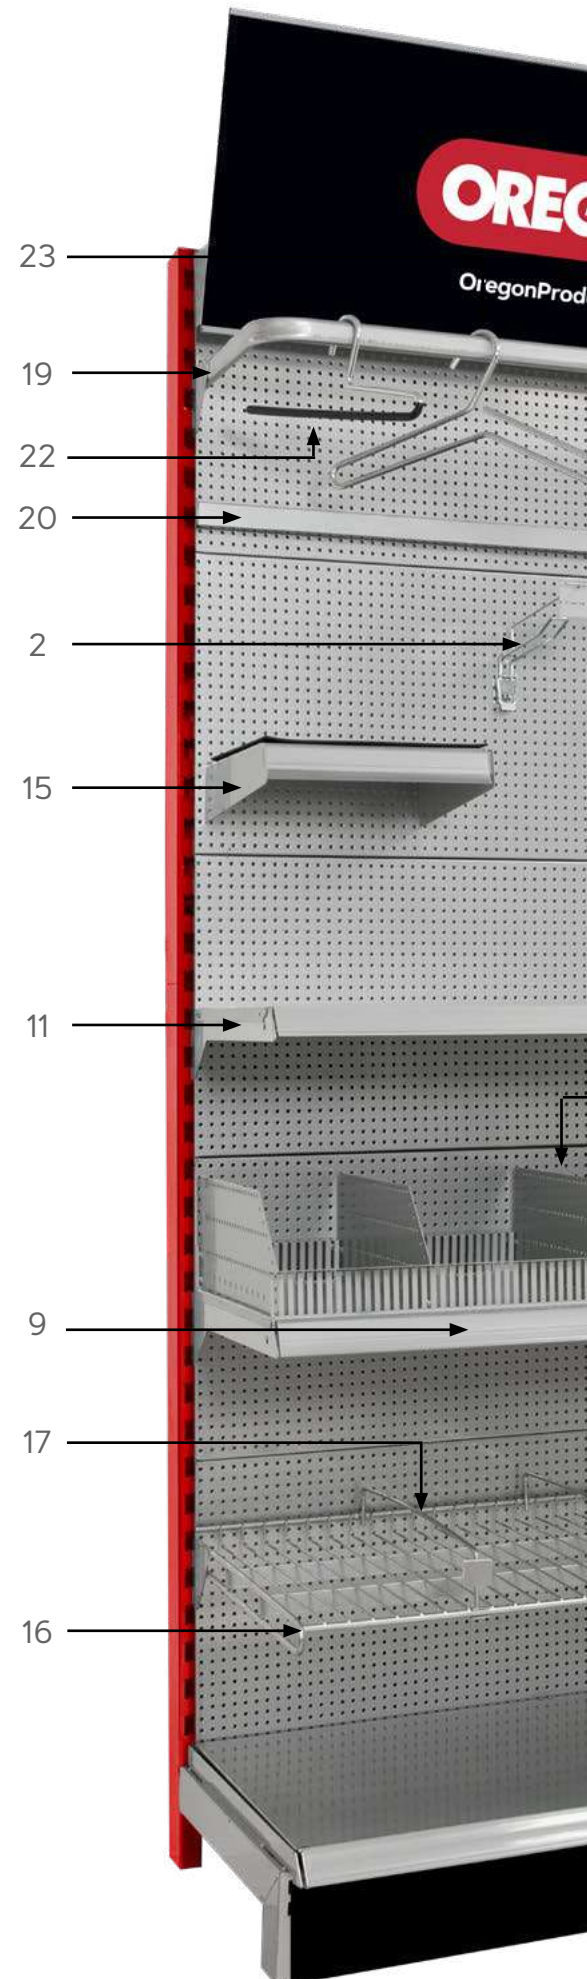

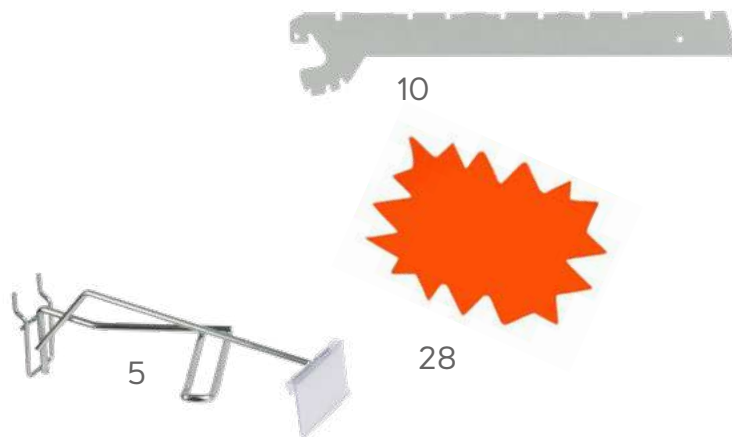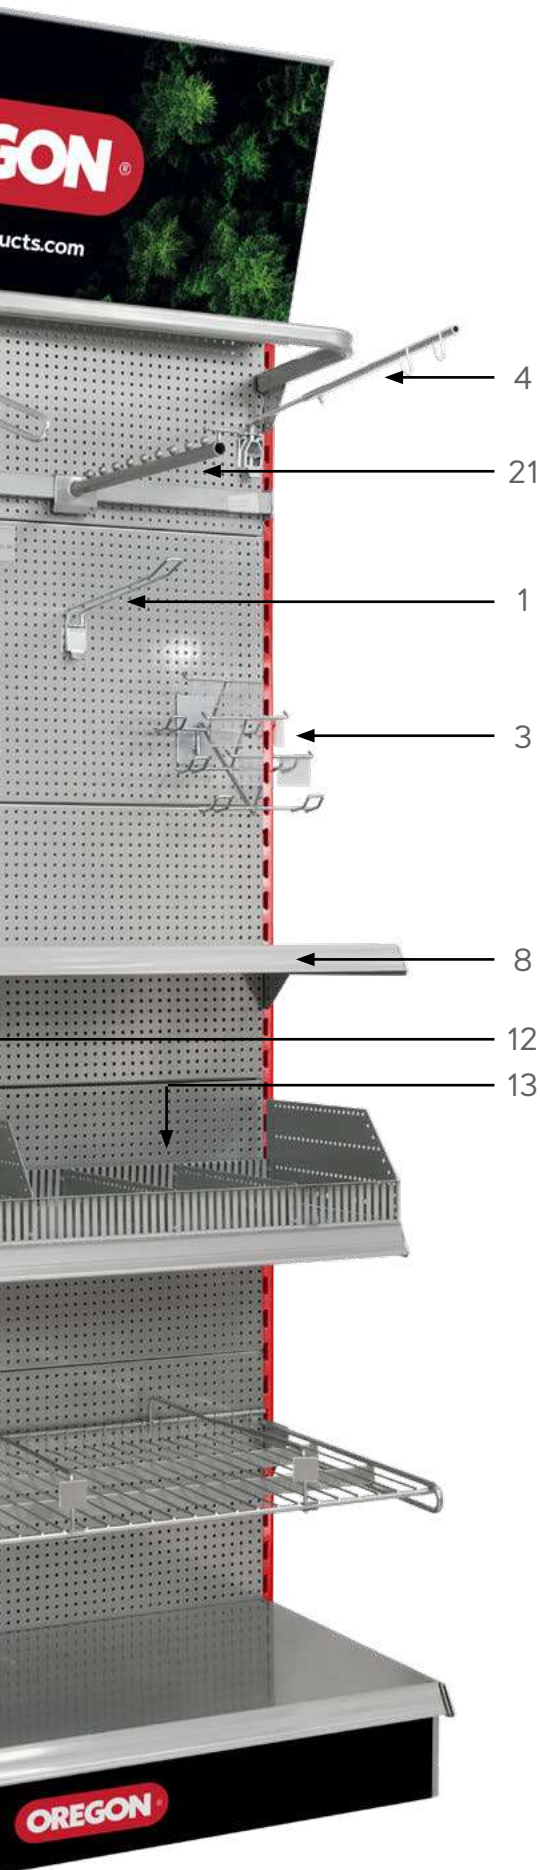

contact us



Additional adapter required

AD200-327 Adapter (1pce)

Clothing accessories

	OREGON	SPECIFICATIONS	
1	AD200-180	Glasses Merchandiser (without glasses)	1
2	AD200-130	Dummy head grey	1
3	AD200-065	Dummy, full body, 190cm	1






3



Flags

	OREGON	SPECIFICATIONS	
1	AD403-011H	Horizontal Flag 100x150 cm	1
2	AD403-011V	Vertical Flag 95x250 cm	1
3	AD403-012V	Vertical Outdoor Flag 120x300 cm	1
4	AD403-012	Beachflag 85x220 cm	1
5	AD403-013	Beachflag, base oregon	


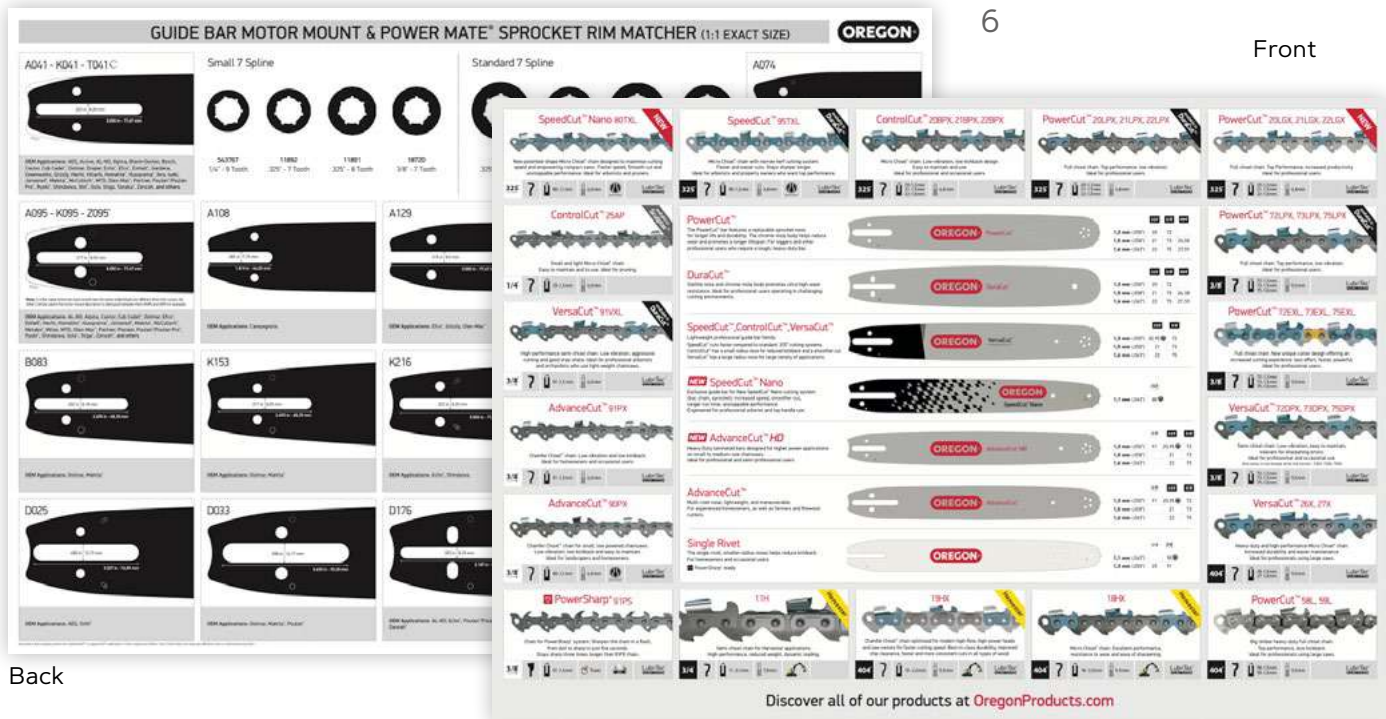


In store material

	OREGON	SPECIFICATIONS	
6	AD600-250EN	Oregon Counter mat 66,5x47 cm, EN	1
7	533129	Chain Scale, 15x180 cm EN	1
8	AD200-595	Oregon Embossed metal plate	1
9	AD200-597	Oregon front door opening hour sign	1
	AD301-845	Oregon dealer panel	1

Sticker

	OREGON	SPECIFICATIONS	
11	AD403-010S	Oregon sticker, Small 24x60 mm	50
12	AD403-010L	Oregon sticker, Large, 380x150 mm	25
13	AD200-617	Oregon Sticker 360x100 mm	1

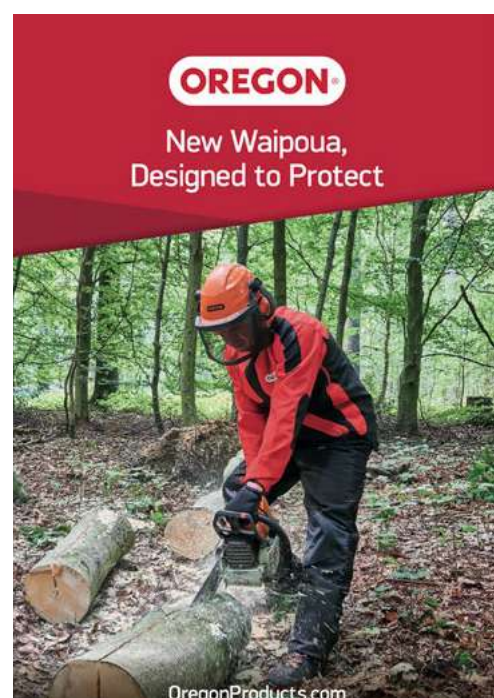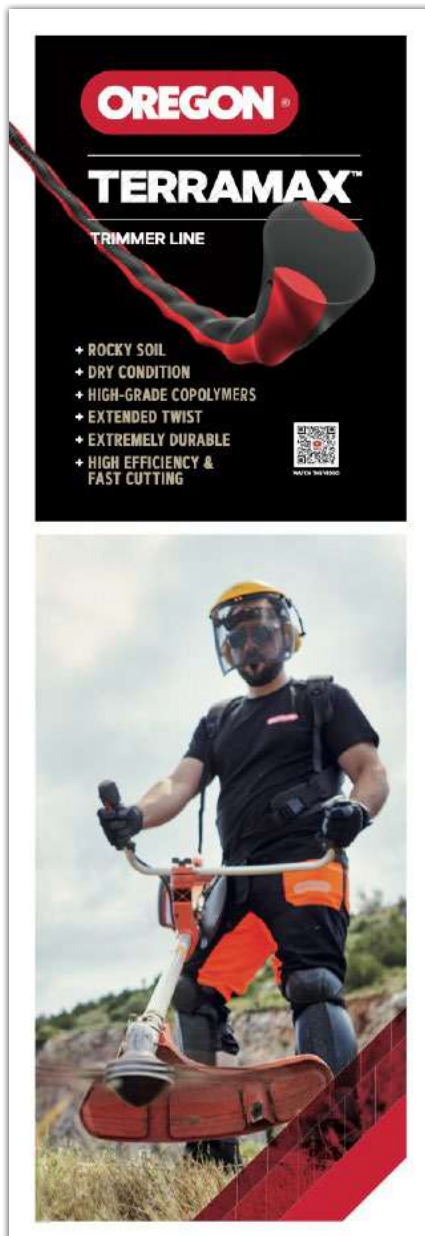

	OREGON	Specifications	
1	AD403-008	SpeedCut Note pad	1
2	AD301-881	Sticker, speedcut	1
3	AD600-140EN	Totem SpeedCut Nano EN 620x1900mm	1
4	AD600-142-EN	Totem TerraMax EN 620x1900mm	1
5	AD600-130EN	Waipoua poster A1 EN	1

Special event gift

	OREGON	Specifications	
6	AD302-023C	2023 Oregon calendar, 297x420mm Wall poster included	1
	AD302-019E	Envelope C3 for calendar, 310x440mm	1



Special for your events or fairs


contact us



contact us

Technical Posters for your shop (50x70cm)

contact us

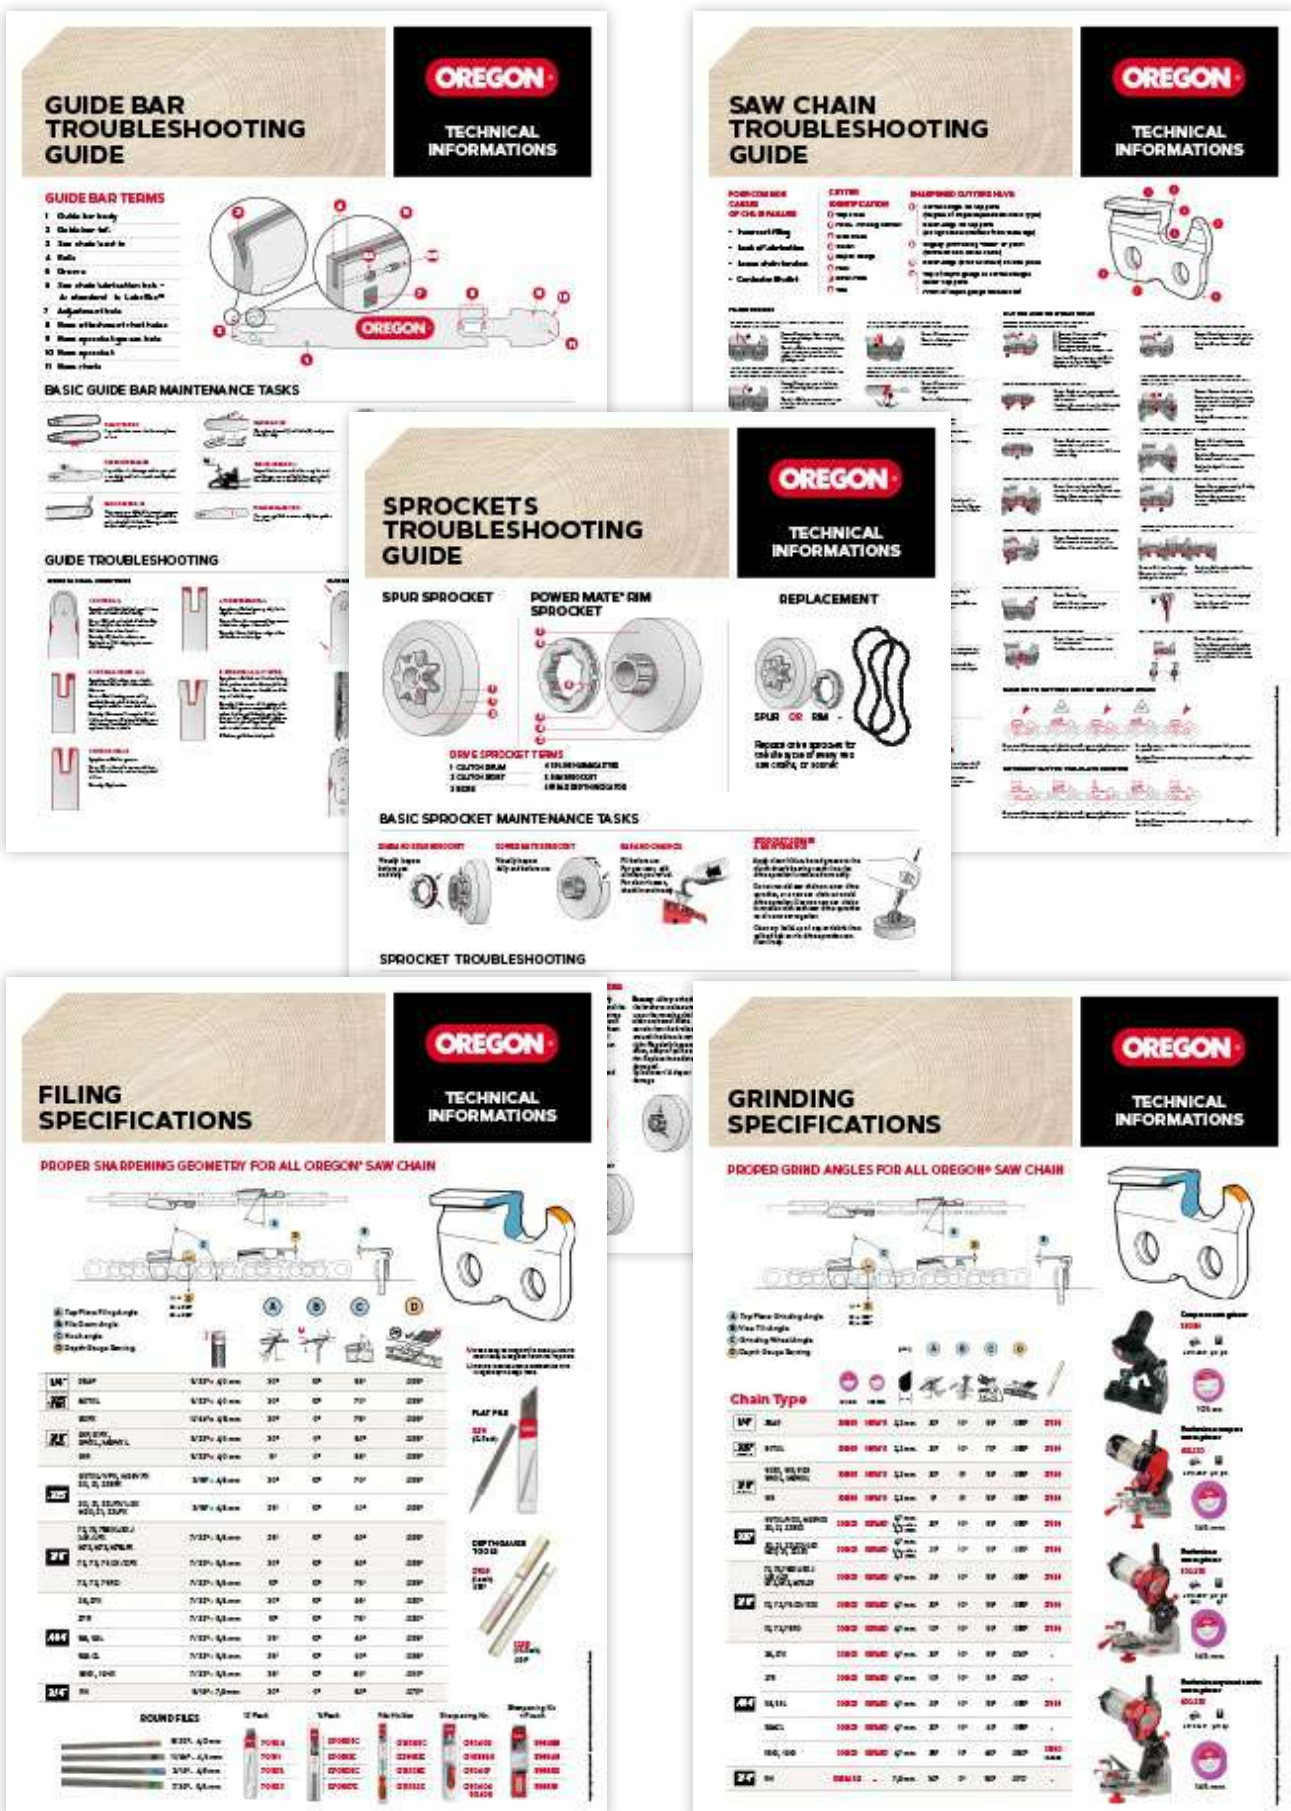



MORE THAN 70 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged. Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents. Engineering is the bedrock of our reputation.



Discover more of our products at
OregonProducts.com